



MATING PARTS:




SCALE:-1:2

CCD:-	56mmØ
AREA:-	271.97
WEIGHT:-	.731Kg
WEIGHT RANGE:-	
PERIMETER:-	246.54
ALLOY:-	6063
TEMPER:-	T6
FINISH:-	MILL FINISH
IXX / IYY:-	Ixx: 73535.75mm ⁴ Iyy: 23701.21mm ⁴
ORDERING LENGTH:-	5800mm

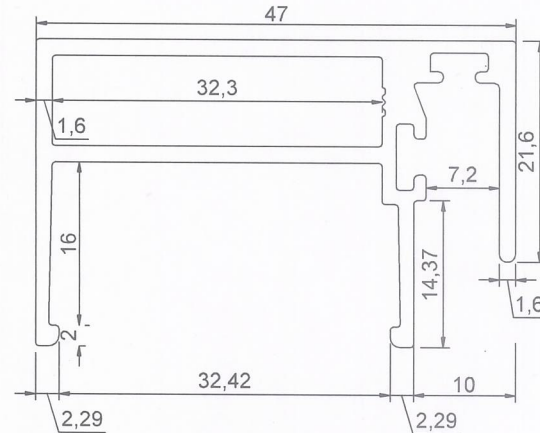


SCALE:2:1



UNSPECIFIED TOLERANCE WILL BE ACCORDANCE WITH DEN EN 12020 -2:2008

TOLERANCE ON CROSS SECTIONAL											
0.0-10	10-15	15-30	30-45	45-60	60-90	90-120	120-150	150-180	180-240	240-300	300-350
±0.15	±0.20	±0.25	±0.30	±0.40	±0.45	±0.60	±0.80	±1.0	±1.2	±1.5	±1.8
TOLERANCE ON WALL THICKNESS:											
0.0-2.0	2.0-3.0	3.0-6.0	6.0-10	10-15	15-20	20-30					
±0.15	±0.15	±0.20	±0.25	±0.30	±0.35	±0.40					



SCALE-1:1



DESCRIPTION:
SLIM INTERLOCK SGU SHUTTER

PROFILE CODE:

UNSPECIFIED RADIUS:- 0.30mm

STATUS:	FOR APPROVAL	SCALE:	AS SHOWN	DRAWN BY:	SIMMY
DIE CODE:	T-208	REV DATE:		CHECKED BY:	SUMIT K
REV NR:	R0	SHEET:		DATE DRAWN:	13-08-2021

- SIGHT SURFACE (VISIBLE SURFACE WHEN WINDOW IS IN CLOSED POSITION)
- NON-SIGHT SURFACE (VISIBLE WHEN WINDOW IS IN OPEN POSITION)
- HIDDEN (NOT VISIBLE AT ALL)