

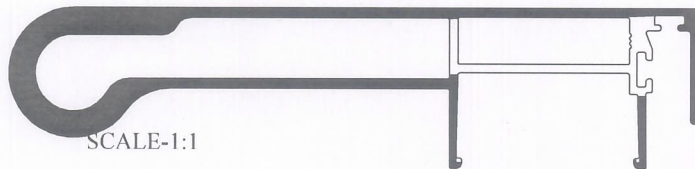


MATING PARTS:

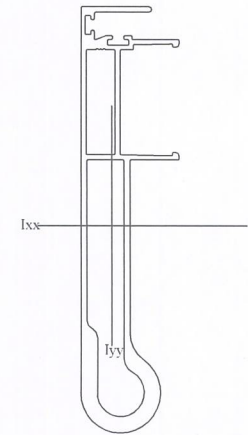

SCALE:-1:2

CCD:-	123mmØ
AREA:-	796.78
WEIGHT:-	2.20Kg
WEIGHT RANGE:-	
PERIMETER:-	414.56
ALLOY:-	6063
TEMPER:-	T6
FINISH:-	MILL FINISH
IXX / IYY:-	Ixx:1455097.73mm4 Iyy:47335.18mm4
ORDERING LENGTH:-	5800mm

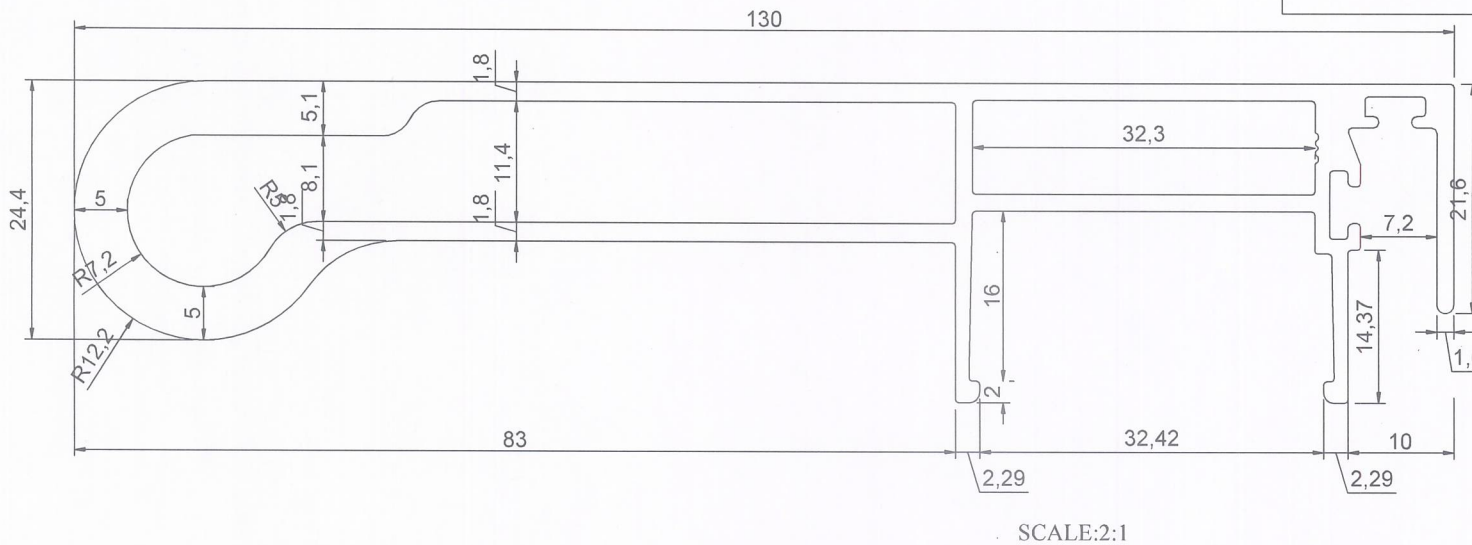

Approved  
20/04/22

CONTROLLED COPY

AIS GLASS SOLUTIONS  
Auth. Signatory

UNSPECIFIED TOLERANCE WILL BE ACCORDANCE WITH DEN EN 12020 -2:2008

TOLERANCE ON CROSS SECTIONAL:											
0.0-10 ±0.15	10-15 ±0.20	15-30 ±0.25	30-45 ±0.30	45-60 ±0.40	60-90 ±0.45	90-120 ±0.60	120-150 ±0.80	150-180 ±1.0	180-240 ±1.2	240-300 ±1.5	300-350 ±1.8
TOLERANCE ON WALL THICKNESS:											
0.0-2.0 ±0.15	2.0-3.0 ±0.15	3.0-6.0 ±0.20	6.0-10 ±0.25	10-15 ±0.30	15-20 ±0.35	20-30 ±0.40					



DESCRIPTION:  
SLIM INTERLOCK REINFORCED SHUTTER

PROFILE CODE:

UNSPECIFIED RADIUS:- 0.30mm

STATUS:	FOR APPROVAL	SCALE:	AS SHOWN	DRAWN BY:	SIMMY
DIE CODE:	T-210	REV DATE:		CHECKED BY:	SUMIT K
REV NR:	R0	SHEET:		DATE DRAWN:	13-08-2021

- SIGHT SURFACE (VISIBLE SURFACE WHEN WINDOW IS IN CLOSED POSITION)
- NON-SIGHT SURFACE (VISIBLE WHEN WINDOW IS IN OPEN POSITION)
- HIDDEN (NOT VISIBLE AT ALL)