


Q03303

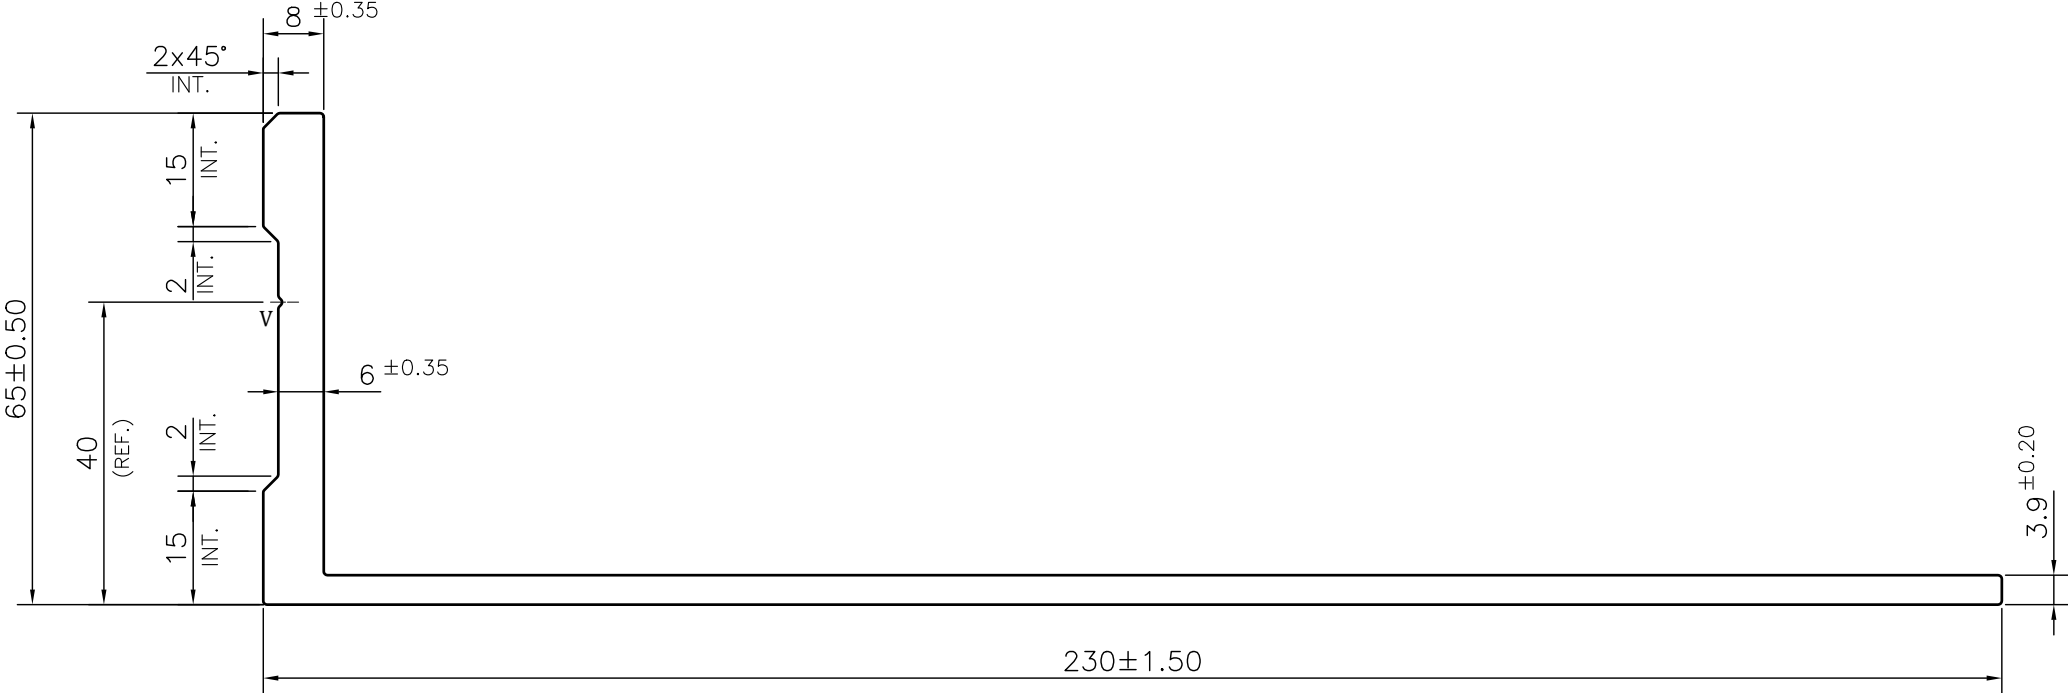

NOTE:-
V= 0.5x90° V-GROOVE (1 PLACES)

ROUND OFF ALL SHARP CORNERS WITH 0.50 mm.

- 1. STRAIGHTNESS= 1.0mm/M
- 2. TWIST= 1.0mm/M
- 3. ANGULARITY= ±1°
- 4. FLATNESS= ±1.0mm

UNCONTROLLED COPY

1) THE WELDING LINE IN THE EXPOSED SURFACE OF PROFILE IS UNAVOIDABLE. 2) PLEASE SPECIFY IMPORTANT SIZES. 3) PLEASE SPECIFY IF THIS PROFILE MATCHES WITH OTHER PROFILES. 4) PLEASE SPECIFY EXPOSED SURFACE. OTHER WISE CONSIDERED AS NO EXPOSED SURFACE. 5) FINISH :- ☐ MILL FINISH / ☐ ANODIZING / ☐ POWDER COATING

 SYMBOL OF QUALITY AN ISO 9001 COMPANY JINDAL ALUMINIUM LTD. <i>BHIWADI-301019 (INDIA)</i>			NAME	DATE
		DRAWN	ASHUTOSH	14-06-2024
		CHECKED		
		APPROVED		
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm. 3. TOLERANCES WILL BE AS PER EN 12020-2 , UNLESS OTHERWISE SPECIFIED		SCALE		1:1
		AREA mm ²		1317.171
		PERIMETER mm.		589.61
		WEIGHT kg/m		3.556
PARTY'S NAME	WINNTUS ALUMINIUM FORMWORK		DRAWING No.	SECTION No.
PARTY'S DRAWING No.	AS PER DRAWING		P-JAL-B-616	-
ALLOY & TEMPER	6061 T6	PRODUCT CODE:-029		-
		HSN CODE:- 76042990		-
DESCRIPTION	FORM WORK SECTION-L SECTION- 65x225			