
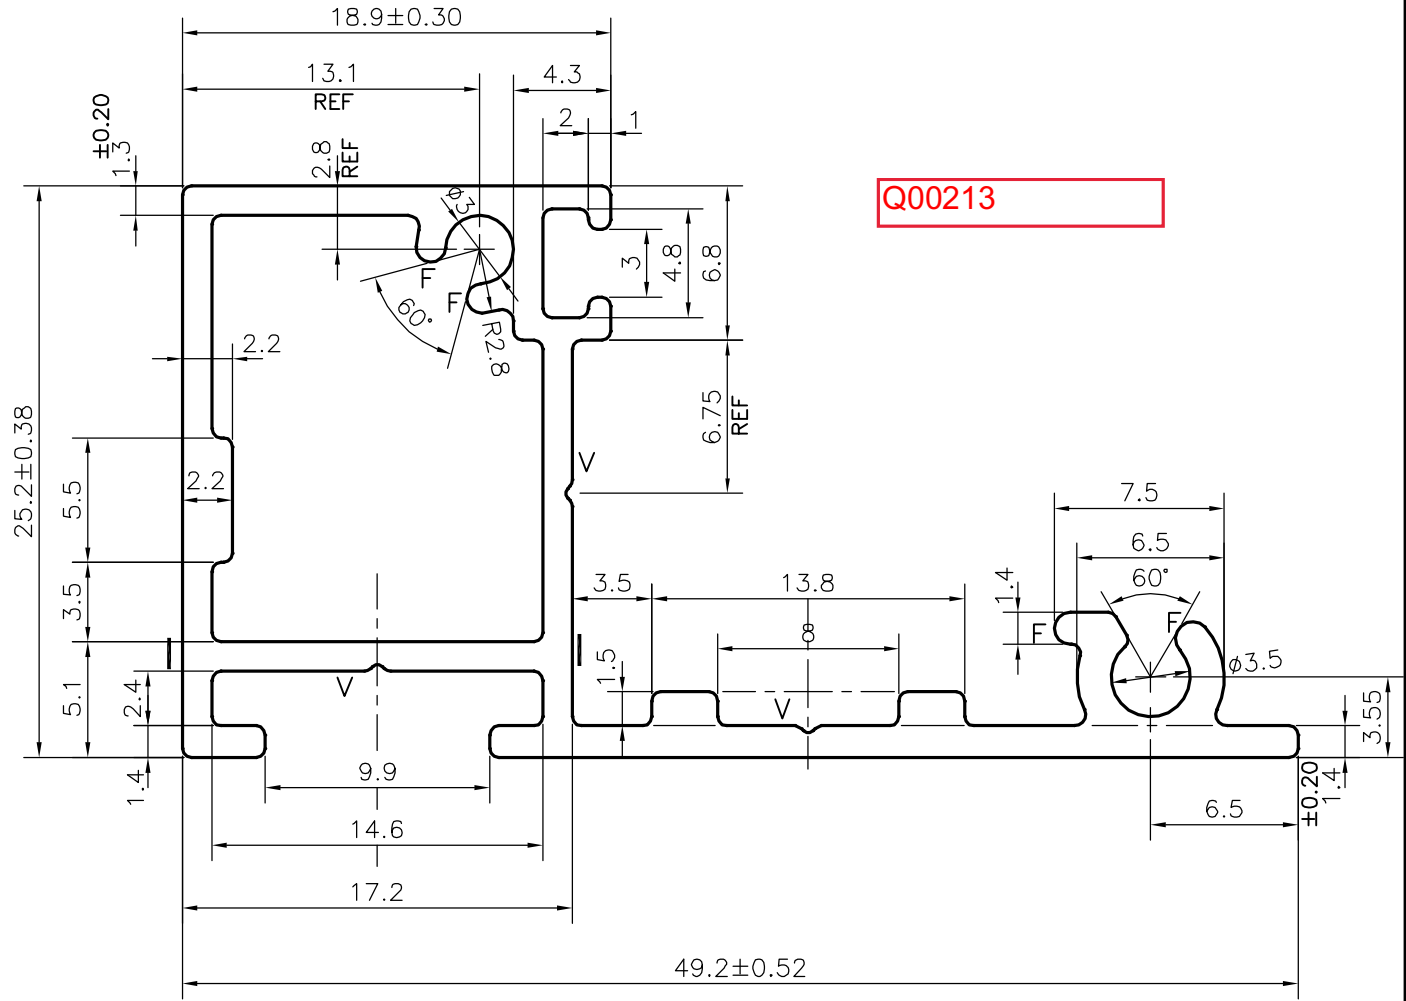


P-24551

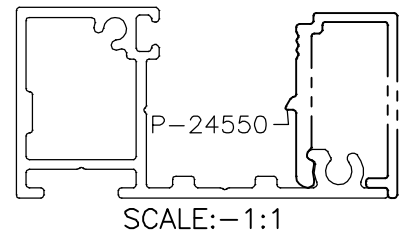


Q00213

F= FULL RADIUS (4 PLACE)
 V = V GROOVE 0.3x90° (3 PLACES)
 1. STRAIGHTNESS=1.7mm/M
 2. TWIST=1.7mm/M
 3. ANGULARITY= ±2°
 4. FLATNESS =0.007xWIDTH

PLEASE NOTE:-
 — DUE TO THICKNESS VARIATION IMPRESSION MARK MAY APPEAR IN THIS MARKED PORTION.

1) THE WELDING LINE IN THE EXPOSED SURFACE OF PROFILE IS UNAVOIDABLE. 2) PLEASE SPECIFY IMPORTANT SIZES. 3) PLEASE SPECIFY IF THIS PROFILE MATCHES WITH OTHER PROFILES. 4) PLEASE SPECIFY EXPOSED SURFACE. OTHER WISE CONSIDERED AS NO EXPOSED SURFACE. 5) FINISH :- MILL FINISH / ANODIZING / POWDER COATING

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		NAME	DATE
			DRAWN	J.P.KAUSHIK
			CHECKED	
			APPROVED	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983, UNLESS OTHERWISE SPECIFIED			SCALE	3:1
			AREA mm ²	198.809
			PERIMETER mm.	198.736
			WEIGHT kg/m	0.537
			DRAWING No.	SECTION No.
PARTY'S NAME			ALUMINIUM TRADING COMPANY, NEW DELHI	
PARTY'S DRAWING No.			AS PER SAMPLE	
ALLOY & TEMPER			6063 T6	
			PRODUCT CODE:-056	
			HSN CODE:-76042100	
DESCRIPTION			ARCHITECTURAL SECTION	