

ITEM	QTY	PART NAME	PART NUMBER	MATERIAL	REMARK	MASS (Kg.)
1	1	INNER PART	Y001977-D11	EN AW 6082 T6 OR COMPAREABLE		0,084kg


VER	PLS	DESCRIPTION	CHD BY	DATE	APD BY	ECR
A	-	INITIAL RELEASE	JB			XXXX

CHANGES OF PREMATERIAL , DESIGN, PROCESS, TOOLS OR SUPPLIERS REQUIRE APPROVAL BY PRODUCT DEVELOPMENT.

PART FREE OF CRACKS AND BURRS.




DELIVERY CONDITION:
SURFACES TO BE FREE OF GRAPHITE, SILICONE COMPOUNDS, MOLYBDENUM DISULPHIDE, SULFUR, GREASE AND DIRT.

Q03475

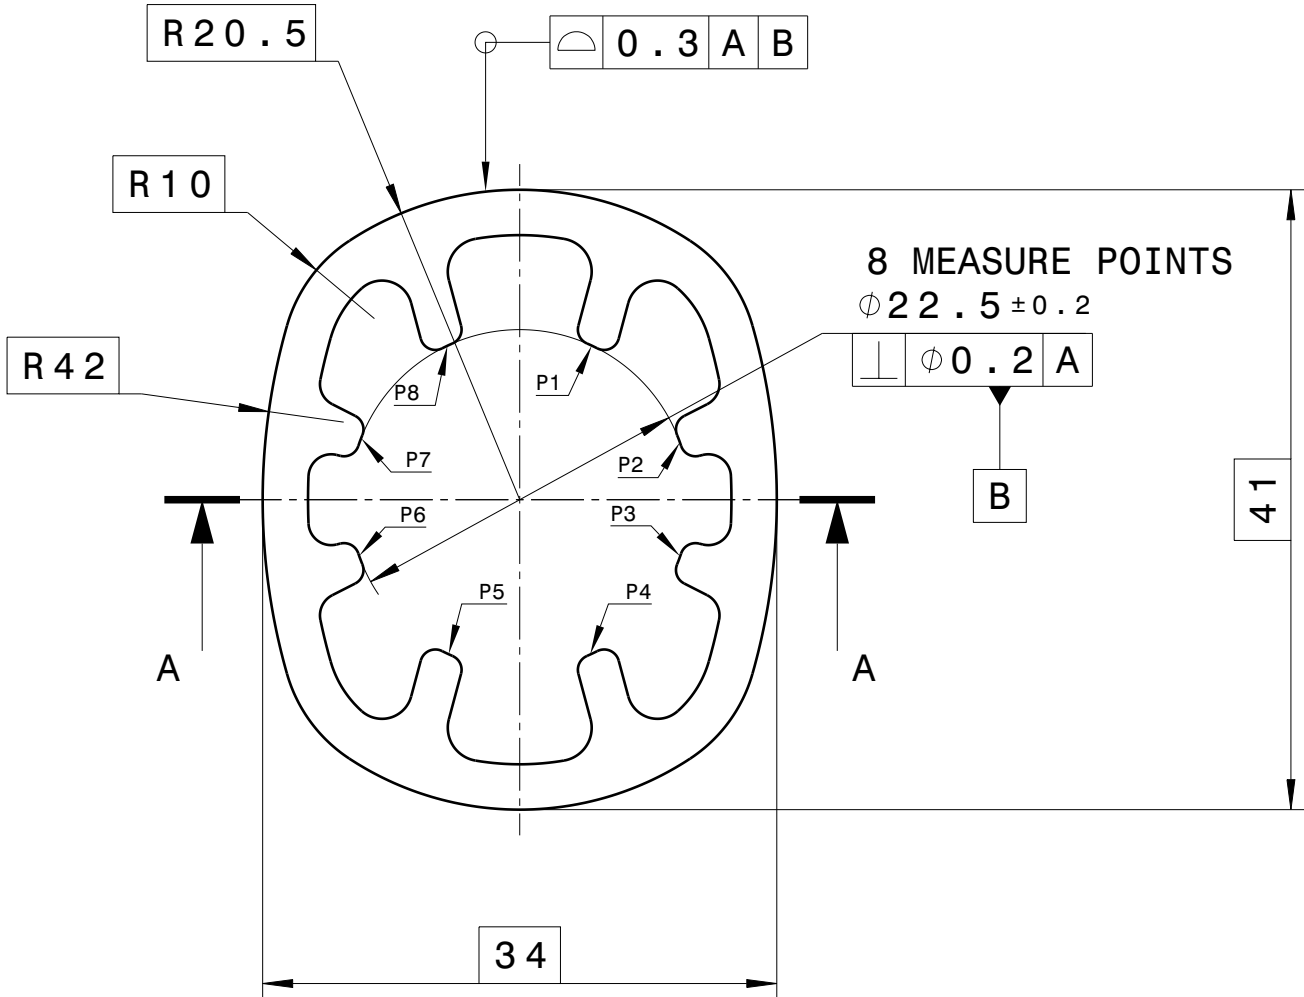


TEDs ACCORDING TO DATA: Y001977-D11
ALL SURFACES 0.5 UNLESS OTHERWISE SPECIFIED.

0.2 EDGES acc.
DIN ISO 13715

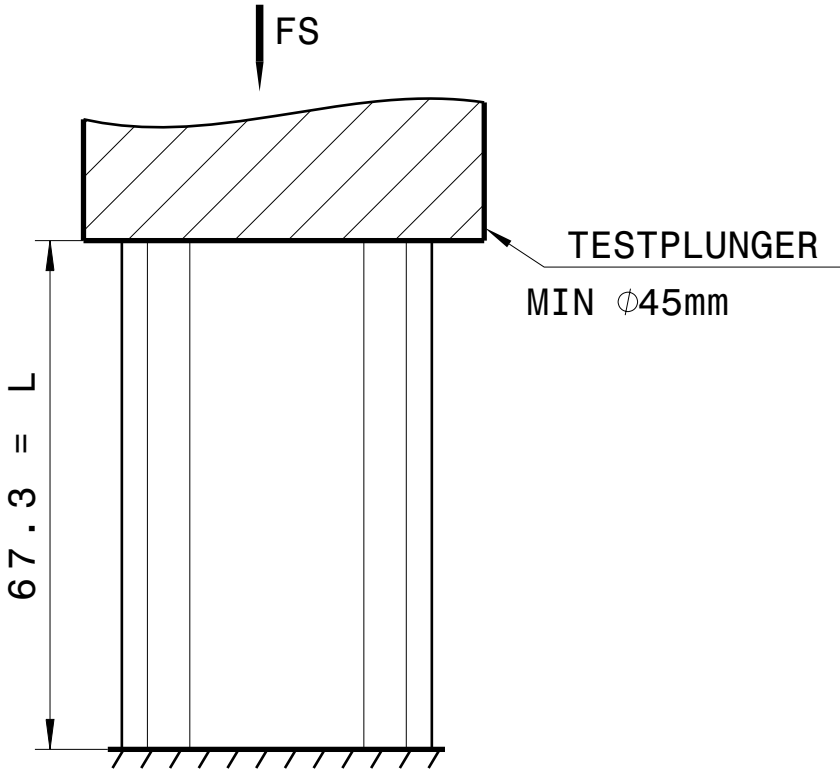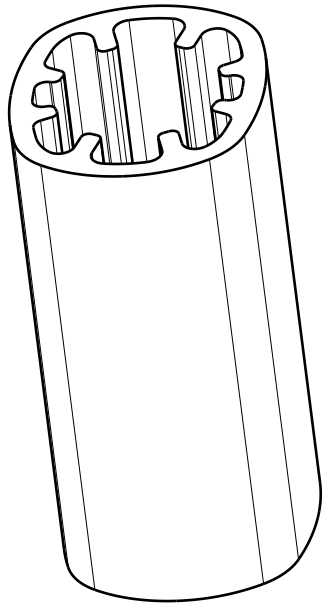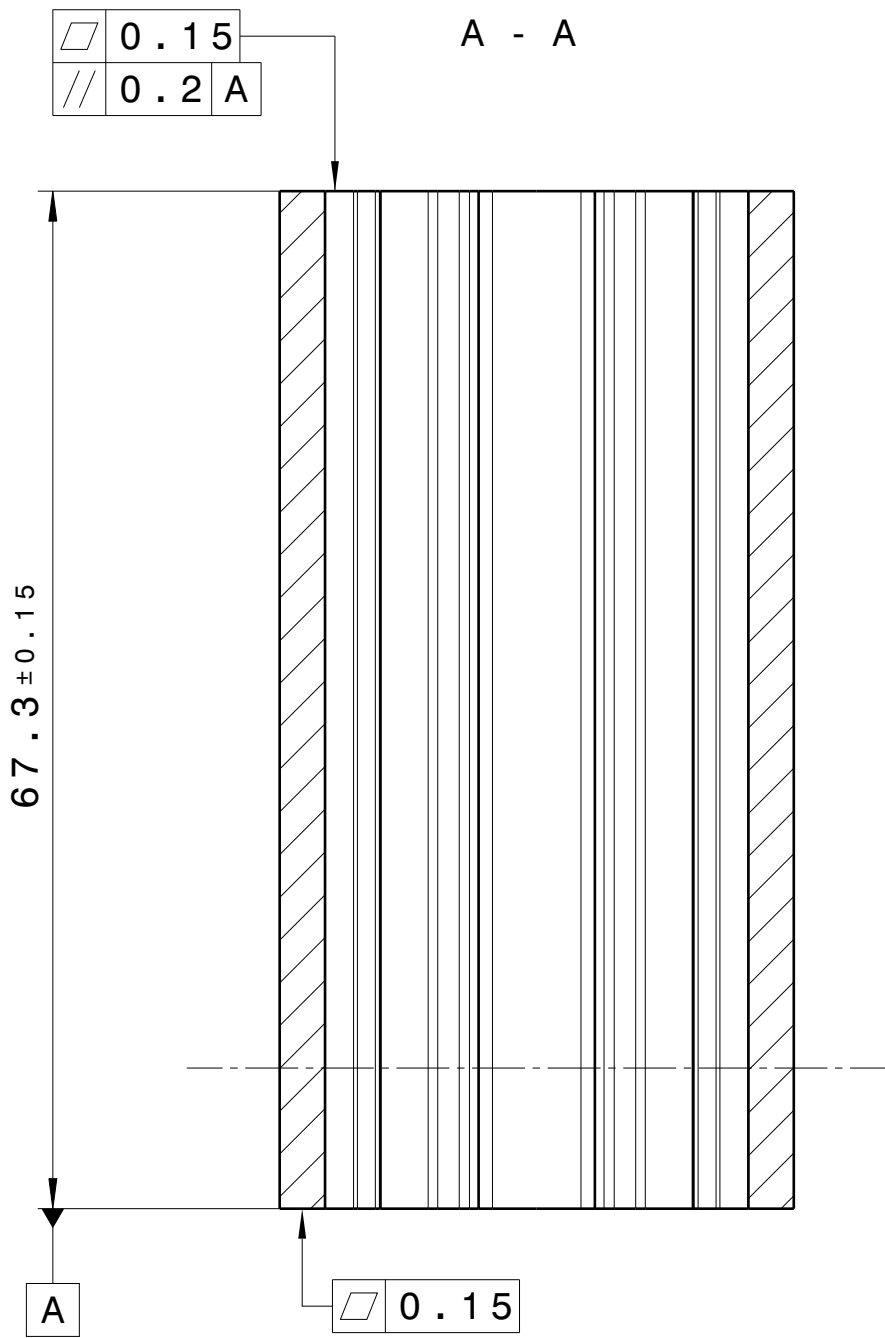

Compression test
Core stability: FS_{t-1} = 120kN ; FSt-2 = 0.5*FSt-1
Strain velocity: x to 2 mm/min
Max. permanent compression s ≤ 0.2% of L[mm]

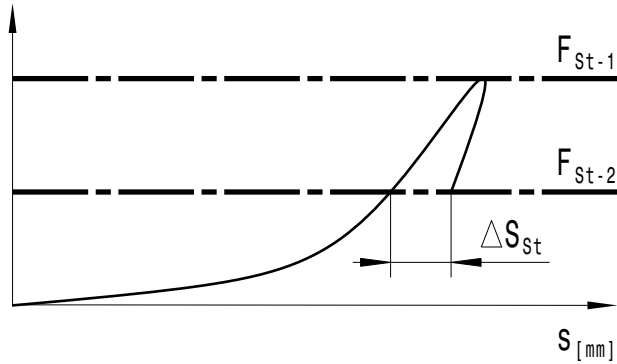

DRN.BY: J.BUSCH	14MAY25	PROPERTY OF ANP	
APD.BY: S.SIEKER	14MAY25	THIS DRAWING IS THE SOLE PROPERTY OF ANP. IT CANNOT BE COPIED BY ANYONE WITHOUT WRITTEN PERMISSION OF ANP	
CAD SYSTEM: CATIA V5	PROTECTION MARK: ISO 16016		
TOLERANCED: EN 755-9	ISO 8015	UNIT - MM SCALE - 2:1 SHEET - A2	MODEL IS MASTER FOR ALL NON-DIMENSIONED FEATURES
MASS: 0,084kg	0 CALCULATED - ACTUAL	THIRD ANGLE PROJ	
CUST REFERENCE NO. XXXXX		PRODUCTION REFERENCE NO. XXXXX	
		TITLE: INNER PART	
		PART NO.: Y001977-D11	A