

M/S. AHMAD NEW PRODUCTS



Pt. No.

Q03478

VER.	P.L.S.	DESCRIPTION	CHD BY	DATE	APD BY	ECR
A	2	INITIAL PRODUCTION RELEASE	RPC	24APR24	JV	1591
B	2	1. MODIFIED MATERIAL 2. TOLERANCES WERE +0.25	RPC	23JAN25	JV	2579
C	1	1. WAS 2.0 +0.2	RPC	03MAR25	JV	2626
D	1	1. WAS Ø83.2 ±0.3	RPC	14MAY25	JV	2815

Date: 23-5-25 - 11.44 AM

MUST BE ABLE TO BE
REDUCED TO Ø80.23
WITHOUT CRACKS

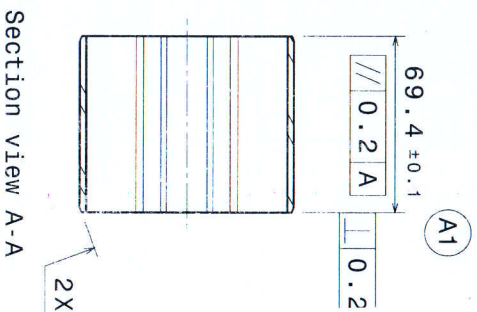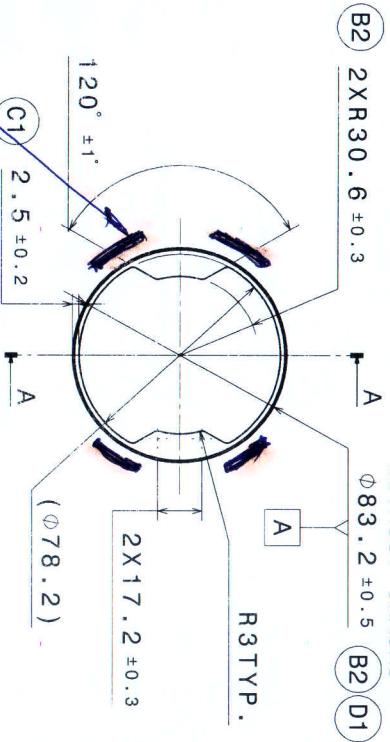

Section view A-A

→ DUE TO THICKNESS VARIATION
WE MAY GET IMPRESSION
MARKED THESE PLACES

PROPOSAL DRAWING

MATERIAL: ALUMINUM 6063-T6


(A2) (B1)

DELIVERY CONDITION:
SURFACES TO BE FREE OF GRAPHITE,
SILICONE COMPOUNDS, MOLYBDENUM
DISULPHIDE, SULFUR AND DIRT.

CONTROL COPY
Issue Date : 16/05/2025
Issued By : ABHISHEK

0.2 EDGES ACC.
DIN ISO 13715

Isometric view



DRN. BY: R. CHURCH	24APR24	PROPERTY OF ANP	THIS DRAWING IS THE SOLE PROPERTY OF ANP. IT CANNOT BE COPIED BY ANYONE WITHOUT WRITTEN PERMISSION OF ANP	TITLE:
APD. BY: J. VANCE	24APR24			
CAD SYSTEM: CATIA V5	PROTECTION MARK: ISO 16015			
TOLERANCES: ISO 2768-mk ISO 8015 DIN 16901 (PLASTIC)	ISO 3302-1/3 (RUBBER)			
CUST. REFERENCE NO. XXXXX		PRODUCTION REFERENCE NO. 728 0	PART NO.: U-ET01607-S12 D	