
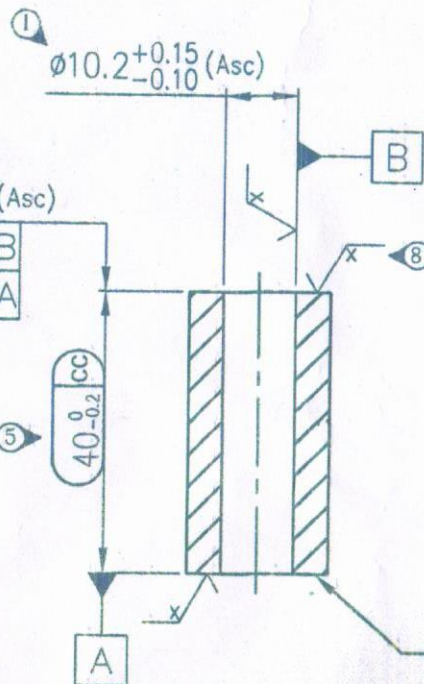

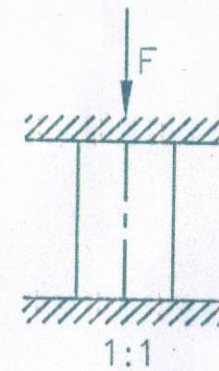


Q03672

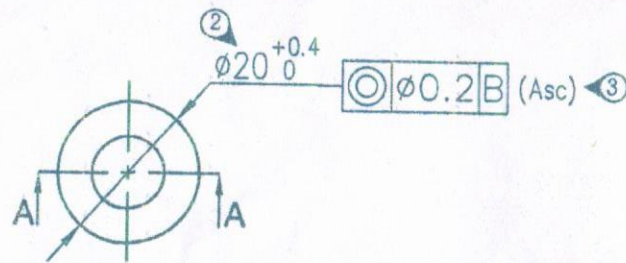

SECTION A-A

NOTES:

1. TOLERANCES ACC TO ISO 2768-mK, ISO 8015, EN 754-1.
2. (Asc) DENOTES ANAND's SPECIAL CHARACTERISTICS.
3. DENOTES BALLOONING FOR INSPECTION ONLY.

CONTROL COPY
WHEN IN RED
Issue Date... 18/11/18... (i)
Issued By... *[Signature]*

SPECIAL CHARACTERISTICS
FOR SC (SIGNIFICANT CHARACTERISTICS)
FOR CC (CRITICAL CHARACTERISTICS)
CAPABILITY IS REQUIRED.

COMPRESSION TEST L_{IN} 452-A:
57 kN; ≤ 0.15 mm
MATERIAL:
EN-755 - AW 6082 T6
Rp 0.2 ≥ 260 N/mm²

CC

DRN.BY: - N.NANDAN
CHD.BY: - R.K.LAKRA
APD.BY: - K.KAUSHIK


PROPERTY OF ANP
This drawing is the SOLE-
PROPERTY of ANP. It should
not be copied by any-one
without written permission of ANP.



ANAND NVH PRODUCTS (P) LTD.
N.H-8 SECTOR-35 GURGAON
HARYANA-122001(INDIA)

DATE: -08-10-2009 REF.No.-782.121.143.327(D)
MATERIAL GRADE RUBBER:-
STEEL:-

UNIT - MM
SCALE-1:1
SHEET - A4



TITLE: - INNER TUBE

HARDNESS: - CAL. WEIGHT: -25 gm

FILE: -

PART NO.: - M-6801-B04

S.NO.	SYM.	MODIFICATIONS	DATE	NAME
03.				
02.				
01.				

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---