
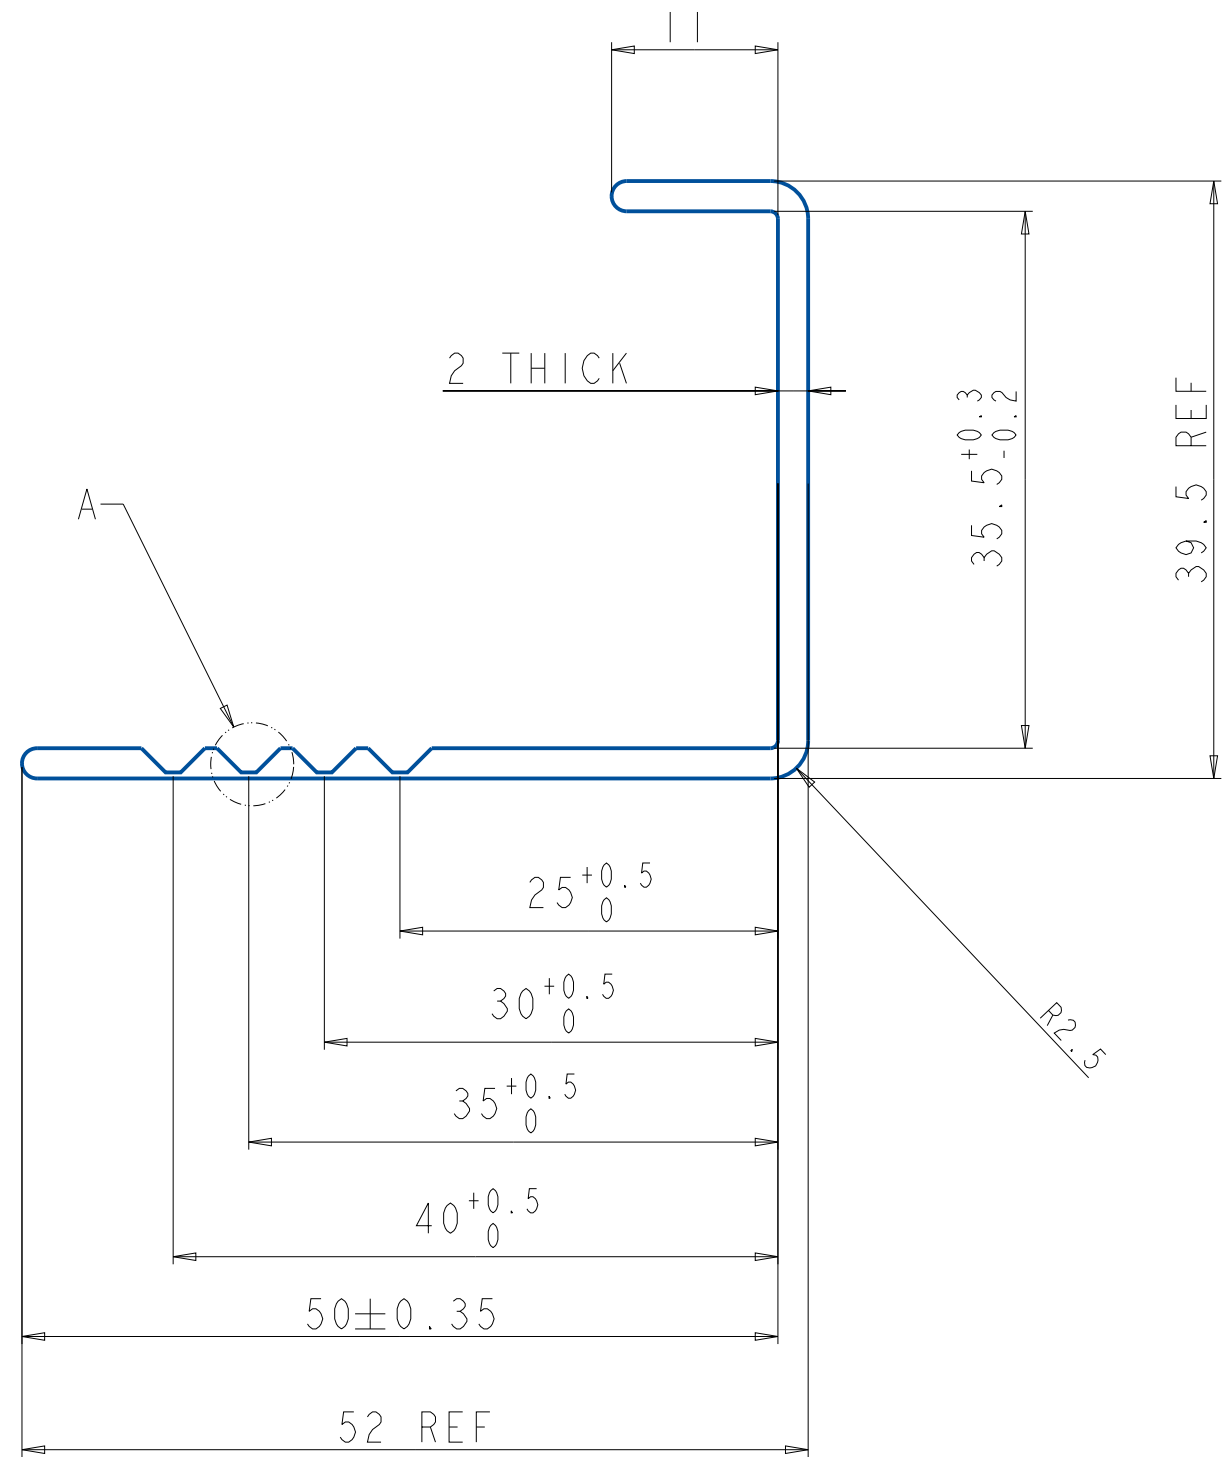


Revision History			
Rev	Description	Date	Approved

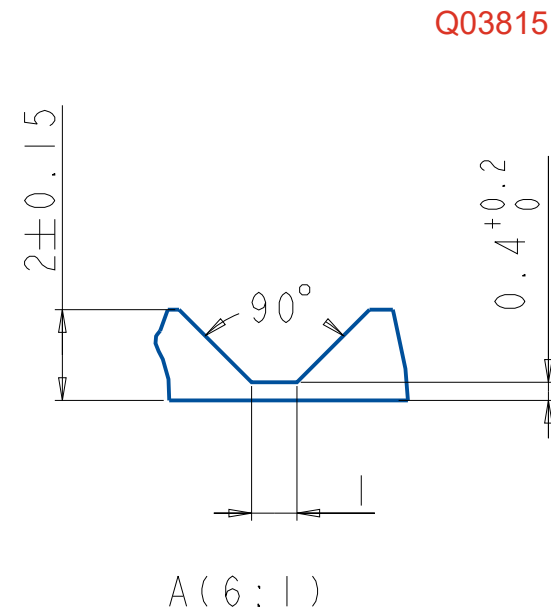

TOLERANCES UNLESS
OTHERWISE SPECIFIED

MACHINING REQUIREMENTS	
BREAK SHARP CORNERS AND EDGES 0.2 MAX FILLET RADIUS 0.4 MAX C SINK INT. THREADS 90° TO MAJOR DIA CHAMFER EXT. THREADS 45° TO MINOR DIA	
GENERAL TOLERANCES:	
0 - 30 $\pm$ 0.2	HOLES 0-10 $^{+0.2}_{-0.05}$
30 - 500 $\pm$ 0.3	HOLES 10+ GEN.TOL
500 - 1000 $\pm$ 0.5	ANGLES $\pm$ 0.5°
1000 + $\pm$ 1	
DIMENSIONS IN MM. DO NOT SCALE DWG. DIMENSIONS APPLY AFTER COATING	


MATERIAL

AL6063-T5

FINISH

ANODIZE

MIL-A-8625 TYPE I CLASS 1



DESIGNER

HAIM S.

DES_TEL

APPROVER

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS
PROPRIETARY AND NO PORTION OF THIS DOCUMENT MAY BE
COPIED, USED OR DISCLOSED FOR ANY PURPOSE EXCEPT AS
AUTHORIZED IN WRITING BY AIRTOUCH



airtouch

DRAWING No.

164-100-3500-01

REV

00

STATUS

DESCRIPTION

BEND-BRIDGE_FOR_PANEL-35-01

PROJECT

BRIDGE-35

SCALE

2:1

SIZE

A3

SHT

1/1