


P-26460

-

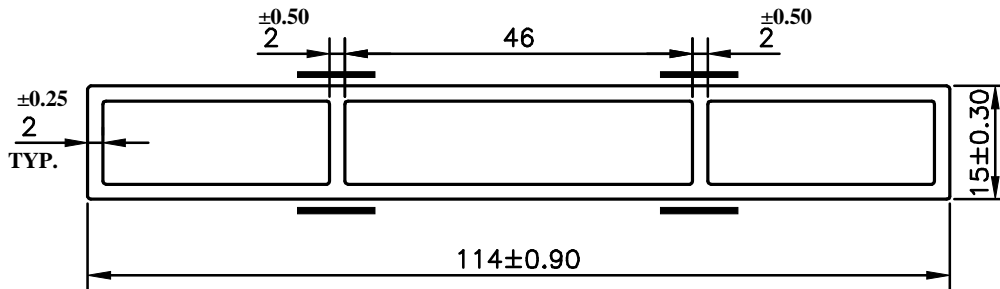


PLEASE NOTE:-

— DUE TO THICKNESS VARIATION IMPRESSION MARK MAY APPEAR IN THIS MARKED PORTION. HOWEVER WE WILL TRY TO MINIMIZE

UNCONTROLLED COPY

- 1. STRAIGHTNESS= 1.7mm/M
- 2. TWIST= 1.7mm/M
- 3. ANGULARITY= ±2°
- 4. FLATNESS= 0.007xWIDTH

1) THE WELDING LINE IN THE EXPOSED SURFACE OF PROFILE IS UNAVOIDABLE. 2) PLEASE SPECIFY IMPORTANT SIZES. 3) PLEASE SPECIFY IF THIS PROFILE MATCHES WITH OTHER PROFILES. 4) PLEASE SPECIFY EXPOSED SURFACE. OTHERWISE CONSIDERED AS NO EXPOSED SURFACE. 5) FINISH :- MILL FINISH / ANODIZING / POWDER COATING

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		NAME		DATE	
			DRAWN		ADITYA N	27-11-2023
			CHECKED			
APPROVED						
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED			SCALE		1:1	
			AREA mm ²		544.275	
			PERIMETER mm.		257.313	
			WEIGHT kg/m		1.47	
PARTY'S NAME		RG FACADE SOLUTIONS., GHAZIABAD.		DRAWING No.		SECTION No.
PARTY'S DRAWING No.		AS PER AUTOCAD DRAWING		P-26460		-
ALLOY & TEMPER		6063 T6		PRODUCT CODE:-048		-
DESCRIPTION		WINDOW SECTION		HSN CODE:-76042100		-