


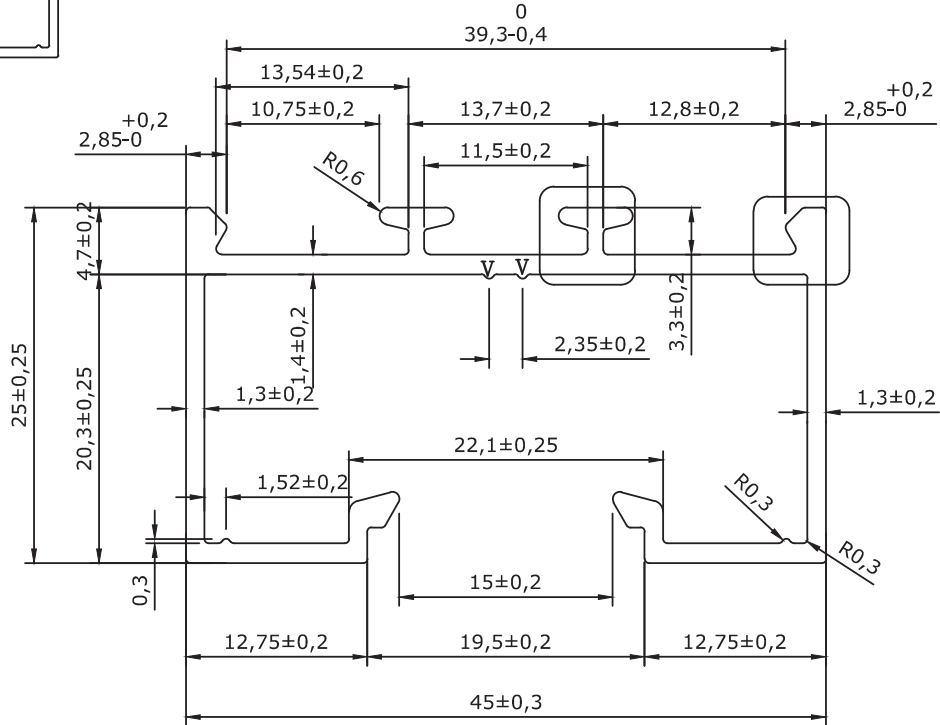



REF NO: B-21



OK  
7/2/22

CODE : SEW/STA/S1/537

REV : 00 / Dt : 28.12

UNSPECIFIED RADIUS:-0.50

NOTE:- ALL DIMENSIONS ARE IN mm.

WITH DIN ISO 2768-1 class C = Coarse

Dimension	0.5 - 3	3 - 6	6 - 30	30-120	120-400	400-1000
Longitudinal	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0	30-120 ±0.8	120-400 ±0.8	400-1000 ±2.0
Degrees & Minutes	at 10 ±1°30'	10-50 ±1°	50-120 ±0°30'	120-400 ±0°15'	over 400 ±0°10'	

AREA: 197.796 Sqmm <sup>^</sup>	ALLOY/TEMPER:-	DRAWN BY: RAJE
PERIMETER: 276.938	FLATNESS:-±0.8mm <sup>^</sup>	DATE: 06/01/2022
WEIGHT: 1.954 Kg/12'	TOLERANCES:	REVISION:-
DESCRIPTION :	ANGULARITY:	CHECKED BY:-
PARTY DRG NO:	straightness:	APPROVED BY:-
SECTION NO:	TWIST:-1.70mm/meter	SCALE:- 2:1