




REF NO: B-26



SCALE: 1:2

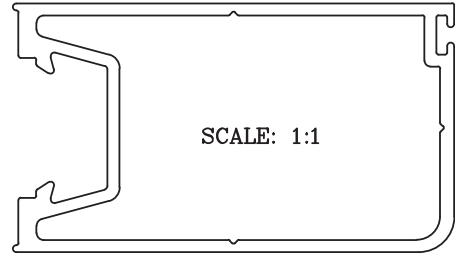

SCALE: 1:1

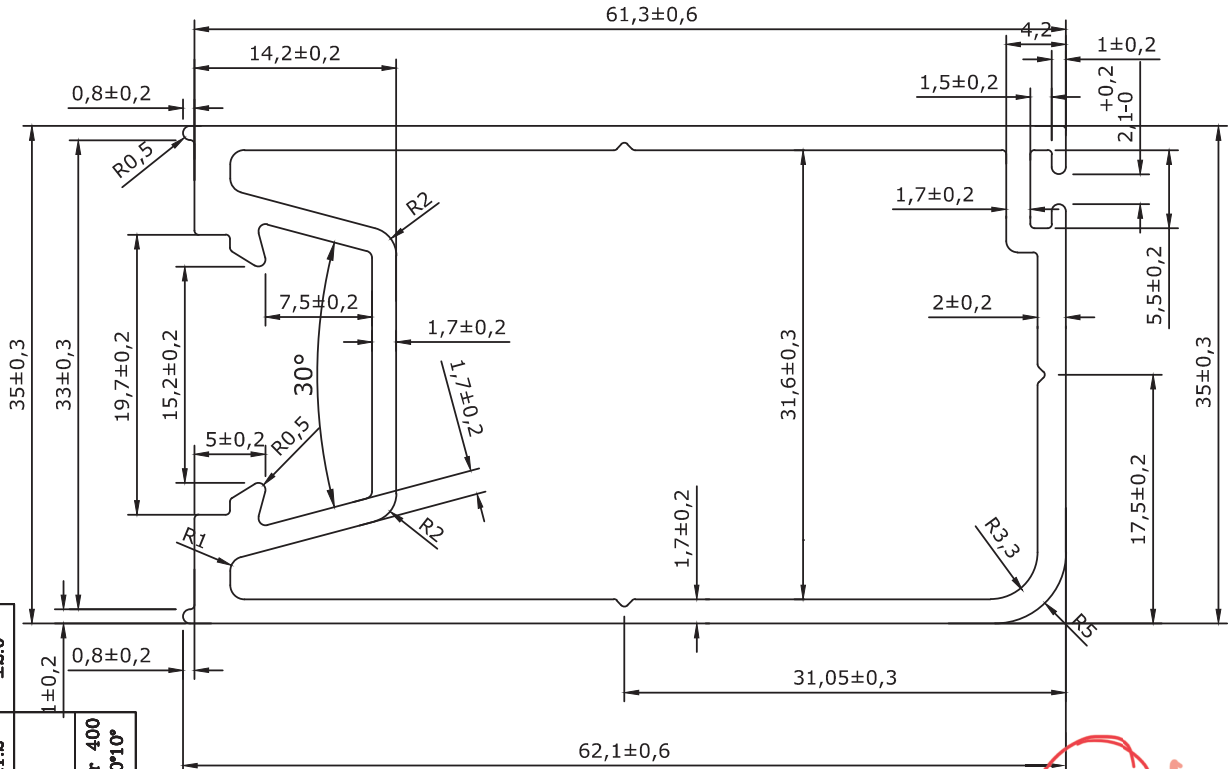

OK  
7/2/22

WITH DIN ISO 2768-1 class C = Coarse

Dimension	0.5 - 3	3 - 6	6 - 30	30 - 120	120 - 400	400 - 1000
Longitudinal	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0	30 - 120 ±0.8	120 - 400 ±0.8	400 - 1000 ±2.0
Degrees & Minutes	at 10 ±1°30'	10 - 50 ±1°	50 - 120 ±0°30'	120 - 400 ±0°15'	over 400 ±0°10'	

NOTE:- ALL DIMENSIONS ARE IN mm.

CODE : SEW/STA/S1/542

REV : 00 / Dt : 06.01

UNSPECIFIED RADIUS:-0.50

AREA: 386.536 Sqmm <sup>^</sup>	ALLOY/TEMPER:-	DRAWN BY: RAJE
PERIMETER: 234.132	FLATNESS:- ±0.8mm <sup>^</sup>	DATE: 06/01/2022
WEIGHT: 3.819 Kg/12'	TOLERANCES:	REVISION:-
DESCRIPTION :	ANGULARITY:	CHECKED BY:-
PARTY DRG NO:	straightness:	APPROVED BY:-
SECTION NO:	TWIST:-1.70mm/meter	SCALE:- 2:1