
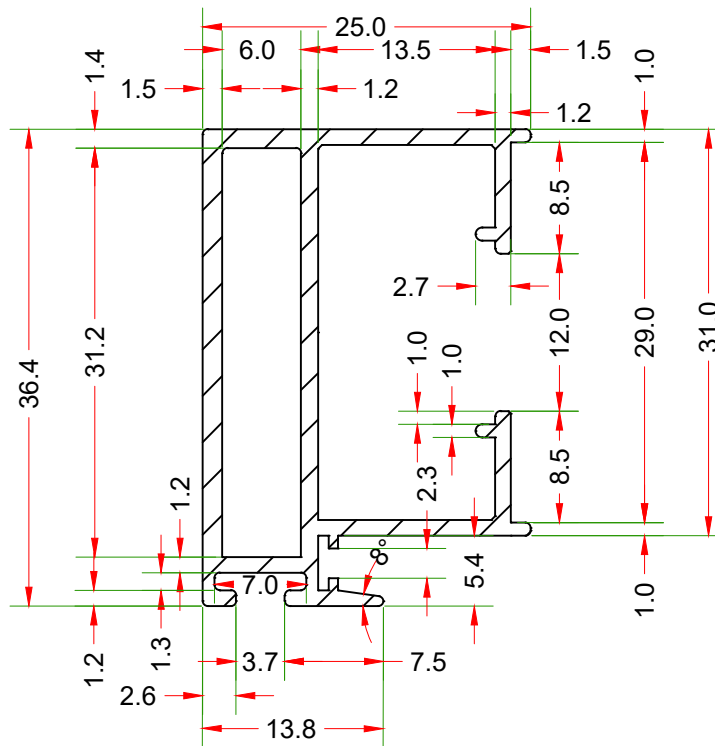


Q02561



WT.= 0.502 KG/M

NOTE:- ALL DIMENSIONS ARE IN mm.

UNSPECIFIED RADIUS:-0.50

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE WITH DIN ISO 2768-1 class C = Coarse		3 - 6 ± 0.3	6 - 30 ± 0.5	30 - 120 ± 0.8	120 - 400 ± 1.2	400-1000 ± 2.0
DIMENSION LONGITUDINAL	CHAMFER & RADIUS	0.5 - 3 ± 0.2	0.5 - 3 ± 0.4	3 - 6 ± 1.0	6 - 30 ± 2.0	30 - 120 ± 2.8
DEGREES & MINUTES		at 10 ± 1°30'	10 - 50 ± 1°	50 - 120 ± 0°30'	120-400 ± 0°15'	over 400 ± 0°10'



PADMAWATI EXTRUSION PVT LTD

AREA: 186.205 Sqmm [^]	ALLOY/TEMPER:-	DRAWN BY: OM
PERIMETER: 288.828 mm	FLATNESS:-±0.92mm [^]	DATE: 02/04/2024
WEIGHT: 0.502 Kg/mtr	TOLERANCES:	REVISION: 00
PARTY REF NO:	ANGULARITY:-±2°	CHECKED BY:
PARTY NAME:	STRAIGHTNESS:-1.70meter	APPROVED BY:-
SECTION NO: P74465	TWIST:-1.70mm/meter	SCALE: 1:1