



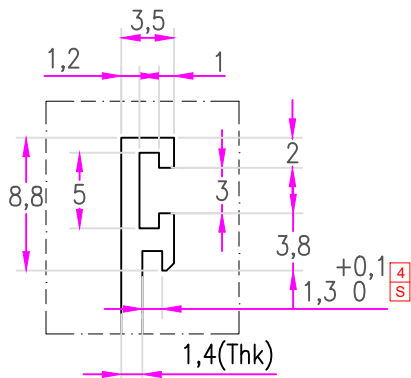


Detail of "A"
Scale 2:1

Visible Area

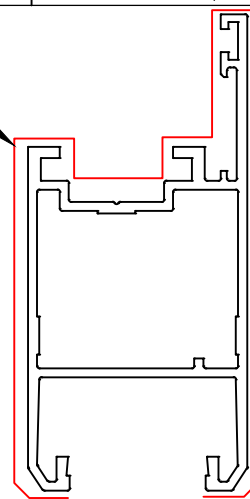

Scale 1:1

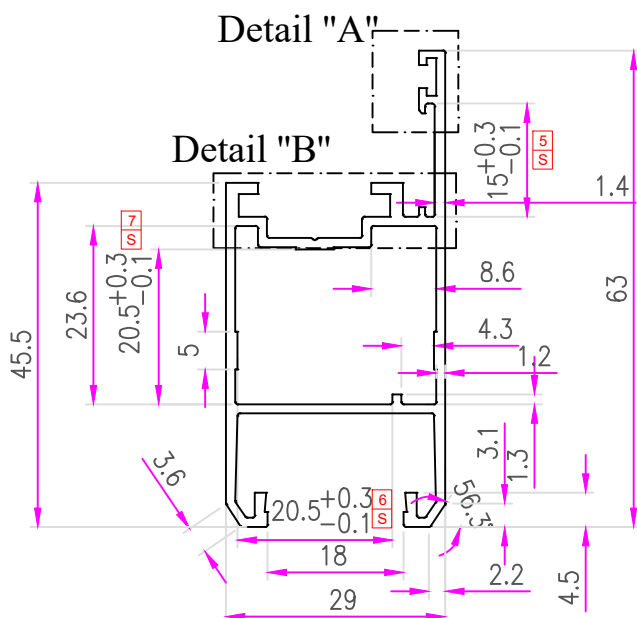

Scale 1:1

Detail of "B"
Scale 2:1

Q02618

Perimeter Outer (mm)	Weight (Kg/m)	Ixx (cm ⁴)	Iyy (cm ⁴)
288.39	0.693 Kg/m	7.6044	3.1757

Notes:-

FOR CONSULTATION

- A. Extrusion :
- Part must be clean and free from tool marks.
 - No Waviness, Pitting, Bending acceptable on part.
 - Parts must be free from internal cracks.
- B. Part must be free from powder coating defect like Pitting, Blow holes, inclusion etc.
- C. Part must be same as engineering approved sample.

REV.	Date.	Prepared by:	Approved By:	Description
All dimension are in mm.				
Unspecified general tol: EN 12020-2 : 2016				
Dimensions	From 0.5 to 10 : ± 0.15mm	From 90 to 120 : ± 0.6mm	Thickness	From 0 to 3 : ± 0.15mm
	From 10 to 15 : ± 0.20mm	From 120 to 150 : ± 0.8mm		From 3 to 6 : ± 0.2mm
	From 15 to 30 : ± 0.25mm	From 150 to 180 : ± 1 mm		From 6 to 10 : ± 0.25mm
	From 30 to 45 : ± 0.30mm	From 180 to 240 : ± 1.2 mm		From 10 to 15 : ± 0.30mm
	From 45 to 60 : ± 0.40mm	From 240 to 300 : ± 1.5 mm		From 15 to 20 : ± 0.35mm
	From 60 to 90 : ± 0.45mm	From 300 to 350 : ± 1.8 mm		
DATE 28-10-2024		OZONE OVERSEAS PRIVATE LIMITED		Sheet 1 of 1
Prepared by: Rajeev Kumar		Checked by: Ritesh Srivastava		Rev. 00

MATERIAL ALUMINIUM 6063 T6	
DENSITY 2700 kg/m ³	
UNSPECIFIED CORNER RAD. 0.5mm	
STRAIGHTNESS As per EN12020 : (±3mm, 5m<L<6m)	
ANGULARITY ± 1° (EN12020)	
FLATNESS TOL. ±0.8mm	
TWIST TOL. 1.0mm/m (EN12020)	
SIGNIFICANT CHARACTERISTICS 7	
SURFACE FINISH: Powder Coated	
FINISH PERIMETER (MM): 222.6102	
SCALE 2:1	Description:-
	OZ WD A C 29 P S 01 AL MF 29 CWS
Format A4	Drawing No :- A C 29 P S 01
CONFIDENTIAL - EXCLUSIVE PROPERTY OF OZONE OVERSEAS PVT.LTD.	