

A

B

C

D

E

F

A

B


C

D


E

F

Visible Area



Scale 1:1

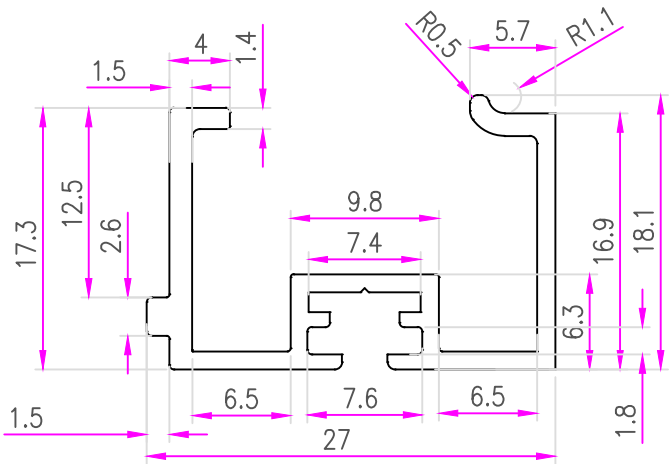

Q02620

FOR CONSULTAION

Notes:-

- A. Extrusion :
- a. Part must be clean and free from tool marks.
 - b. No Waviness, Pitting, Bending acceptable on part.
 - c. Parts must be free from internal cracks.
- B. Part must be free from powder coating defect like Pitting, Blow holes, inclusion etc.
- C. Part must be same as engineering approved sample.

Perimeter Outer (mm)	Weight (Kg/m)	Ixx (cm4)	Iyy (cm4)
167.2559	0.289 Kg/m		

MATERIAL	ALUMINIUM 6063 T6
DENSITY	2700 kg/m3
UNSPECIFIED CORNER RAD.	0.5mm
STRAIGHTNESS	As per EN12020 : (±3mm, 5m<L<6m)
ANGULARITY	± 1° (EN12020)
FLATNESS TOL.	±0.8mm
TWIST TOL.	1.0mm/m (EN12020)
SIGNIFICANT CHARACTERISTICS	-
SURFACE FINISH:	Powder Coated
FINISH PERIMETER (MM):	91.2189

SCALE 2:1	Description:- OZ WD A C 29 P S 03 AL MF 29 CDNTHS
--------------	---

Format A4	Drawing No :- A C 29 P S 03
-----------	-----------------------------

CONFIDENTIAL - EXCLUSIVE PROPERTY OF OZONE OVERSEAS PVT.LTD.

REV.	Date.	Prepared by:	Approved By:	Description
All dimension are in mm.				
Unspecified general tol: EN 12020-2 : 2016				
Dimensions	From 0.5 to 10 : ± 0.15mm	From 90 to 120 : ± 0.6mm	Thickness	From 0 to 3 : ± 0.15mm
	From 10 to 15 : ± 0.20mm	From 120 to 150 : ± 0.8mm		From 3 to 6 : ± 0.2mm
	From 15 to 30 : ± 0.25mm	From 150 to 180 : ± 1 mm		From 6 to 10 : ± 0.25mm
	From 30 to 45 : ± 0.30mm	From 180 to 240 : ± 1.2 mm		From 10 to 15 : ± 0.30mm
	From 45 to 60 : ± 0.40mm	From 240 to 300 : ± 1.5 mm		From 15 to 20 : ± 0.35mm
	From 60 to 90 : ± 0.45mm	From 300 to 350 : ± 1.8 mm		
DATE 28-10-2024		OZONE OVERSEAS PRIVATE LIMITED		Sheet 1 of 1
Prepared by: Rajeev Kumar		Checked by: Ritesh Srivastava	1st Approver: Ritesh Srivastava	2nd Approver: Vivek Gupta
				Rev. 00

1

2

3

4