
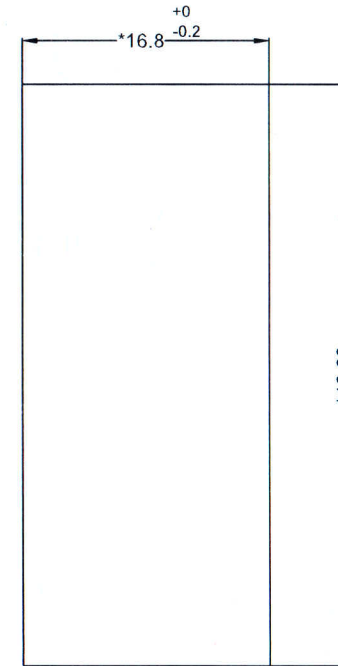


Q02772

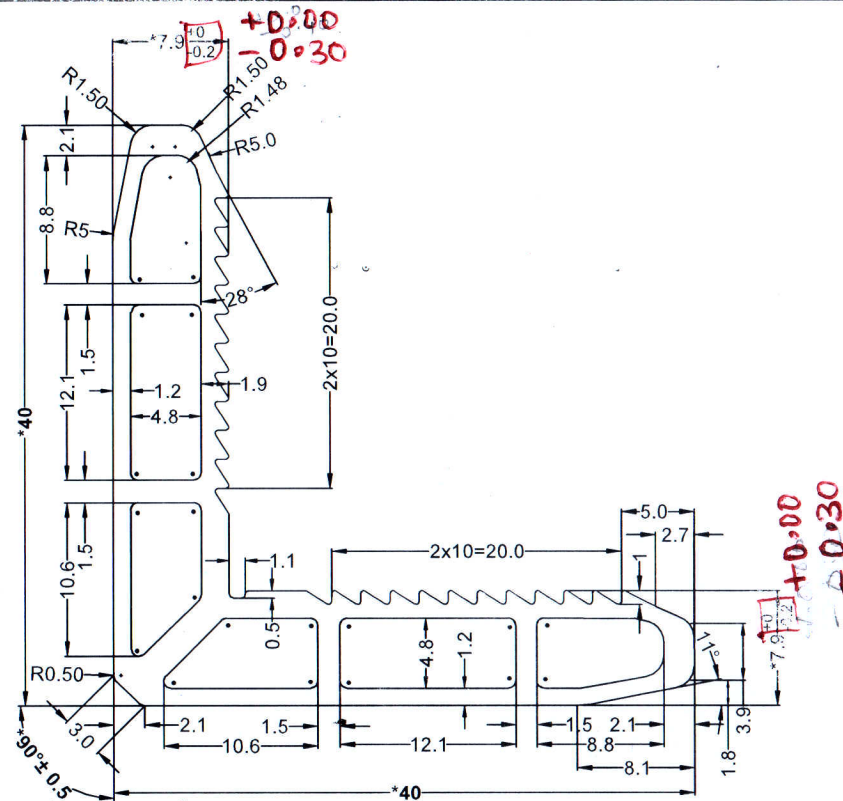

Q02772

Technical Requirements:

1. If there is no instructions, the dimensions of the frame profile without tolerance are in accordance with the national standard GB/T5237.1-2017 high-precision requirements for processing.
2. Angle Requirements: The section angle of the profile does not exceed 0.5°
3. Unmarked rounded corners are all R0.3
4. "±" = R0.5 mm
5. Hardness ≥ 10 HW
7. Area : 240.26 mm², Theoretical Weight per meter : 0.682 kg/m, Theoretical Aluminum Density : 2710 kg/m³
8. Unspecified dimension tolerance ±0.2mm, Unspec thickness : ±0.10mm
9. High strength alloy **6005 T5** materials require tensile strength $R_m \geq 260$ MPa, Yield strength $R_p 0.2 \geq 240$ MPa, Elongation $\geq 8\%$
10. " * " are Critical dimensions.

Each supplier's Specifications approved by Authorized Technical Team of RAsaVI will be superseded.

00		New Release	004	23-06-23	CTP
Rev	Mark	Description of change	DCI	Date	Sign

Prepared By : Pratham B.		Checked By : M.R. Savaliya		Approved By : M.R. Savaliya	
		Undimensioned edges acc. to DIN ISO 11715		Scale: 1 : 1	
		Material: Aluminum L-Key		Mass:	
RAsaVI ImpEX Plot no. C-10, Road no. 7, Hojwala Industrial Estate, GIDC Sachin, Surat - 394230 www.rasaviimpex.in		All units in SI unit - Dimensions in mm Dimensional variation acc. to DIN ISO 2768-1		Description: L-Key with hollow section -6F	
Name: _____ Date: _____ Drawn: Pratham B Date: 16-01-24 Valid For: Glass to Glass Module		Drawing No. RAS01AF-G-15-00		Sheet No. 1 of 1	
Copyright as per ISO 16016		Ref. Draw No.		A3	