




REVERSION NO.	REVISE MARK	REVISE DATE	APPROVED	DWG NO. TY-464

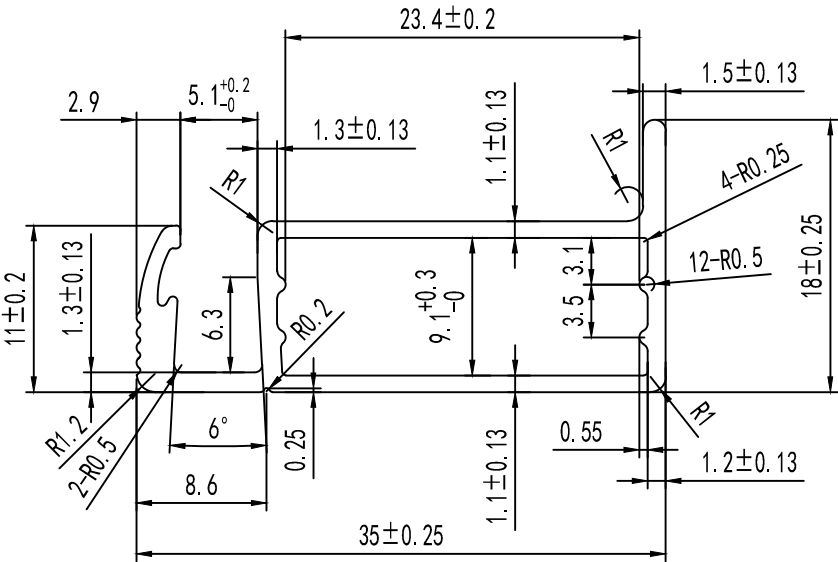

Q02888

1 : 1

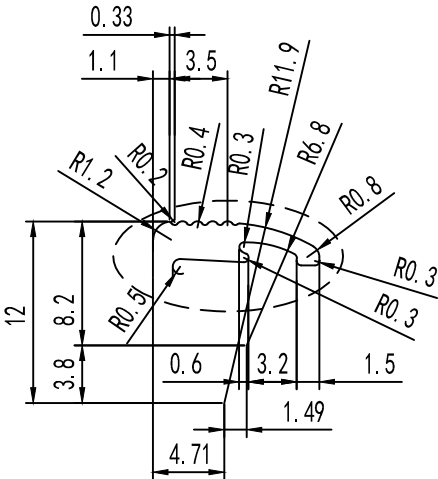

Technical Requirements:

- 1.Except special request, all the dimensions w/o unspecified tolerance are processed based on the high-precision requirements of national standard GB/T5237.1-2017;
- 2.Angle requirements: The profile section angle does not exceed 0.5° ;
- 3.Unspecified radius: R=0.5 ;
- 4.Surface treatment: sandblast oxidation, silver, film thickness: AA15um, Webster hardness≥14;
- 5.Appearance requirements: as specified by profile acceptance standard;
- 6.Bending and twisting meet the requirements of the processing drawing;
- 7.T=1.3±0.13mm

SPECIFICATION	UNSPECIFIED TOLERANCE
≤3.0	±0.13
>3.00-10.00	±0.15
>10.00-15.00	±0.17
>15.00-30.00	±0.21
>30.00-45.00	±0.26
>45.00-60.00	±0.31
>60.00-100.00	±0.52
0	

CUST. NO.	SST1								
CUSTOMER	SST RENEWABLES INDIA PVT LTD								
MATERIAL	Alloy 6005-T6	PROFILE TYPE		UNSPECIFIED TOLERANCE	T=	CIRCUMD	39.35	DESIGNED	
S (mm ²)	120.8978	PROFILE NAME		UNSPECIFIED RADI	R=	MODEL DIMENSION		DRAWN	
C (mm)	124.9807	MARK OF DECORATIVE SIDE	— — — —	SCALE	2:1	SURFACE TREAMEN	SANDBLAST OXIDATION	CHECKDE	
WT RANGE (Kg/m)	0.3276	STANDARD GB/T 5237-2017				DATE	2024.04.12	APPROVED	