


Expected price
Scrap + 45%

QW5000601202502

SCALE: 1:2

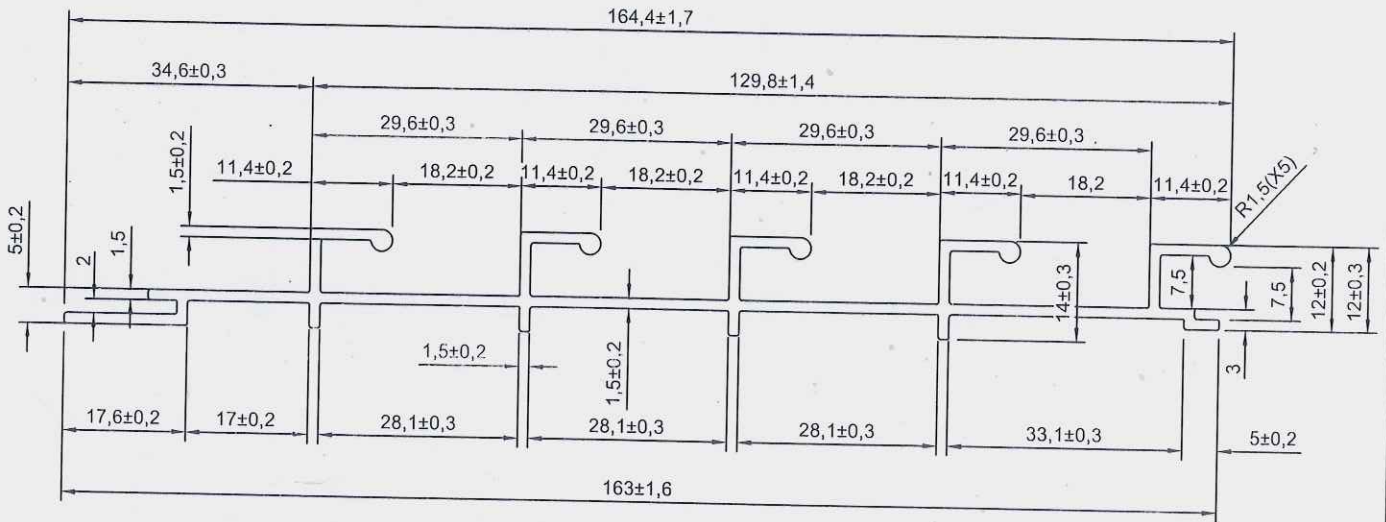

164.4 x 12 x 1.5

Q03127

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE
WITH DIN ISO 2768-1 class C = Coarse

Dimension	0.5 - 3	3 - 6	6 - 30	30 - 120	120 - 400	400 - 1000
Longitudinal	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0	30 - 120 ±0.8		
Degrees & Minutes	at 10 ±1°30'	10 - 50 ±1°	50 - 120 ±0°30'	120 - 400 ±0°15'	over 400 ±0°10'	

NOTE:- ALL DIMENSIONS ARE IN mm.

CODE : SEW/AEP/S1/054

REV : 00 / Dt : 17.02

UNSPECIFIED RADIUS:-0.30

ALUMOZ EXTRUSION PVT LTD

AREA: 436.346 Sqmm[^]

ALLOY/TEMPER:- 6063 T6

DRAWN BY: SANDEEP

EX PERIMETER: 562.579

FLATNESS:-±0.8mm[^]

DATE: 17/02/2022

WEIGHT: 4.311 Kg/12'

TOLERANCES:

REVISION:-

TYPE: SOLID

ANGULARITY:-±2°

CHECKED BY:-

PARTY DRG NO:

straightness:-1.70mm



APPROVED BY:-

SECTION NO: 20151

TWIST:-1.70mm/meter

SCALE: 1:1

D:/SUDHEER ENGG/2022/NS-15/JANUARY/SU-SE-01-/HYDERABAD

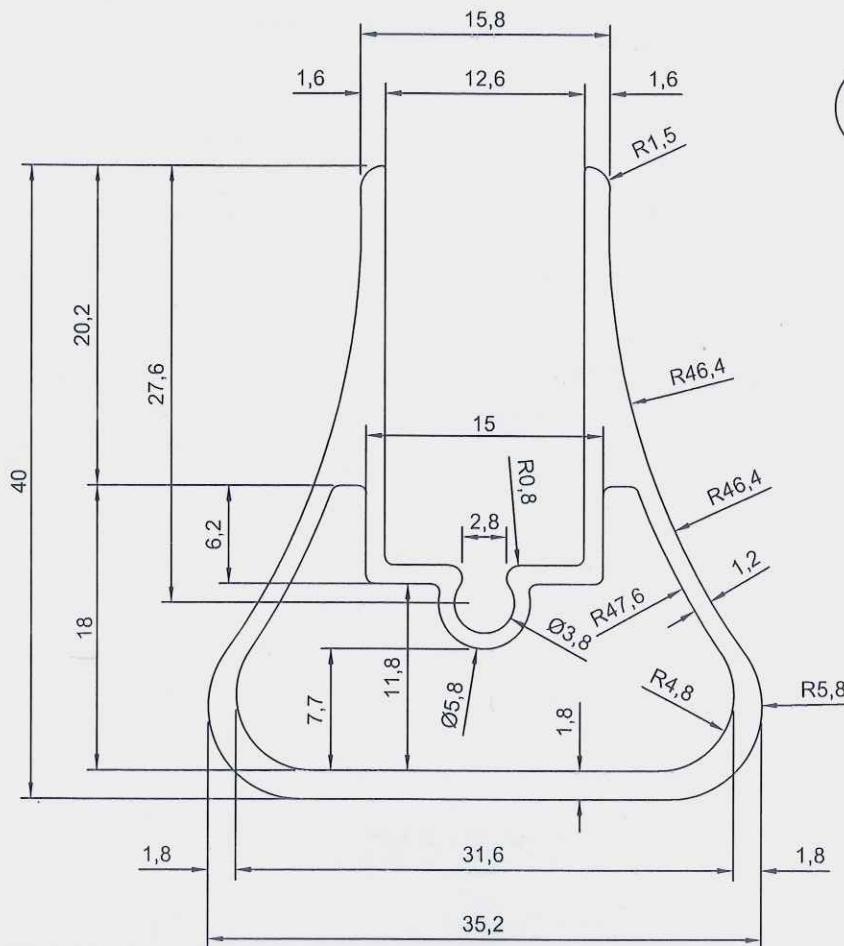

SCALE: 1:1

40X35.2X1.2

Q03128

CODE : SEW/STA/S1/1276

REV : 00 / Dt : 27.06

UNSPECIFIED RADIUS:-0.30

NOTE:- ALL DIMENSIONS ARE IN mm.


VINAY SHREE METAL INDUSTRIES

AREA: 243.851 Sqmm [^]	ALLOY/TEMPER:- 6063 T6	DRAWN BY: RAJE
EX PERIMETER: 186.063 mm	FLATNESS:-±0.8mm [^]	DATE: 27/06/2023
WEIGHT: 2.409 Kg/12'	TOLERANCES:	REVISION:-
TYPE: HOLLOW	ANGULARITY:-±2°	CHECKED BY:-
PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
SECTION NO:	TWIST:-1.70mm/meter	SCALE: 2:1

D:/SUDHEER ENGG/2023/NS-52/JUNE/SU-SE-01/-HYDERABAD

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE WITH DIN ISO 2768-1 class C = Coarse			
Dimension	0.5 - 3	3 - 6	6 - 30
Longitudinal	±0.2	±0.3	±0.5
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0
Degrees & Minutes	at 10 ±1°30'	10-50 ±1°	50-120 ±0°30'
			120-400 ±0°15'
			over 400 ±0°10'

SCALE: 1:1

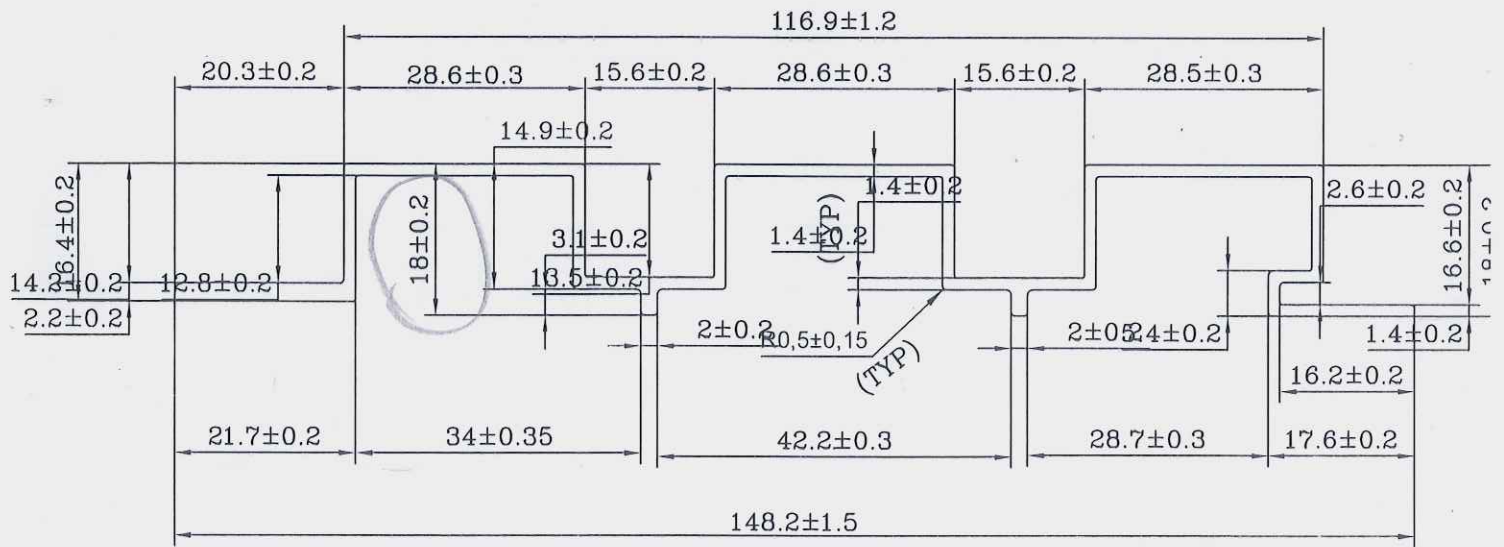

148.2 x 18 x 1.4
Q03129

WITH DIN ISO 2768-1 class C = Coarse

Dimension	0.5 - 3	3 - 6	6 - 30	30 - 120	120 - 400	400 - 1000
Longitudinal	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0	30 - 120 ±0.8	120 - 400 ±1.2	400 - 1000 ±2.0
Degrees & Minutes	at 10 ±1°30'	10 - 50 ±1°	50 - 120 ±0°30'	120 - 400 ±0°15'	over 400 ±0°10'	

NOTE:- ALL DIMENSIONS ARE IN mm.


CODE : SEW/AEP/S1/491

REV : 00 / Dt : 25.02

UNSPECIFIED RADIUS:-0.3

ALUMOZ EXTRUSION PVT LT]

AREA: 370.236 Sqmm [^]	ALLOY/TEMPER:- 6063 T6	DRAWN BY: RAJE
EX PERIMETER: 497.076	FLATNESS:- ±0.8mm [^]	DATE: 25/02/2023
WEIGHT: 3.658 Kg/12'	TOLERANCES:	REVISION:-
TYPE: HOLLOW	ANGULARITY:- ±2°	CHECKED BY:-
PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
SECTION NO: 20591	TWIST:-1.70mm/meter	SCALE: 1:1

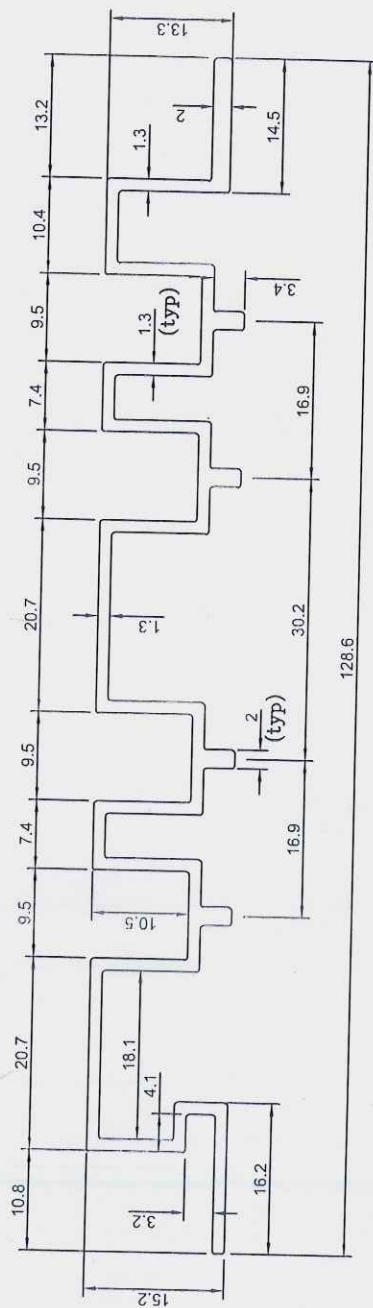
$$128.6 \times 15.2 \times 1.3$$

003/30

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE WITH DIN ISO 2768-1 class C = Coarse			
Dimension	0.5 - 3	3 - 6	6 - 30
Longitudinal	±0.2	±0.3	±0.5
Chamber & radius	0.5 - 3	3 - 6	6 - 30
	±0.4	±1.0	±2.0
Degrees & Minutes	at 10	10-50	50-120
	±1'30"	±1'	±0'30"
			120-400
			±0'15"
			over 400
			±0'10"

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE WITH DIN ISO 2768-1 class C = Coarse

NOTE:— ALL DIMENSIONS ARE IN mm.

CODE : SEW/AEP/S1/548

REV : 00 / Dt : 11.05

UNSPECIFIED RADIUS:-0.30

ALUMOZ EXTRUSION PVT LTD

AREA: 357.072 Sqmm	ALLOY/TEMPER:- 6063 T6	DRAWN BY: VISHAL
--------------------	------------------------	------------------

EX PERIMETER: 514.959 mm	FLATNESS: $\pm 0.8\text{mm}$	DATE: 11/05/2023
--------------------------	------------------------------	------------------

WEIGHT: 3.528 Kg/12'	TOLERANCES:	REVISION: -
----------------------	-------------	-------------

TYPE: SOLID	ANGULARITY: $\pm 2^\circ$	CHECKED BY: -
-------------	---------------------------	---------------

PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
---------------	----------------------	---------------


SECTION NO: 20648	TWIST:-1.70mm/meter	SCALE: 1.5:1
-------------------	---------------------	--------------

D:/SUDHEER ENGG/2023/NS-15/MARCH/SU-SE-01--HYDERABAD

PLEASE CHECK ALL THE DIMENSIONS
BECAUSE SAMPLE IS BEND



SCALE: 1:2

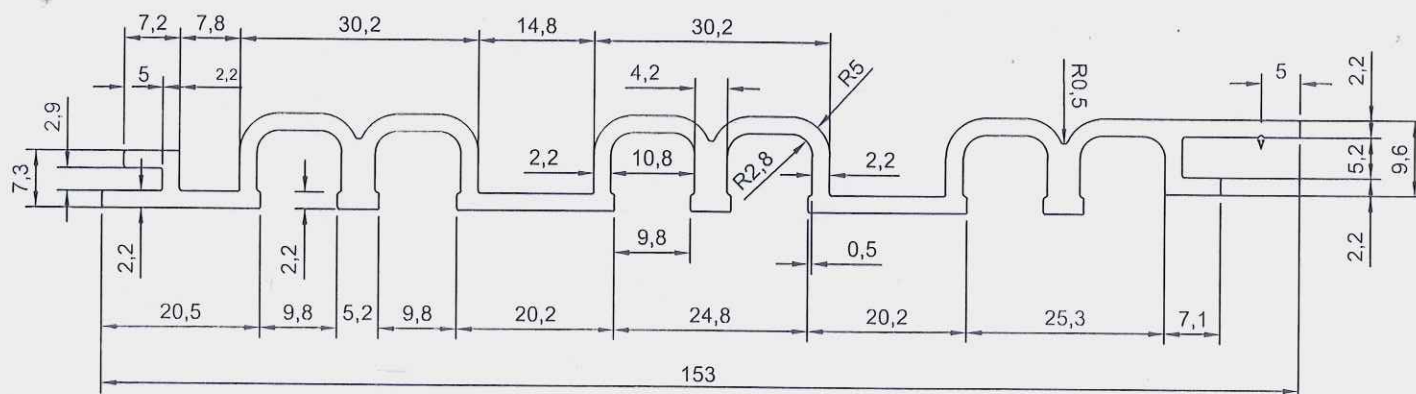

153 X 9.6 X 2.2

Q03131

V = 0.3X90°

CODE : SEW/AEP/S1/114
REV : 00 / Dt : 29.03

NOTE:- ALL DIMENSIONS ARE IN mm.

UNSPECIFIED RADIUS:-0.30


ALUMOZ EXTRUSION PVT LTD

AREA: 596.052 Sqmm [^]	ALLOY/TEMPER:- 6063 T6	DRAWN BY: SANDEEP
EX PERIMETER: 502.173	FLATNESS:-±0.8mm [^]	DATE: 29/03/2022
WEIGHT: 5.890 Kg/12'	TOLERANCES:	REVISION:-
TYPE: SOLID	ANGULARITY:-±2°	CHECKED BY:-
PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
SECTION NO: 20214	TWIST:-1.70mm/meter	SCALE: 1:1

D:/SUDHEER ENGG/2022/NS-15/JANUARY/SU-SE-01-/HYDERABAD

SCALE: 1:2

SCALE: 1:1

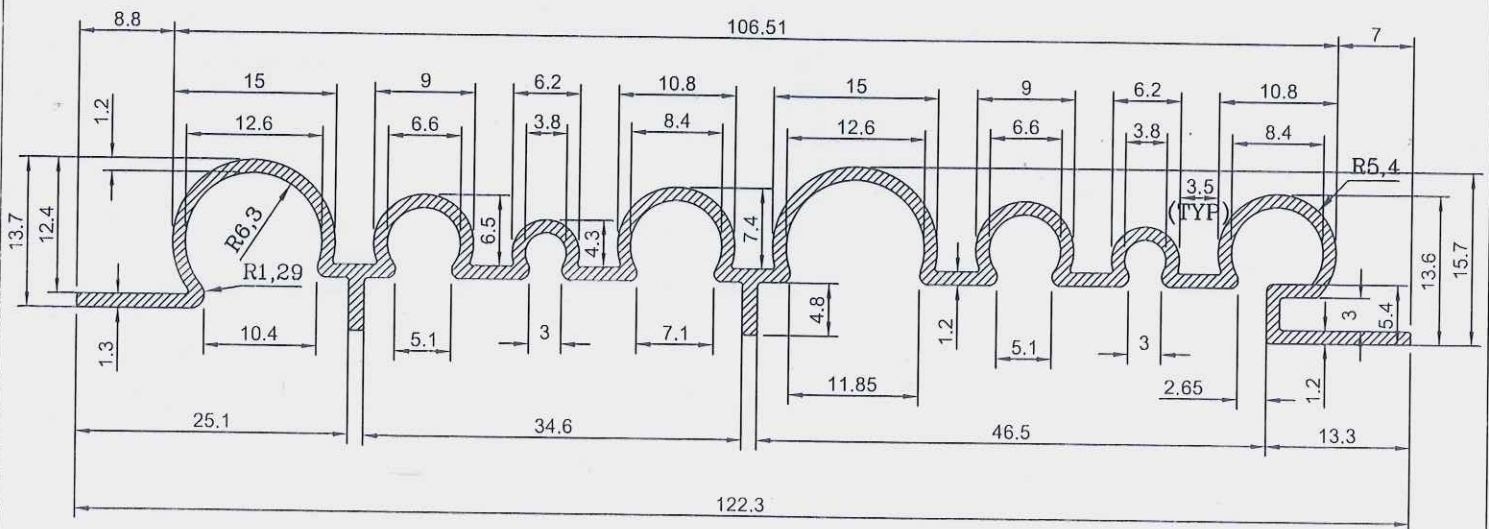

122.3 X 15.7 X 1.3

Q03133

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE

WITH DIN ISO 2768-1 class C = Coarse

Dimension	0.5 - 3	3 - 6	6 - 30	30 - 120	120 - 400	400 - 1000
Longitudinal	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0	30 - 120 ±0.8	120 - 400 ±0.15°	over 400 ±0.10°
Degrees & Minutes	at 10 ±1°30'	10 - 50 ±1°	50 - 120 ±0°30'	120 - 400 ±0°15°	over 400 ±0°10°	

NOTE:- ALL DIMENSIONS ARE IN mm.



CODE : SEW/AEP/S1/540
REV : 00 / Dt : 11.04

UNSPECIFIED RADIUS:-0.30

ALUMOZ EXTRUSION PVT LTD

AREA: 288.455 Sqmm [^]	ALLOY/TEMPER:- 6063 T6	DRAWN BY:-SANTHOSH
EX PERIMETER: 466.816 mm	FLATNESS:-±0.8mm [^]	DATE: 11/04/2023
WEIGHT: 2.850 Kg/12'	TOLERANCES:	REVISION:-
TYPE: HOLLOW	ANGULARITY:-±2°	CHECKED BY:-
PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
SECTION NO: 20640	TWIST:-1.70mm/meter	SCALE: 1.5:1

D:/SUDHEER ENGG/2023/NS-15/APRIL/SU-SE-01-/HYDERABAD

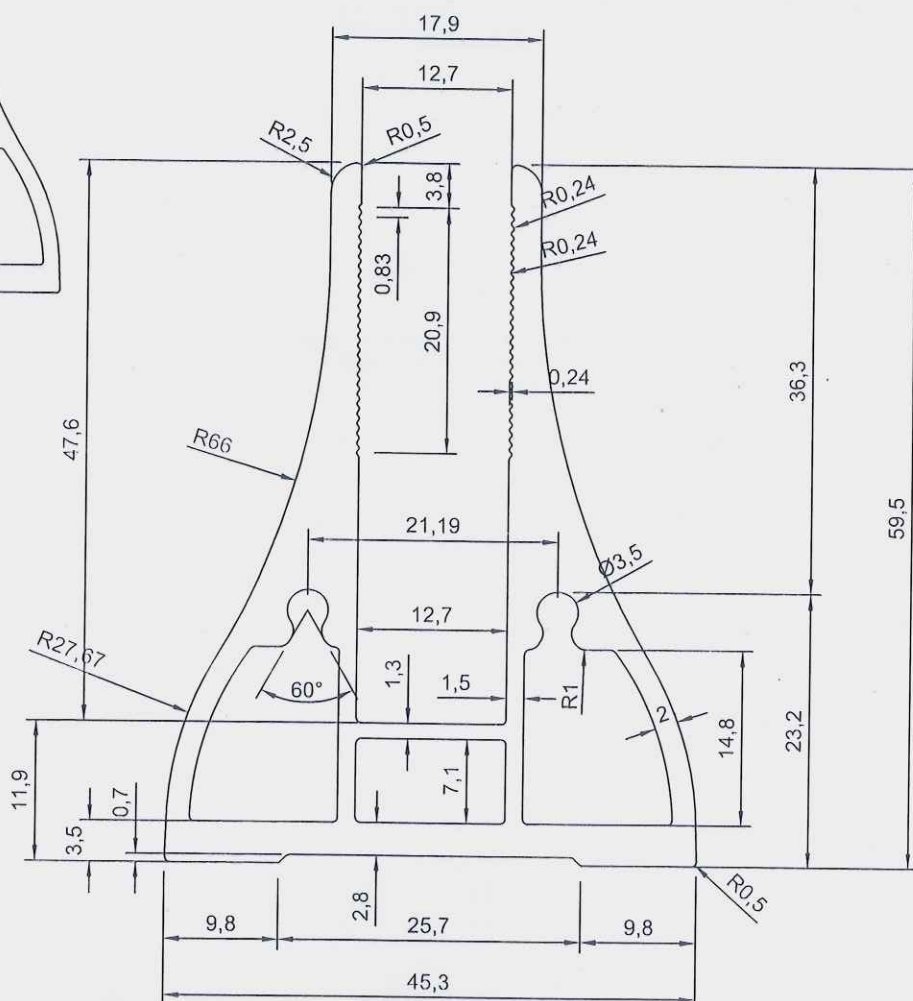

Q03134

REV : 00 / Dt : 27.06


UNSPECIFIED RADIUS: -0.30

NOTE:- ALL DIMENSIONS ARE IN mm.

VINAY SHREE METAL INDUSTRIES

AREA: 634.744 Sqmm [^]	ALLOY/TEMPER:- 6063 T6	DRAWN BY: VISHAL
EX PERIMETER: 288.746 mm	FLATNESS:- $\pm 0.8\text{mm}^{\wedge}$	DATE: 27/06/2023
WEIGHT: 6.272 Kg/12'	TOLERANCES:	REVISION:-
TYPE: HOLLOW	ANGULARITY:- $\pm 2^{\circ}$	CHECKED BY:-
PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
SECTION NO:	TWIST:-1.70mm/meter	SCALE: 1.5:1

D:/SUDHEER ENGG/2023/NS-52/JUNE/SU-SE-01/-HYDERABAD

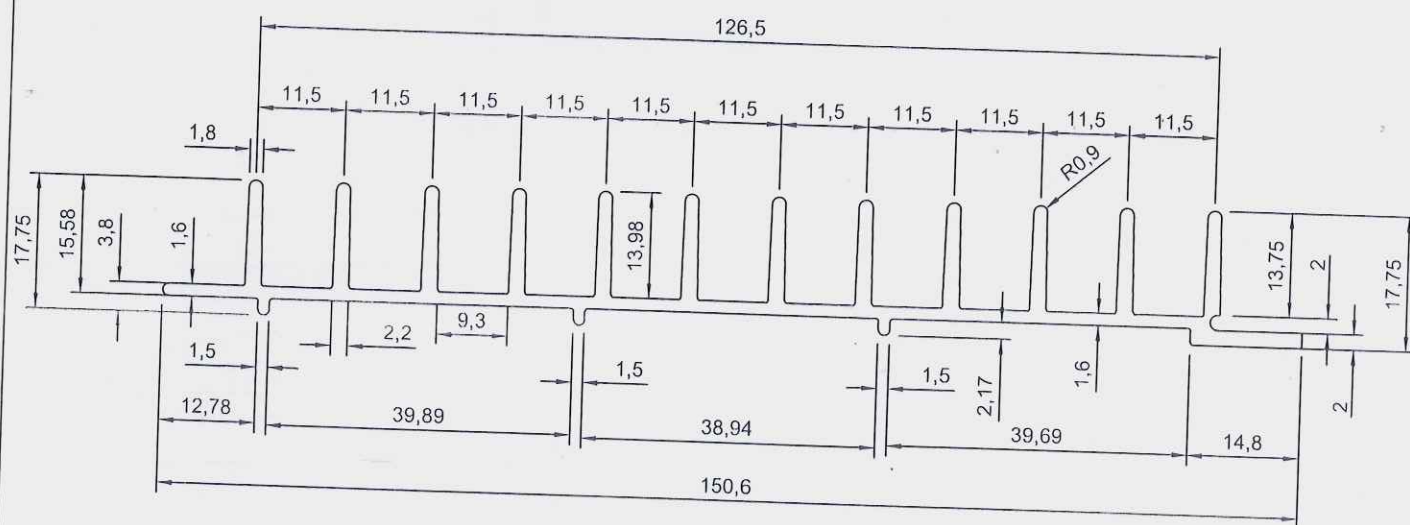

Q03135

UNSPECIFIED TOLERANCES WILL BE IN ACCORDANCE WITH DIN ISO 2768-1 class C = Coarse						
Dimension	0.5 - 3	3 - 6	6 - 30	30-120	120-400	400-1000
Longitudinal	±0.2	±0.3	±0.5	±0.8	±1.2	±2.0
chamfer & radius	0.5 - 3 ±0.4	3 - 6 ±1.0	6 - 30 ±2.0	30-120 ±0.8		
Degrees & Minutes	at 10 ±1°30'	10-50 ±1°	50-120 0°30'	120-400 ±0°15'	over 400 ±0°10'	

NOTE:- ALL DIMENSIONS ARE IN mm.

CODE : SEW/AEP/S1/405
REV : 00 / Dt : 14.09

UNSPECIFIED RADIUS:-0.30

ALUMOZ EXTRUSION PVT LTD

AREA: 590.265 Sqmm [^]	ALLOY/TEMPER:- 6063 T6	DRAWN BY: RAJE
EX PERIMETER: 636.815 mm	FLATNESS:- $\pm 0.8\text{mm}^{\wedge}$	DATE: 14/09/2022
WEIGHT: 5.832 Kg/12'	TOLERANCES:	REVISION:-
TYPE: SOLID	ANGULARITY:- $\pm 2^{\circ}$	CHECKED BY:-
PARTY DRG NO:	straightness:-1.70mm	APPROVED BY:-
SECTION NO: 20505	TWIST:-1.70mm/meter	SCALE: 1:1

D:/SUDHEER ENGG/2022/NS-15/SEPT/SU-SE-01-/HYDERABAD