



P-JAL-B-984-1

Q03206

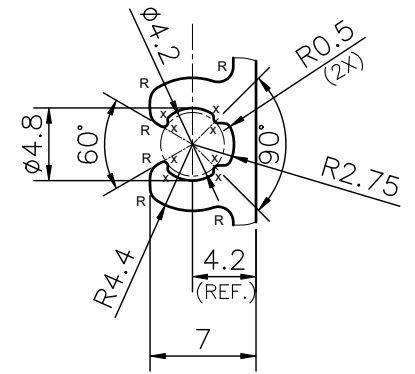

DETAIL A
SCALE 2:1

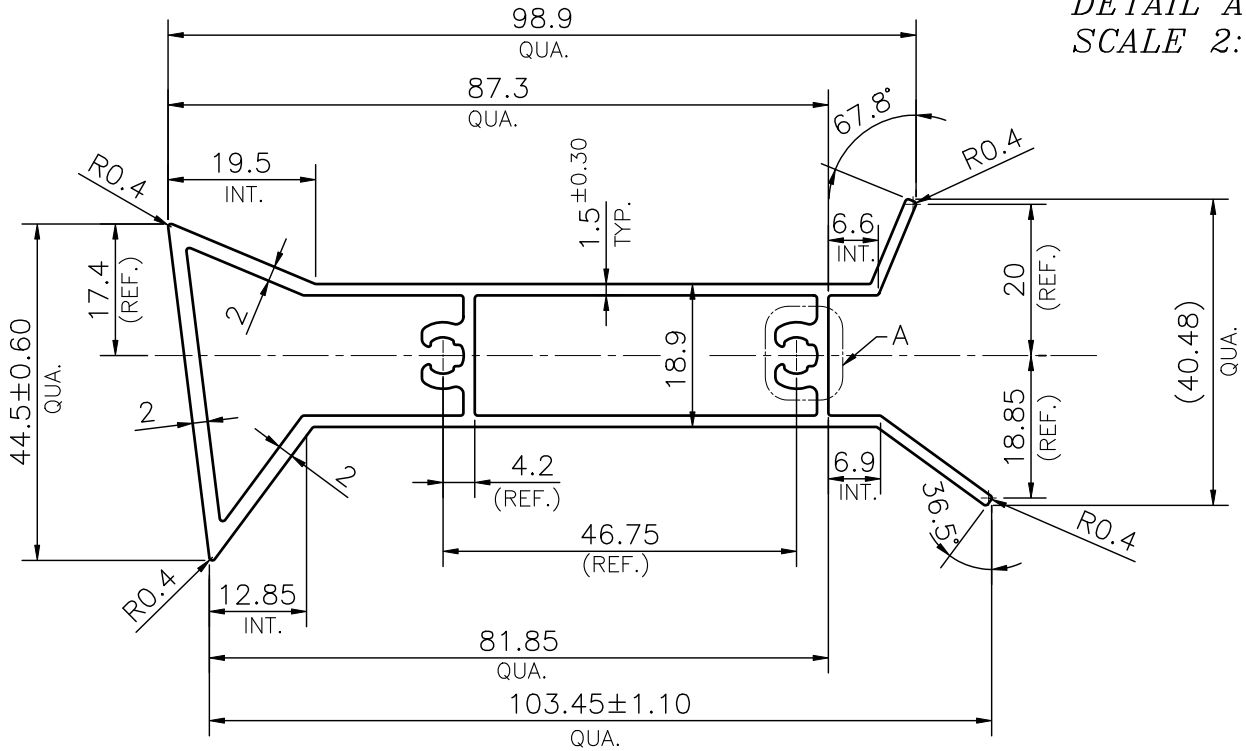

☞ PLEASE CHECK ALL DIMENSIONS PROPERLY, AS
CAD DRAWING PROVIDED BY CUSTOMER IS UNSYMMETRICAL

NOTE:-

x= 0.30 RADIUS (16 PLACES)

R= 1.0 RADIUS (12 PLACES)

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= $\pm 2^\circ$
4. FLATNESS= 0.007xWIDTH

QXXXXX

UNCONTROLLED COPY

1) THE WELDING LINE IN THE EXPOSED SURFACE OF PROFILE IS UNAVOIDABLE. 2) PLEASE SPECIFY IMPORTANT SIZES. 3) PLEASE SPECIFY IF THIS PROFILE MATCHES WITH OTHER PROFILES. 4) PLEASE SPECIFY EXPOSED SURFACE. OTHER WISE CONSIDERED AS NO EXPOSED SURFACE. 5) FINISH :- ☐ MILL FINISH / ☐ ANODIZING / ☐ POWDER COATING



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

	NAME	DATE
DRAWN	ASHUTOSH	12-03-2025
CHECKED		
APPROVED		
SCALE	1:1	
AREA mm ²	533.435	
PERIMETER mm.	329.135	
WEIGHT kg/m	1.44	
DRAWING No.	SECTION No.	
P-JAL-B-984-1	-	
-	-	

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9, UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	AXSYS SOLUTION	
PARTY'S DRAWING No.	AS PER CAD DRAWING (90° CORNER BULLET PROOF GLASS PROFILE)	
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-055 HSN CODE:- 76042100
DESCRIPTION	CURTAIN WALL SECTION	