


P-17463


12303

R1X4

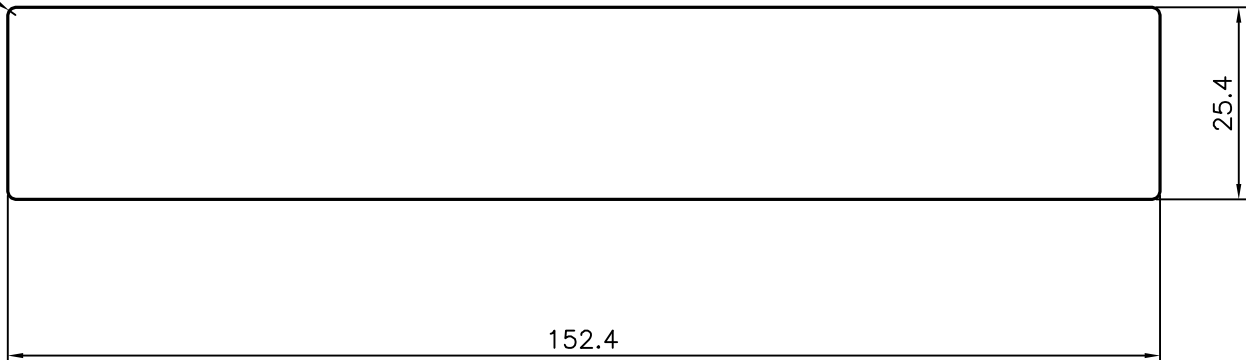

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

CD ≤ 100	100 < CD ≤ 200	200 < CD < 300	300 < CD < 500
UPTO 10mm - ±0.25	±0.30	±0.35	±0.40
10.0 - 25.0 - ±0.30	±0.40	±0.50	±0.60
25.0 - 50.0 - ±0.50	±0.60	±0.80	±0.90
50.0 - 100.0 - ±0.70	±0.90	±1.10	±1.30
100 - 150 - -	±1.10	±1.30	±1.50
150 - 200 - -	±1.3	±1.50	±1.80
200 - 300 - -	-	±1.70	±2.10
300 - 450 - -	-	-	±2.80

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> <b>BANGALORE-560073 (INDIA)</b>	DRAWN	J.P.KAUSHIK	20-09-2017	
		CHECKED			
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED		APPROVED	<b>B.NATARAJA</b>	22-09-2017	
		SCALE		1:1	
PARTY'S NAME		P&P NON FERROURS, UNITED KINGDOM		AREA mm <sup>2</sup>	3870.102
		AS PER SPECIFICATION		PERIMETER mm.	353.883
ALLOY & TEMPER		6082 T6		WEIGHT kg/m	10.449
		DESCRIPTION		FLAT BAR WITH CORNER RADIUS 1.0 mm	
		DRAWING No.	P-17463	SECTION No.	-
			12303		12303