


P-17366

16505

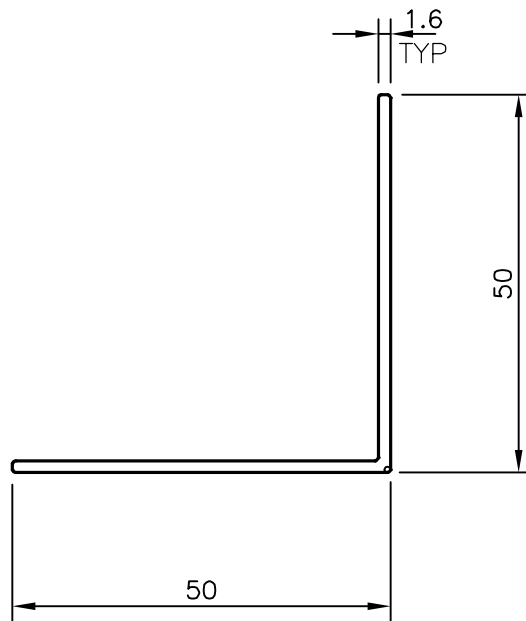

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

CD ≤ 100	100 < CD ≤ 200	200 < CD < 300	300 < CD < 500
UPTO 10mm - ±0.25	±0.30	±0.35	±0.40
10.0 - 25.0 - ±0.30	±0.40	±0.50	±0.60
25.0 - 50.0 - ±0.50	±0.60	±0.80	±0.90
50.0 - 100.0 - ±0.70	±0.90	±1.10	±1.30
100 - 150 - -	±1.10	±1.30	±1.50
150 - 200 - -	±1.3	±1.50	±1.80
200 - 300 - -	-	±1.70	±2.10
300 - 450 - -	-	-	±2.80



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER BS:EN-755-9 UNLESS OTHERWISE SPECIFIED

		NAME	DATE
PARTY'S NAME		ULLRICH ALUMINIUM PTY LTD., AUSTRALIA	J.P.KAUSHIK 27-07-2017
PARTY'S DRAWING No.		2UA1100 ISSUE-C	CHECKED
ALLOY & TEMPER		6060 T5	APPROVED B.NATARAJA 14-08-2017
DESCRIPTION		EQUAL ANGLE	SCALE 1:1
			AREA mm ² 157.303
			PERIMETER mm. 198.97
			WEIGHT kg/m 0.425
		DRAWING No.	SECTION No.
		P-17366	-
		16505	16505