


P-14786

S4502


17740

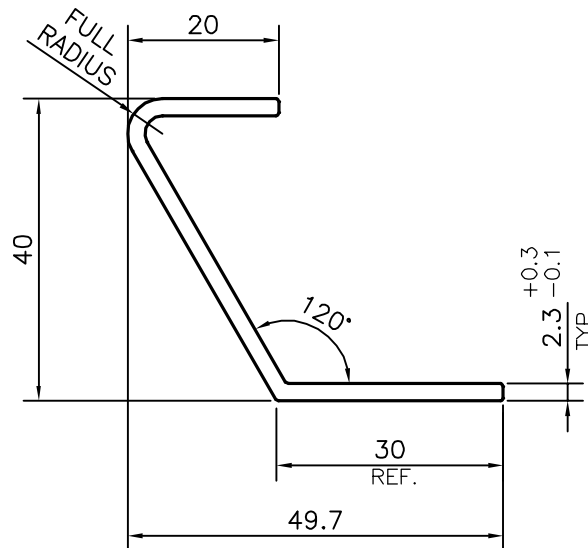


**TOLERANCE ADDED ON THICKNESS 2.3<sup>+0.3</sup><sub>-0.1</sub> mm.**  
**AS PER CUSTOMER REQUIREMENT.**  
**ON DATED 10-07-2015.**

**TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS**

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.007xWIDTH
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> <b>BANGALORE-560073 (INDIA)</b>	NAME	DATE
		DRAWN	PARVESH
		CHECKED	
		APPROVED	S.S.GARG
			24-06-2015
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED		SCALE	1:1
		AREA mm <sup>2</sup>	205.702
		PERIMETER mm.	182.818
		WEIGHT kg/m	0.555
PARTY'S NAME	SHRI VINAYAGA ENGINEERING WORKS, KANCHIPURAM	DRAWING No.	SECTION No.
PARTY'S DRAWING No.	AS PER DRAWING	P-14786	-
ALLOY & TEMPER	6063 T6	S4502	S4502
DESCRIPTION	MISC. SECTION	17740	17740