
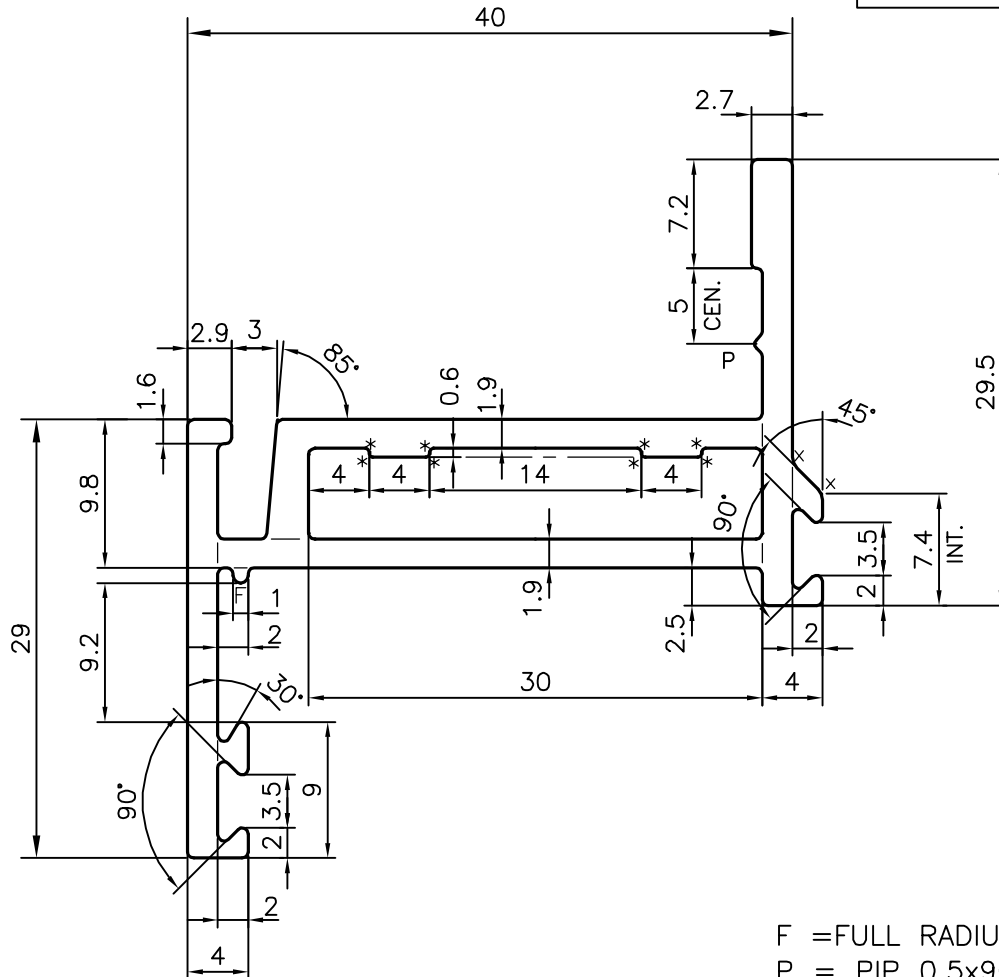


P-12966

S3826

21693

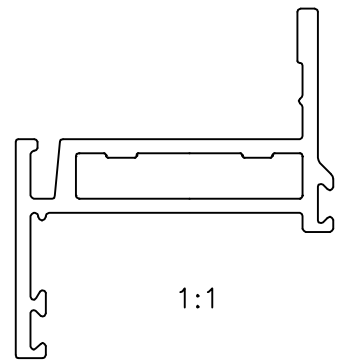

F = FULL RADIUS

P = PIP 0.5x90°

* = 0.25 RADIUS (8 PLACES)

x = 1.0 RADIUS (2 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

| | | | |
|---------------------|----------------------|----------------------|-----------------------|
| UPTO 6.40mm - ±0.20 | UPTO 32.0mm - ±0.38 | UPTO 120.0mm - ±0.85 | UPTO 320.00mm - ±1.70 |
| UPTO 10.0mm - ±0.23 | UPTO 50.0mm - ±0.46 | UPTO 160.0mm - ±1.02 | |
| UPTO 12.0mm - ±0.25 | UPTO 60.0mm - ±0.53 | UPTO 200.0mm - ±1.14 | |
| UPTO 16.0mm - ±0.28 | UPTO 80.0mm - ±0.69 | UPTO 250.0mm - ±1.40 | |
| UPTO 25.0mm - ±0.30 | UPTO 100.0mm - ±0.75 | UPTO 300.0mm - ±1.65 | |



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

| | NAME | DATE |
|----------|-------------|------------|
| DRAWN | J.P.KAUSHIK | 16-08-2013 |
| CHECKED | | |
| APPROVED | S.S.GARG | 17-08-2013 |

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED

| | |
|----------------------|---------|
| SCALE | 2:1 |
| AREA mm ² | 290.424 |
| PERIMETER mm. | 214.104 |
| WEIGHT kg/m | 0.784 |

| | | | | | |
|---------------------|---|-------------|---------|-------------|-------|
| PARTY'S NAME | INDERJIT MEHTA CONSTRUCTIONS PVT. LTD., NILGIRIS | DRAWING No. | P-12966 | SECTION No. | - |
| PARTY'S DRAWING No. | AS PER DRAWING(OUR SECTION 20899) | | S3826 | | S3826 |
| ALLOY & TEMPER | HE9 WP | | 21693 | | 21693 |
| DESCRIPTION | WINDOW SECTION | | | | |