


P-16725
S5272
21869

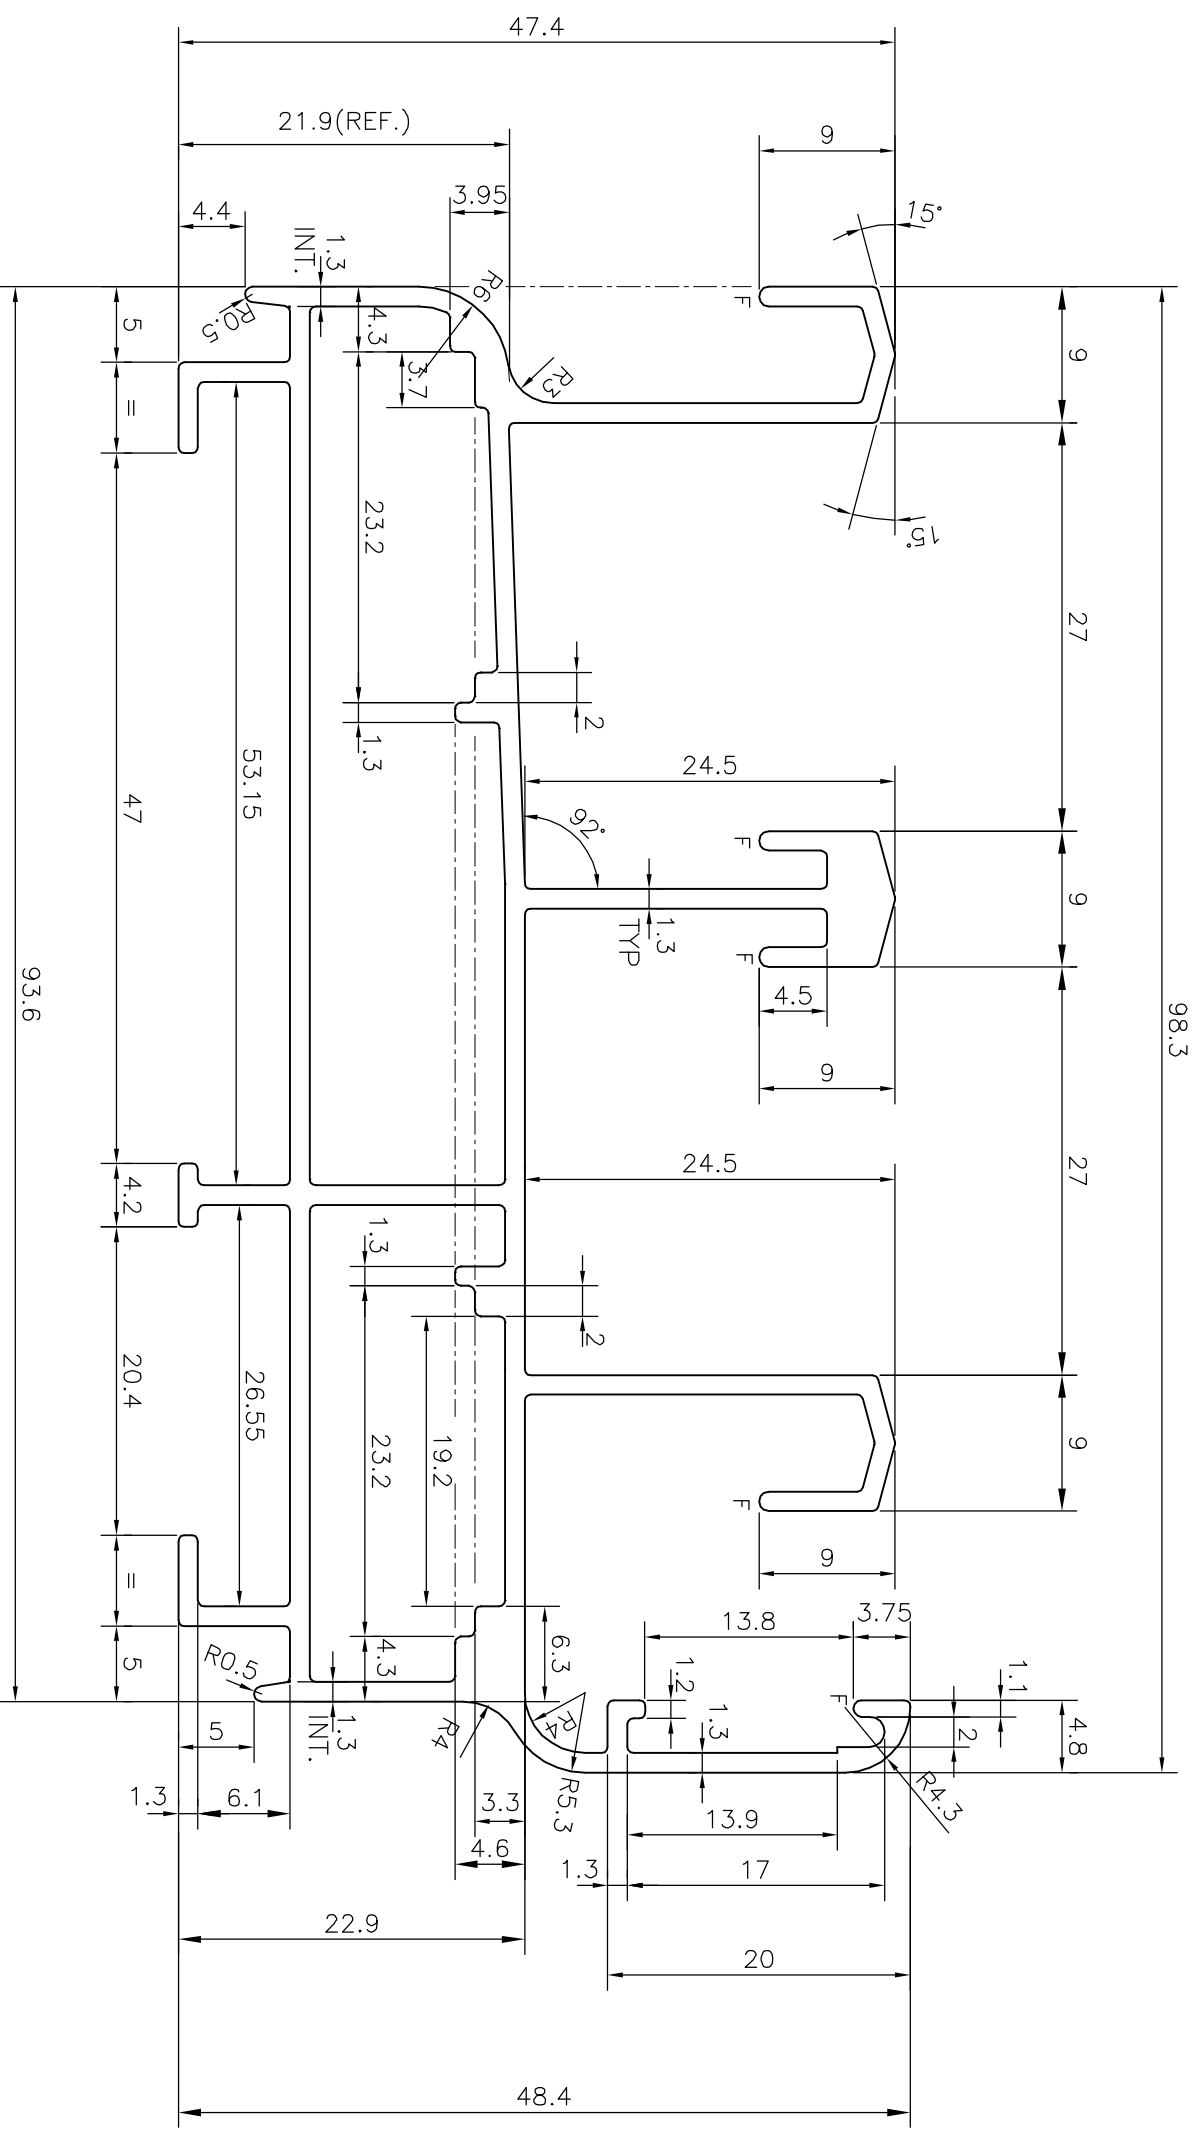

F = FULL RADIUS (5 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

| | | | |
|---------------------|----------------------|----------------------|-----------------------|
| UPTO 6.40mm - ±0.20 | UPTO 32.0mm - ±0.38 | UPTO 120.0mm - ±0.85 | UPTO 320.00mm - ±1.70 |
| UPTO 10.0mm - ±0.23 | UPTO 50.0mm - ±0.46 | UPTO 160.0mm - ±1.02 | |
| UPTO 12.0mm - ±0.25 | UPTO 60.0mm - ±0.53 | UPTO 200.0mm - ±1.14 | |
| UPTO 16.0mm - ±0.28 | UPTO 80.0mm - ±0.69 | UPTO 250.0mm - ±1.40 | |
| UPTO 25.0mm - ±0.30 | UPTO 100.0mm - ±0.75 | UPTO 300.0mm - ±1.65 | |

JINDAL
SYMBOL OF QUALITY
AN ISO 9002 COMPANY
JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED

| | | | |
|---------------------|--------------------------------------|----------------------|---------|
| PARTY'S NAME | FULL SPACE INTERIORS, MUMBAI | SCALE | 2:1 |
| PARTY'S DRAWING No. | AS PER AutocAD DRAWING-FSI-AL-DIE-15 | AREA mm ² | 600.893 |
| ALLOY & TEMPER | 6063 T6 | PERIMETER mm. | 590.007 |
| DESCRIPTION | WINDOW SECTION | WEIGHT kg/m | 1.622 |
| | | DRAWING No. | P-16725 |
| | | SECTION No. | - |
| | | DRAWING No. | S5272 |
| | | DRAWING No. | 21869 |

