P–21402

21933

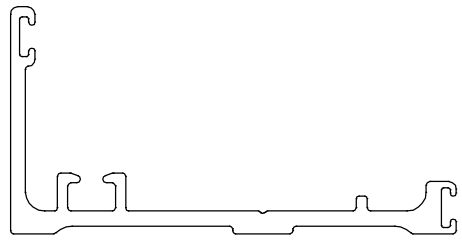

SCALE:– 1:1

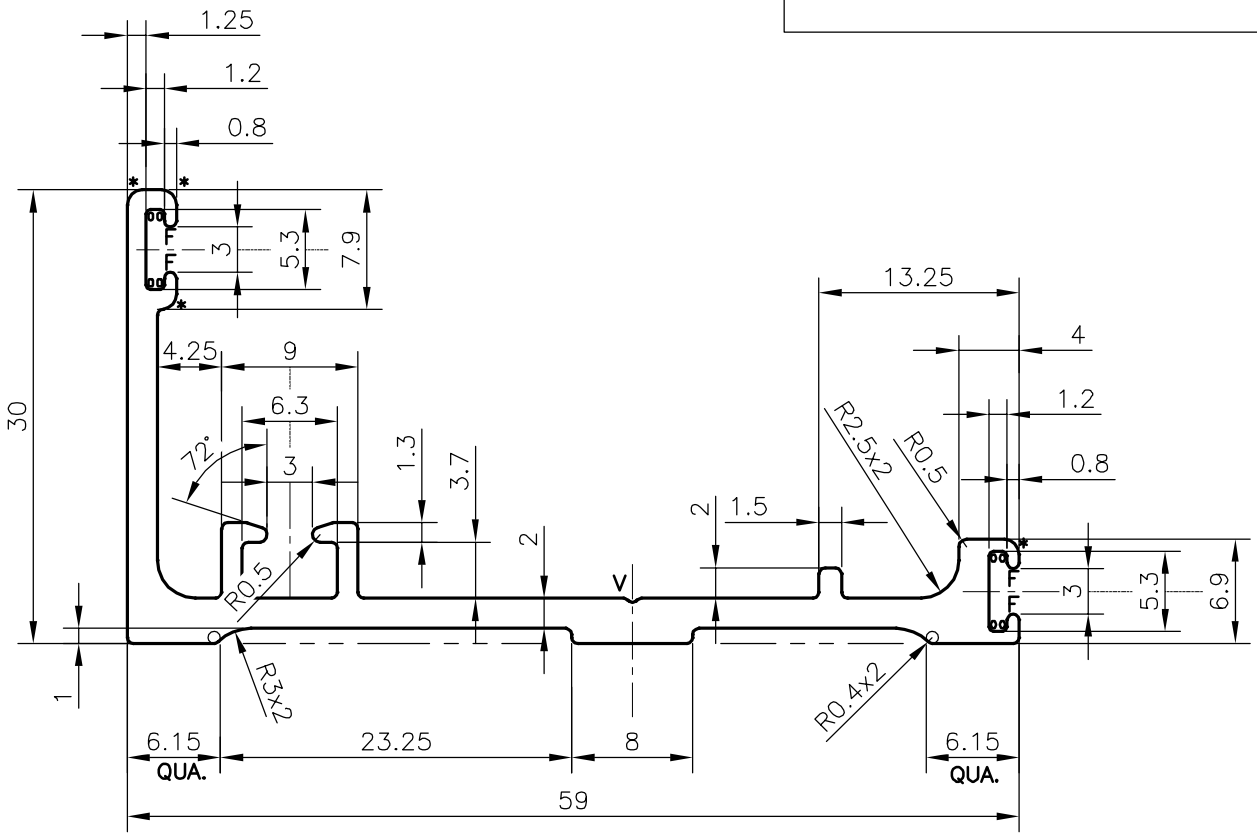

SCALE:– 2:1

V="V" GROOVE 0.3x90° (1 PLACE)
0 = 0.3mm RADIUS (8 PLACES)
* = 1mm RADIUS (4 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm – ±0.20	UPTO 32.0mm – ±0.38	UPTO 120.0mm – ±0.85	1. STRAIGHTNESS=1.7mm/M
UPTO 10.0mm – ±0.23	UPTO 50.0mm – ±0.46	UPTO 160.0mm – ±1.02	2. TWIST=1.7mm/M
UPTO 12.0mm – ±0.25	UPTO 60.0mm – ±0.53	UPTO 200.0mm – ±1.14	3. ANGULARITY= ±2°
UPTO 16.0mm – ±0.28	UPTO 80.0mm – ±0.69	UPTO 250.0mm – ±1.40	4. FLATNESS =0.007xWIDTH
UPTO 25.0mm – ±0.30	UPTO 100.0mm – ±0.75	UPTO 300.0mm – ±1.65	

JINDAL

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BANGALORE–560073 (INDIA)

	NAME	DATE
DRAWN	DARPAN	02–09–2020
CHECKED		
APPROVED	B.NATARAJA	12/09/2020

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:3965–1981 , UNLESS OTHERWISE SPECIFIED

SCALE	2:1
AREA mm^2	222.796
PERIMETER mm.	227.726
WEIGHT kg/m	0.602

PARTY'S NAME	AASTHA ALUMINA (P) LIMITED, GURGAON
PARTY'S DRAWING No.	AA–T1–WO–09
ALLOY & TEMPER	6063 T6
DESCRIPTION	WINDOW OUTER SECTION

DRAWING No.	SECTION No.
P–21402	–
21933	21933