



P-13286-1
S4010
X1742
22997

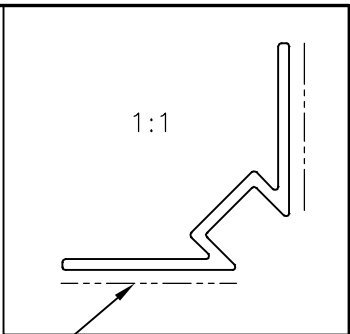


EXPOSED SURFACE

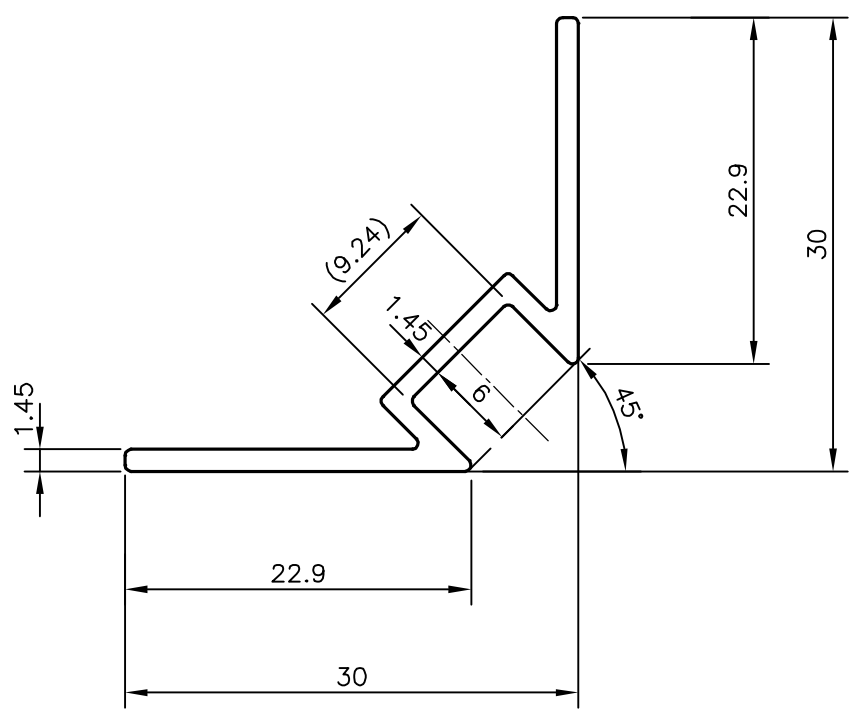

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	DRAWN	J.P.KAUSHIK	DATE	23-01-2014	
		CHECKED				
		APPROVED	S.S.GARG		03-02-2014	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED		SCALE		2:1		
		AREA mm <sup>2</sup>		94.406		
		PERIMETER mm.		127.976		
PARTY'S NAME		4U INTERIORS & ALUMINIUMS PVT. LTD., MUMBAI		WEIGHT kg/m		0.255
PARTY'S DRAWING No.		AS PER DRAWING		DRAWING No.	SECTION No.	
ALLOY & TEMPER		6063 T6		P-13286-1	-	
DESCRIPTION		MISC. SECTION		S4010	S4010	
				X1742	X1742	
				22997	22997	