


P-17751-1

S5643


24583

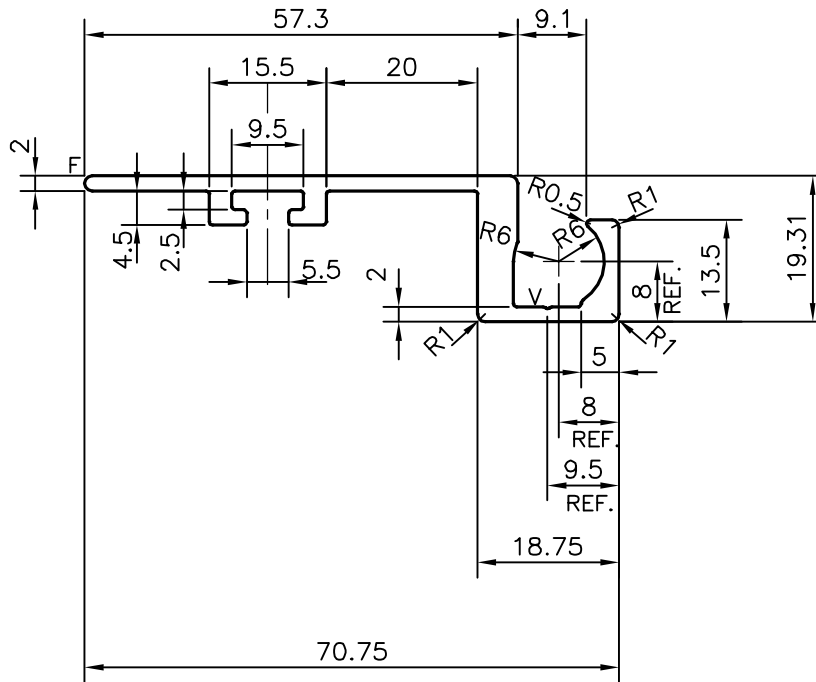

V = V GROOVE 0.3x90° (ONE PLACES)
 F = FULL RADIUS (ONE PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	DRAWN	J.P.KAUSHIK	DATE	13-01-2018
		CHECKED			
		APPROVED	B.NATARAJA		16-01-2018
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED		SCALE		1:1	
		AREA mm ²		297.665	
		PERIMETER mm.		225.673	
PARTY'S NAME	HANSPAL TRADERS, KAPURTHALA	WEIGHT kg/m		0.804	
PARTY'S DRAWING No.	AS PER DRAWING	DRAWING No.	P-17751-1	SECTION No.	-
ALLOY & TEMPER	63400 WP		S5643		S5643
			24583		24583
DESCRIPTION	COVER SECTION				