


P-13196

S3939

24874

7 RIBS, AT EQUALLY SPACED

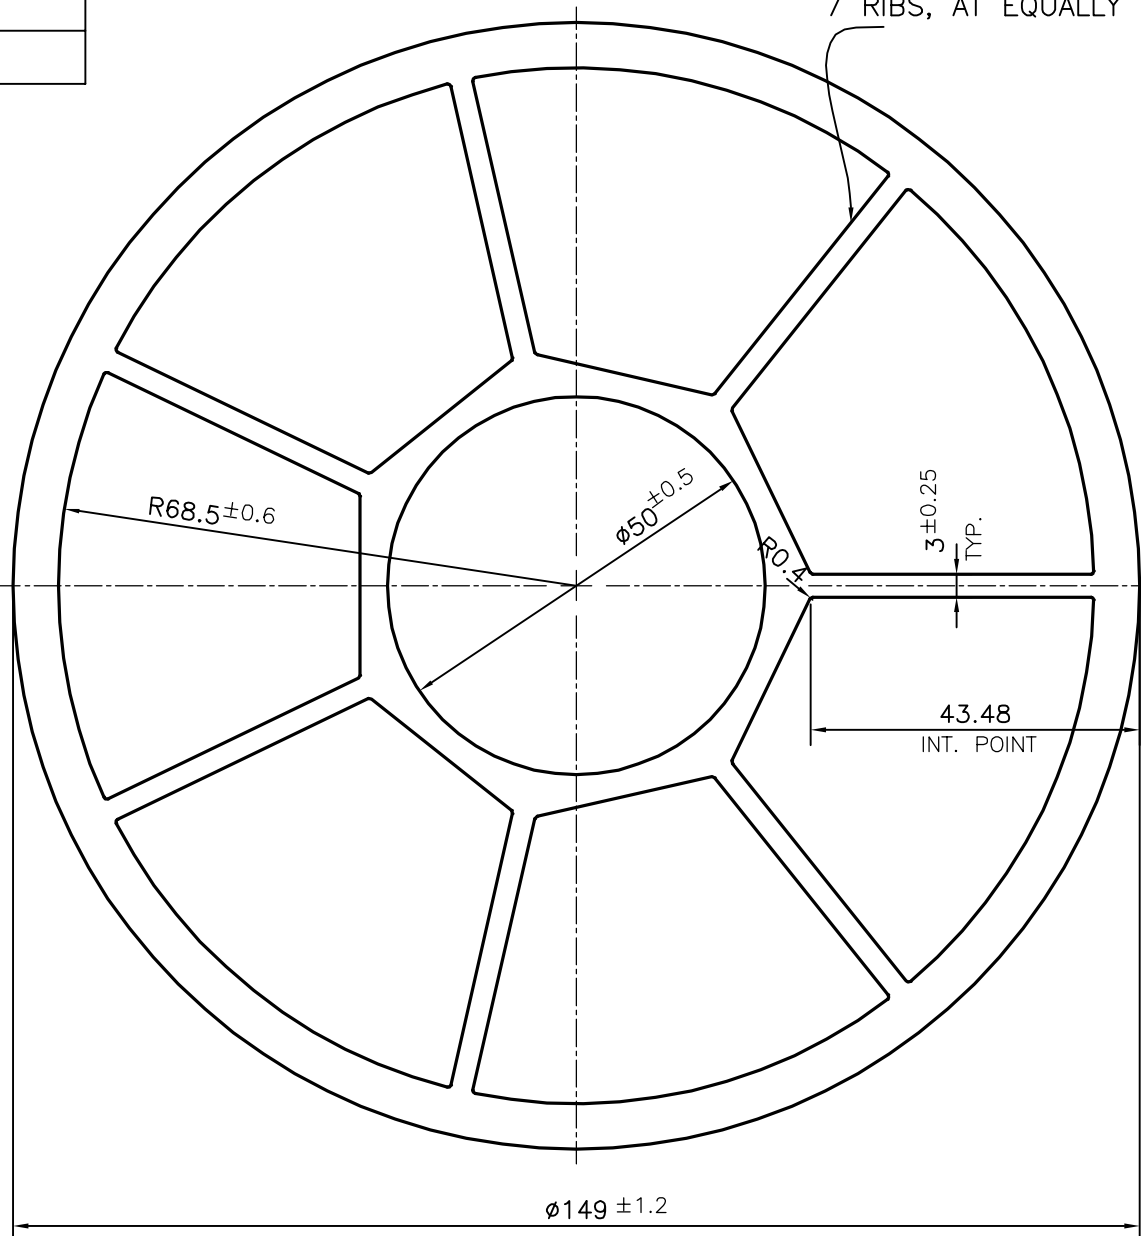

☞ **STRAIGHTNESS/BEND** - 1.7 mm/1 MTR LENGTH.
MAXIMUM - 4 mm/4 MTR LENGTH.

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. ANGULARITY= ±2° 2. FLATNESS = 0.007xWIDTH
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	


 SYMBOL OF QUALITY
 AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
 BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	PARVESH	23-11-2013
CHECKED		
APPROVED	S.S.GARG	04-12-2013

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER IS:6477-1983, UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm ²	4269.178
PERIMETER mm.	468.097
WEIGHT kg/m	11.527

PARTY'S NAME NANTEX MACHINERIES PVT. LTD., GURGAON

DRAWING No. SECTION No.

PARTY'S DRAWING No. ROLLER_X7_DRG

P-13196

-

ALLOY & TEMPER 6063 T6

S3939

S3939

24874

24874

DESCRIPTION TEXTILE SECTION-PULLEY