


P-14447-1
S4418
25258

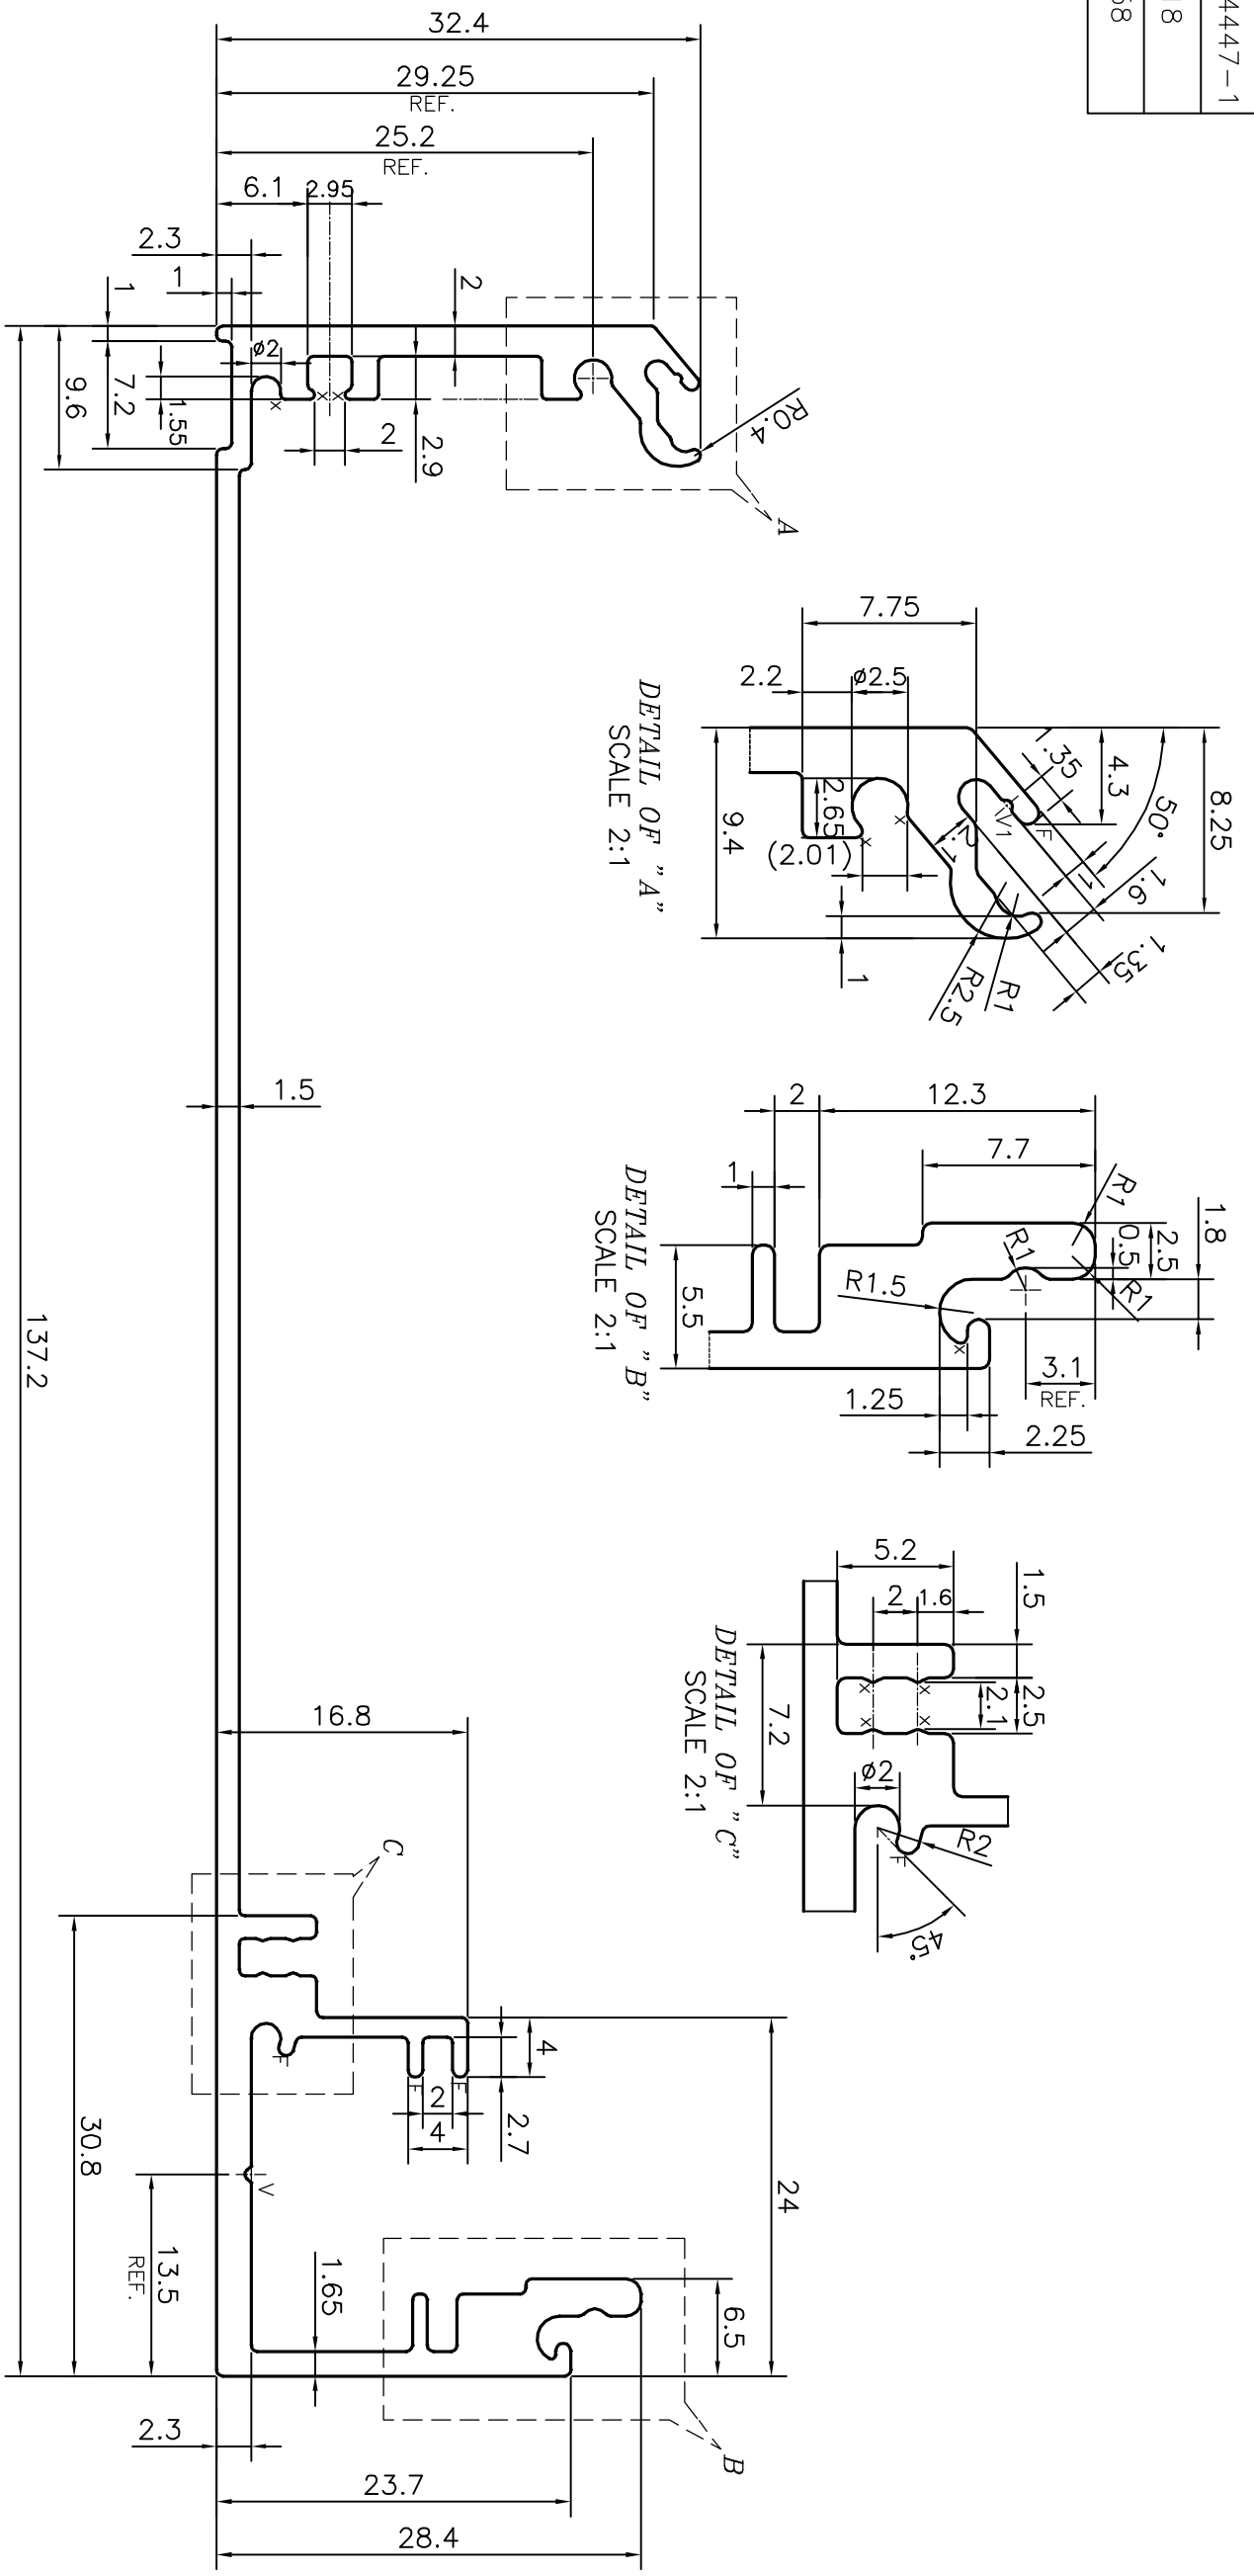

V = VEE GROOVE 0.4x90° (1 PLACE)
 V1 = VEE GROOVE 0.25x90° (1 PLACE)
 F = FULL RADIUS (3 PLACES)
 X = RADIUS 0.3mm. (10 PLACES)


TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	
	DRAWN	NAME
CHECKED	DATE	
APPROVED	S.S.GARG	31-03-2015

1. ALL DIMENSIONS ARE IN mm.
 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	AVALON TECHNOLOGIES PVT. LTD., CHENNAI	
PARTY'S DRAWING No.	AS PER AUTOCAD DRAWING & SAMPLE	
ALLOY & TEMPER	HE9 WP	
DESCRIPTION	ELECTRICAL SECTION	

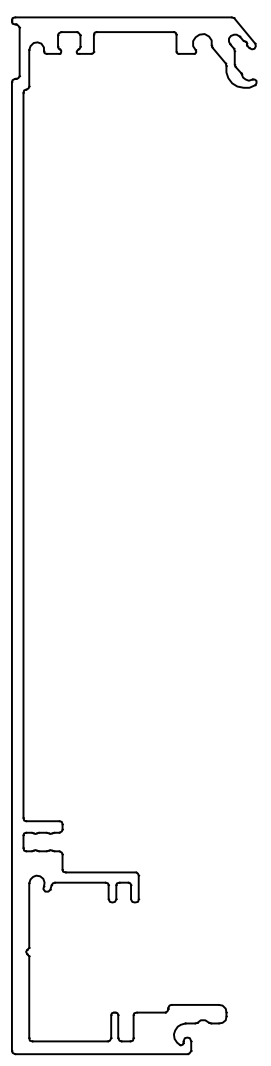

SCALE: - 1:1