



P-12660-3
S3718
25287

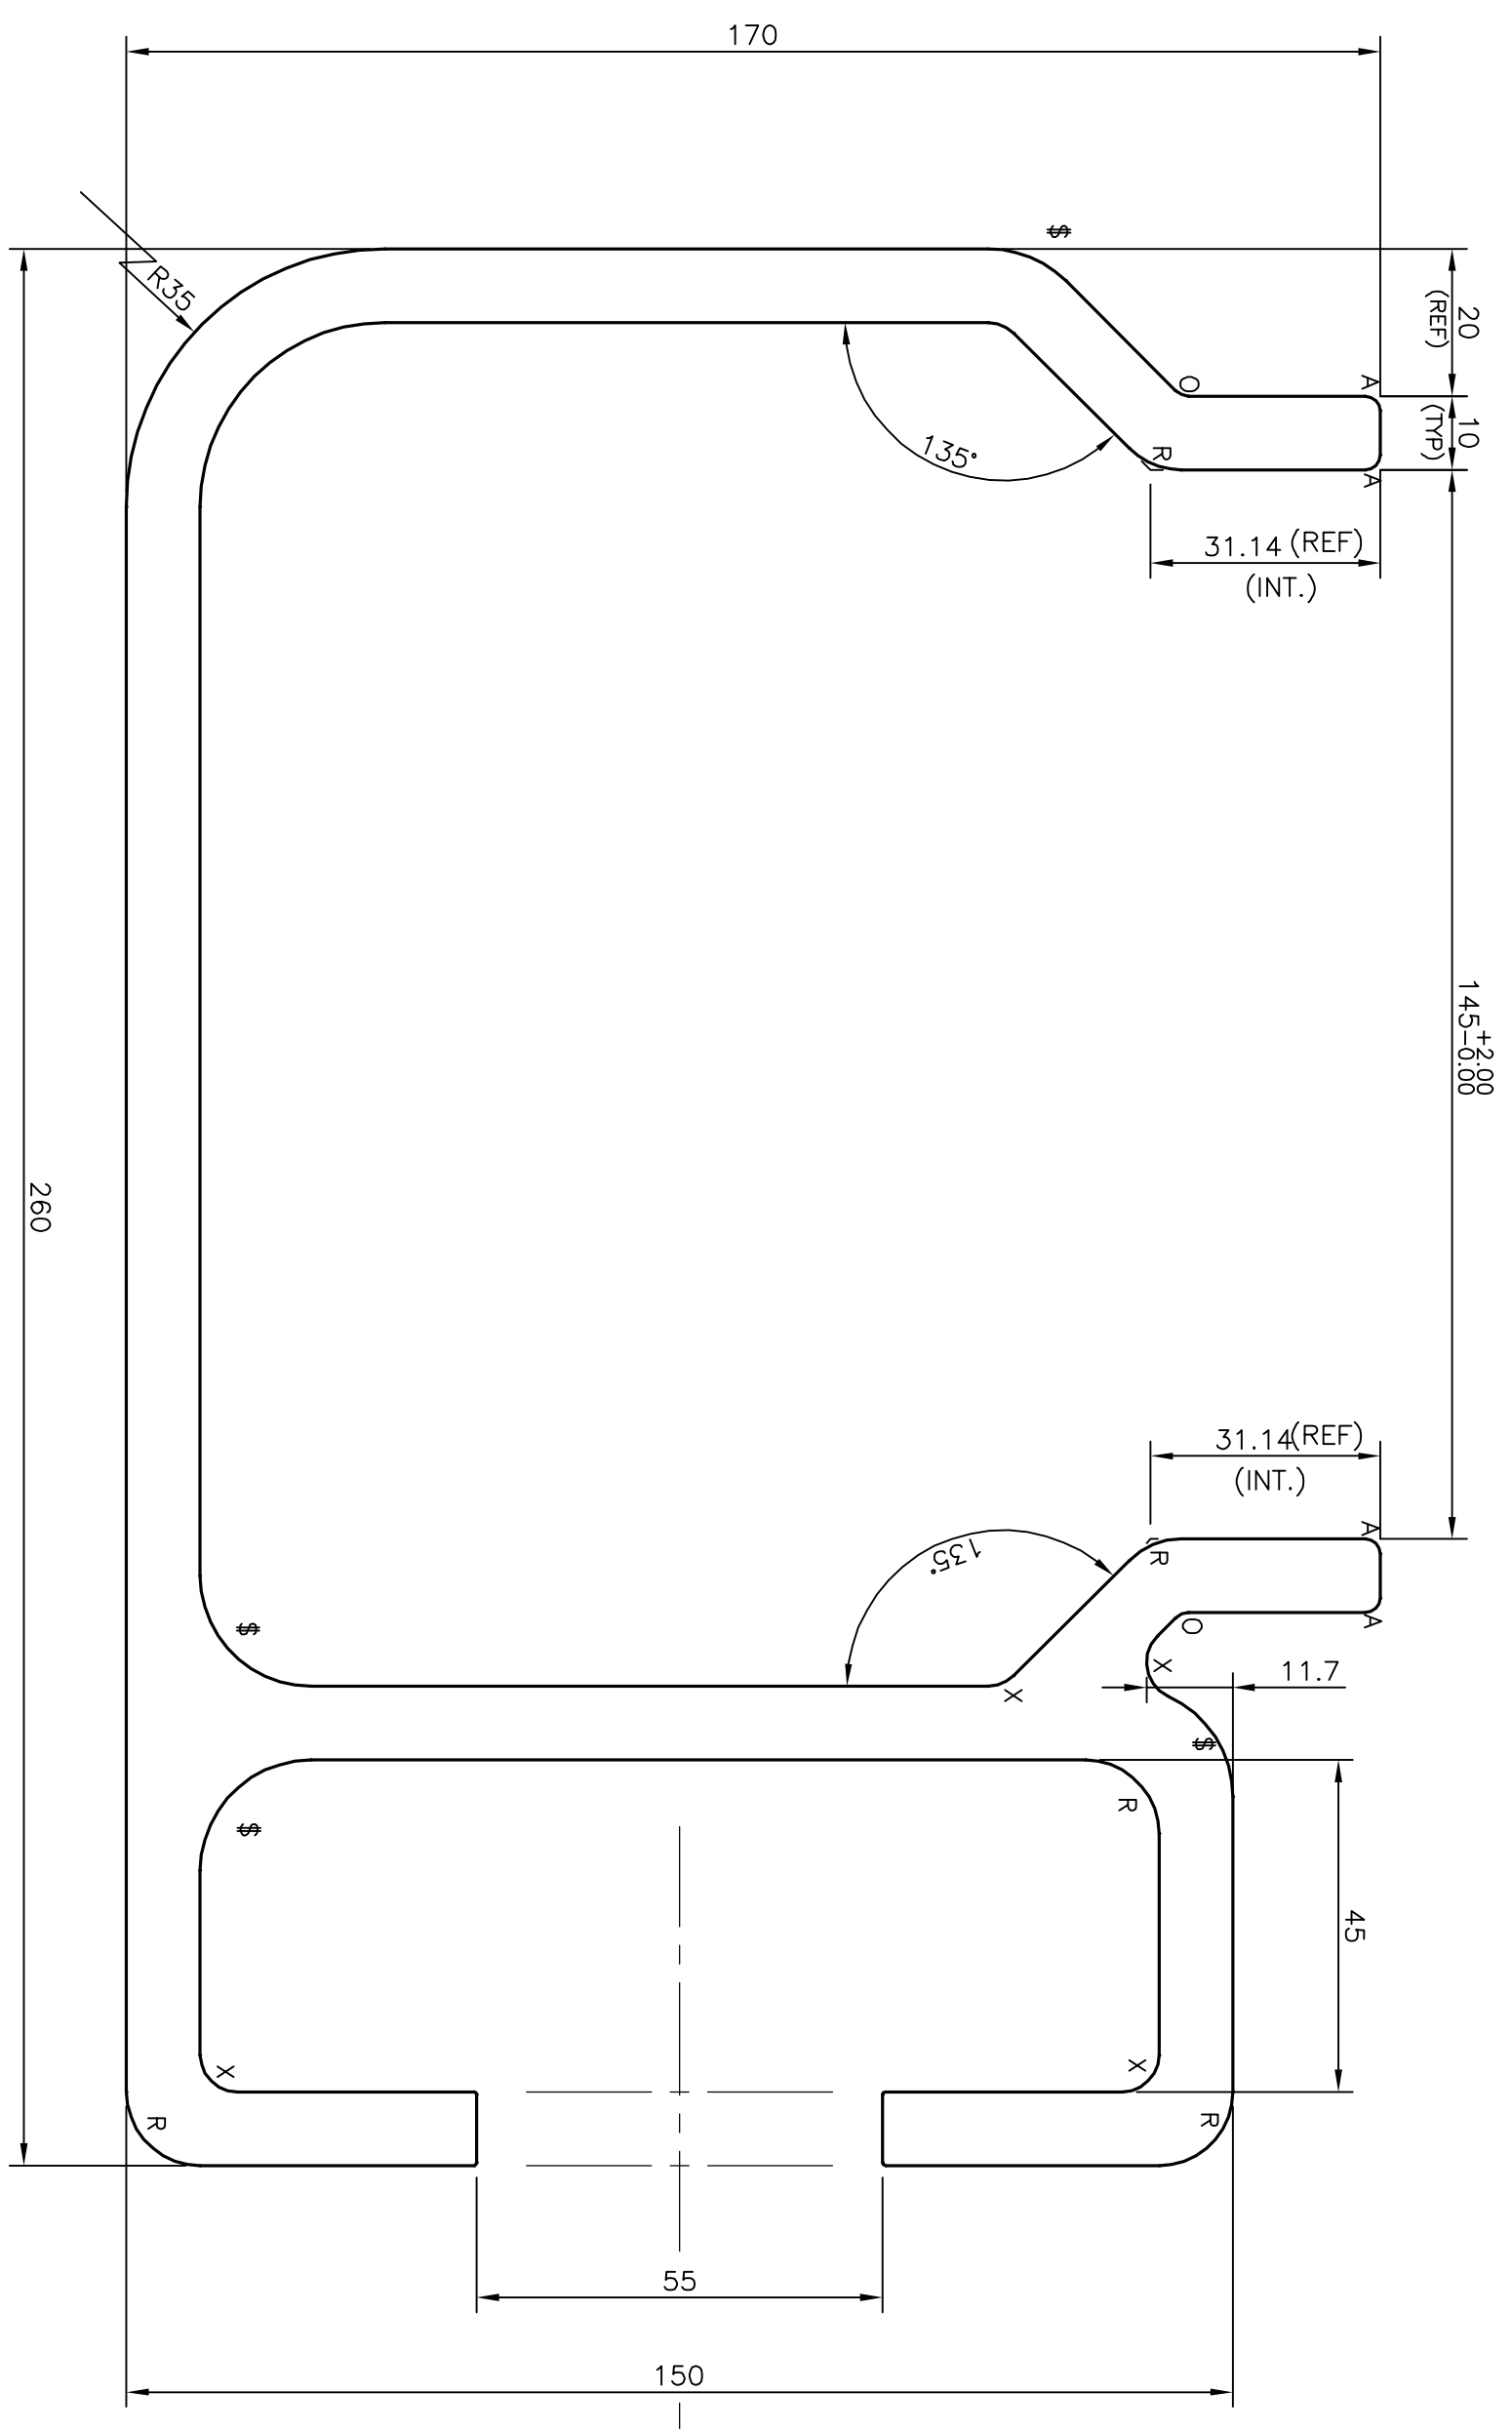

GENERAL WALL THICKNESS = 10mm
 \$ = 15 mm RADIUS (4 PLACES)
 R = 10 mm RADIUS (5 PLACES)
 X = 5 mm RADIUS (4 PLACES)
 O = 2.5 mm RADIUS (2 PLACES)
 A = 2 mm RADIUS (4 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS					
UPTO 6.40mm -	±0.20	UPTO 32.0mm -	±0.38	UPTO 120.0mm -	±0.85
UPTO 10.0mm -	±0.23	UPTO 50.0mm -	±0.46	UPTO 160.0mm -	±1.02
UPTO 12.0mm -	±0.25	UPTO 60.0mm -	±0.53	UPTO 200.0mm -	±1.14
UPTO 16.0mm -	±0.28	UPTO 80.0mm -	±0.69	UPTO 250.0mm -	±1.40
UPTO 25.0mm -	±0.30	UPTO 100.0mm -	±0.75	UPTO 300.0mm -	±1.65

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		DRAWN	NAME	DATE
				CHECKED	SRIYATHSA	24-04-2013
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED		PARTY'S NAME ALSTOM LIMITED, CHENNAI		APPROVED	S.S.GARG	24-04-2013
				SCALE	1:1	
PARTY'S DRAWING No. 73090 REV-E & AS PER REQUIREMENT		ALLOY & TEMPER 6060 T6		AREA	mm ²	7400.524
				PERIMETER	mm.	1436.175
DESCRIPTION CONTACT HOLDER SECTION		PARTY'S DRAWING No. 73090 REV-E & AS PER REQUIREMENT		WEIGHT	kg/m	19.981
				DRAWING No.	SECTION No.	