



P-16917-1
S5350
27131

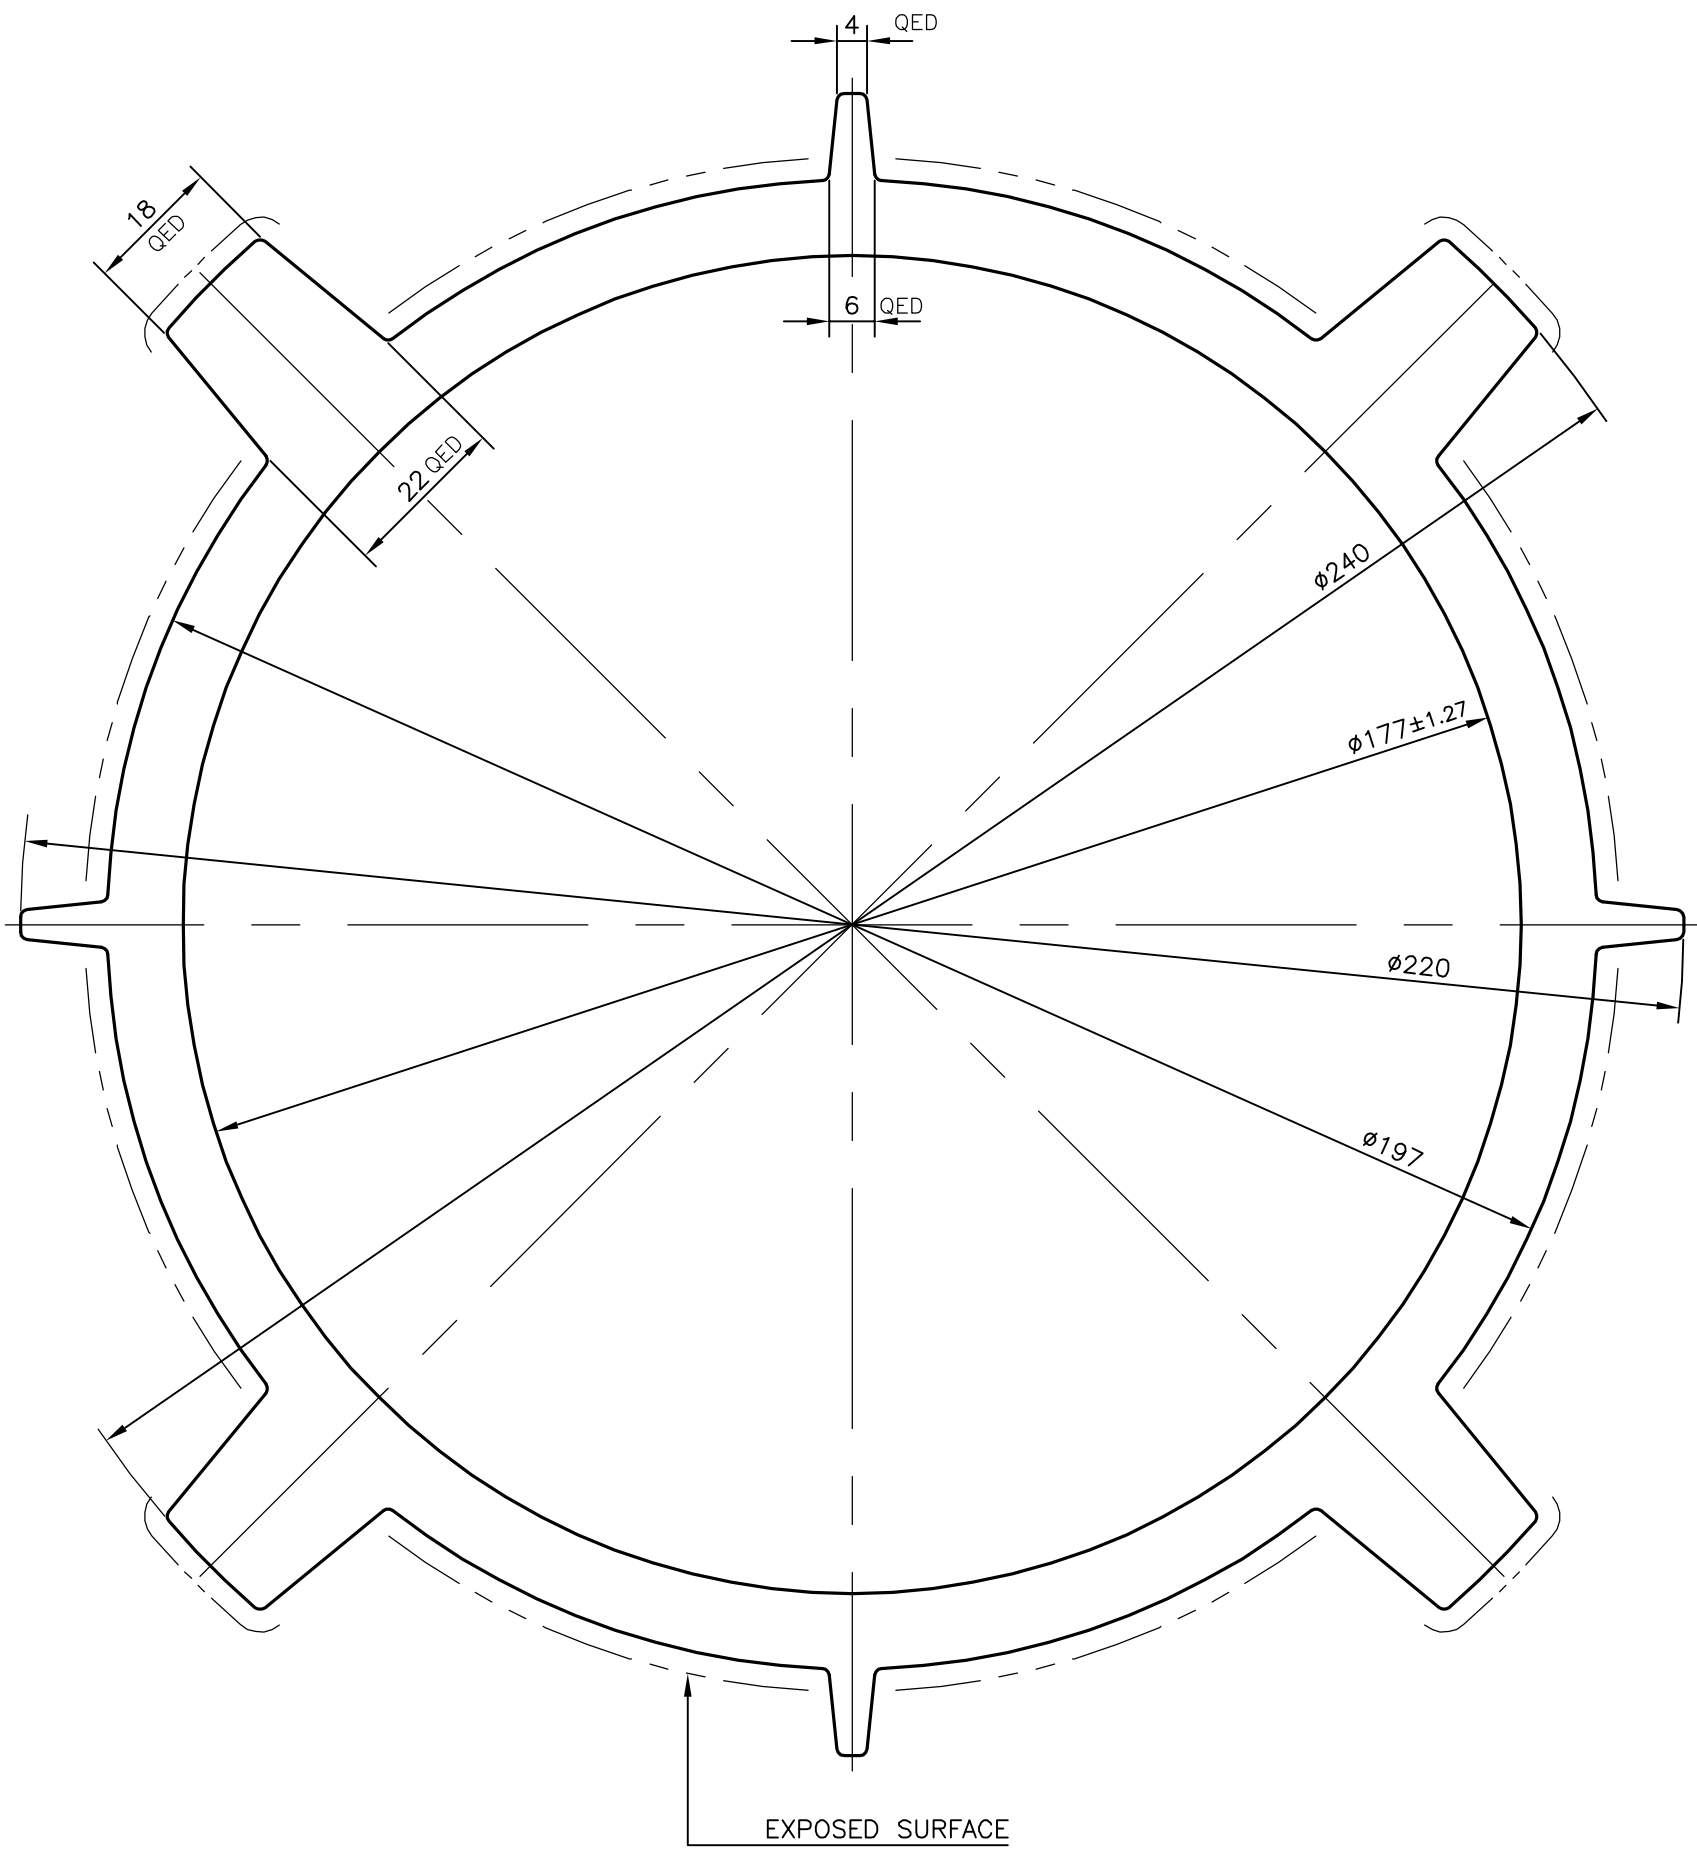

COMMON RADIUS WILL BE 1.00 mm

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS			
UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.006xWIDTH
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40	
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52	
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00		
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14		

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	NAME	DATE
		DRAWN	KIRAN
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED		CHECKED	
		APPROVED	B.NATARAJ
PARTY'S NAME KULKARNI PUMPS PVT. LTD., DOMBIVILI		SCALE	1:1
		AREA mm ²	7826.427
PARTY'S DRAWING No. KS 2675 REV.1 & REQUIREMENT		PERIMETER mm.	848.42
		WEIGHT kg/m	21.131
ALLOY & TEMPER HE9 WP		DRAWING No.	SECTION No.
		P-16917-1	-
DESCRIPTION STATOR HOUSING SECTION		S5350	S5350
		27131	27131