P−13331−1
S3993
28151

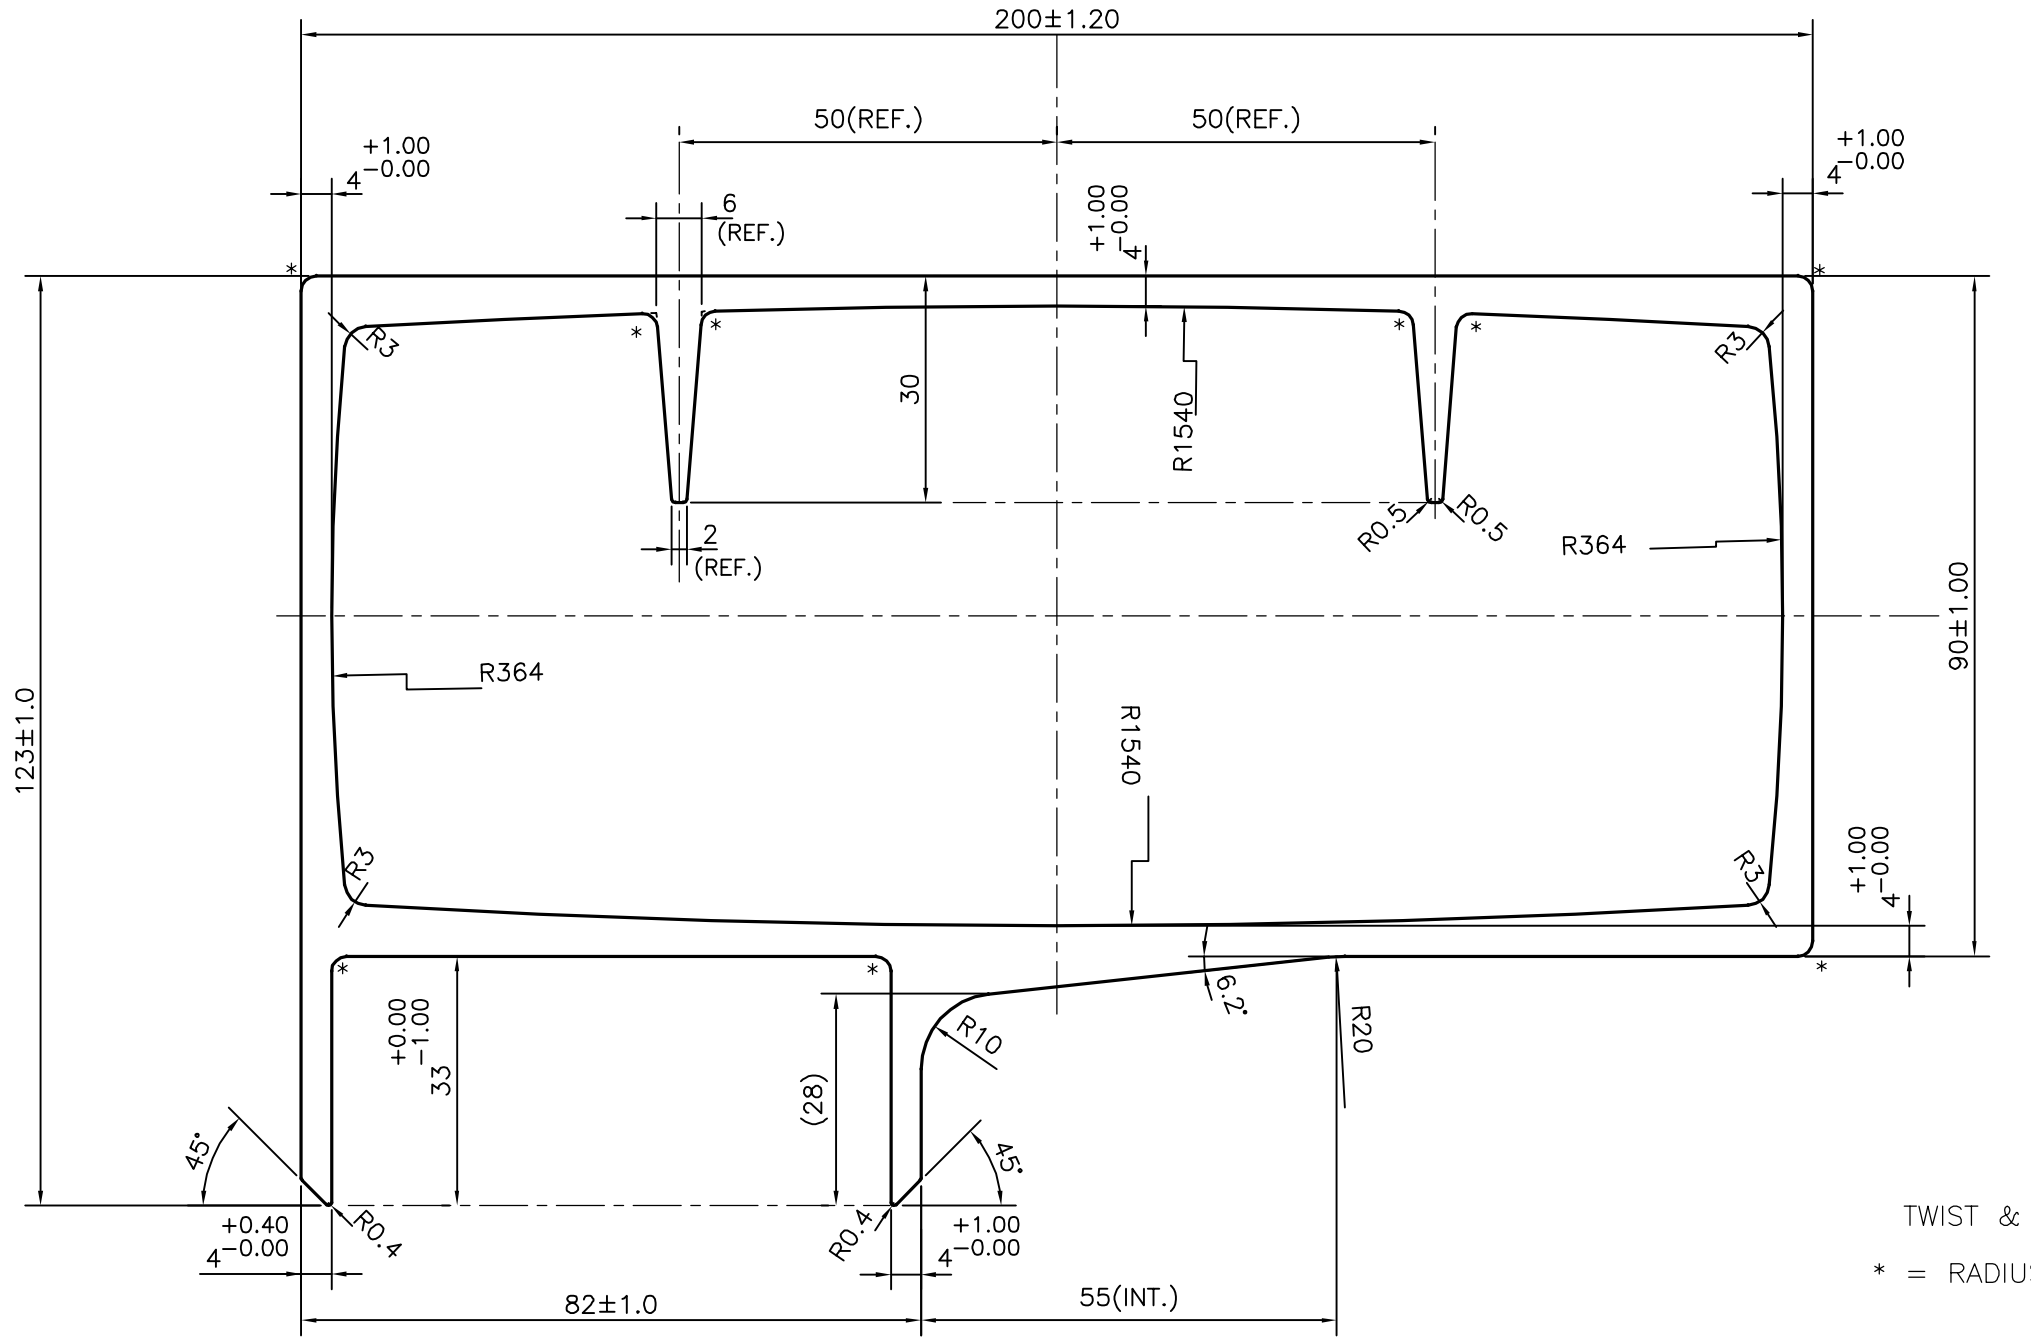

TWIST & BEND=2.0mm/M

* = RADIUS 2.0 (9 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS			
UPTO 6.40mm − ±0.20 UPTO 10.0mm − ±0.23 UPTO 12.0mm − ±0.25 UPTO 16.0mm − ±0.28 UPTO 25.0mm − ±0.30	UPTO 32.0mm − ±0.38 UPTO 50.0mm − ±0.46 UPTO 60.0mm − ±0.53 UPTO 80.0mm − ±0.69 UPTO 100.0mm − ±0.75	UPTO 120.0mm − ±0.85 UPTO 160.0mm − ±1.02 UPTO 200.0mm − ±1.14 UPTO 250.0mm − ±1.40 UPTO 300.0mm − ±1.65	UPTO 320.00mm − ±1.70

JINDAL
SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE−560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	11−01−2014
CHECKED		
APPROVED	S.S.GARG	22−01−2014

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 2.0 mm.
3. TOLERANCES WILL BE AS PER BS:EN−12020−2 UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm^2	3380.106
PERIMETER mm.	694.3
WEIGHT kg/m	9.126

PARTY'S NAME	STANDARD RADIATERS (P) LTD., VADODARA
PARTY'S DRAWING No.	SRA 13009 REV:−01
ALLOY & TEMPER	6063 T5
DESCRIPTION	MISC. SECTION

DRAWING No.	SECTION No.
P−13331−1	−
S3993	S3993
28151	28151