
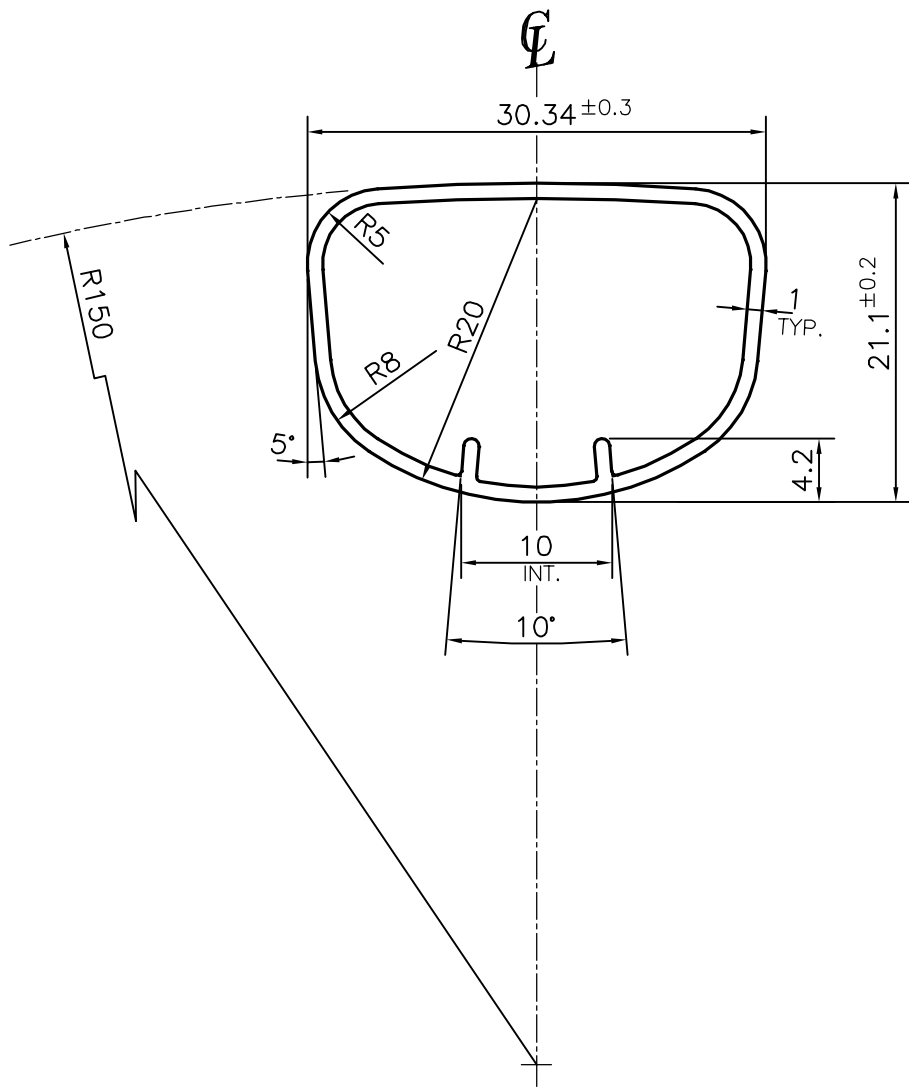


P-13431-1
S4056
28178



F = FULL RADIUS (2 POLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.007xWIDTH
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>	<p><b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)</p>	NAME	DATE
		DRAWN	PARVESH
		CHECKED	
		APPROVED	J.N. RAI
			08-03-2014
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.30 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED</p>		SCALE	2:1
		AREA mm <sup>2</sup>	88.87
		PERIMETER mm.	86.811
		WEIGHT kg/m	0.240
		DRAWING No.	SECTION No.
		P-13431-1	-
		S4056	S4056
		28178	28178
PARTY'S NAME	STOVEKRAFT PVT. LTD., BANGALORE		
PARTY'S DRAWING No.	AS PER AUTOCAD DRAWING-B		
ALLOY & TEMPER	6060 T6		
DESCRIPTION	INDUSTRIAL SECTION-FLAME GUARD		