


P-12677
S3728
28179

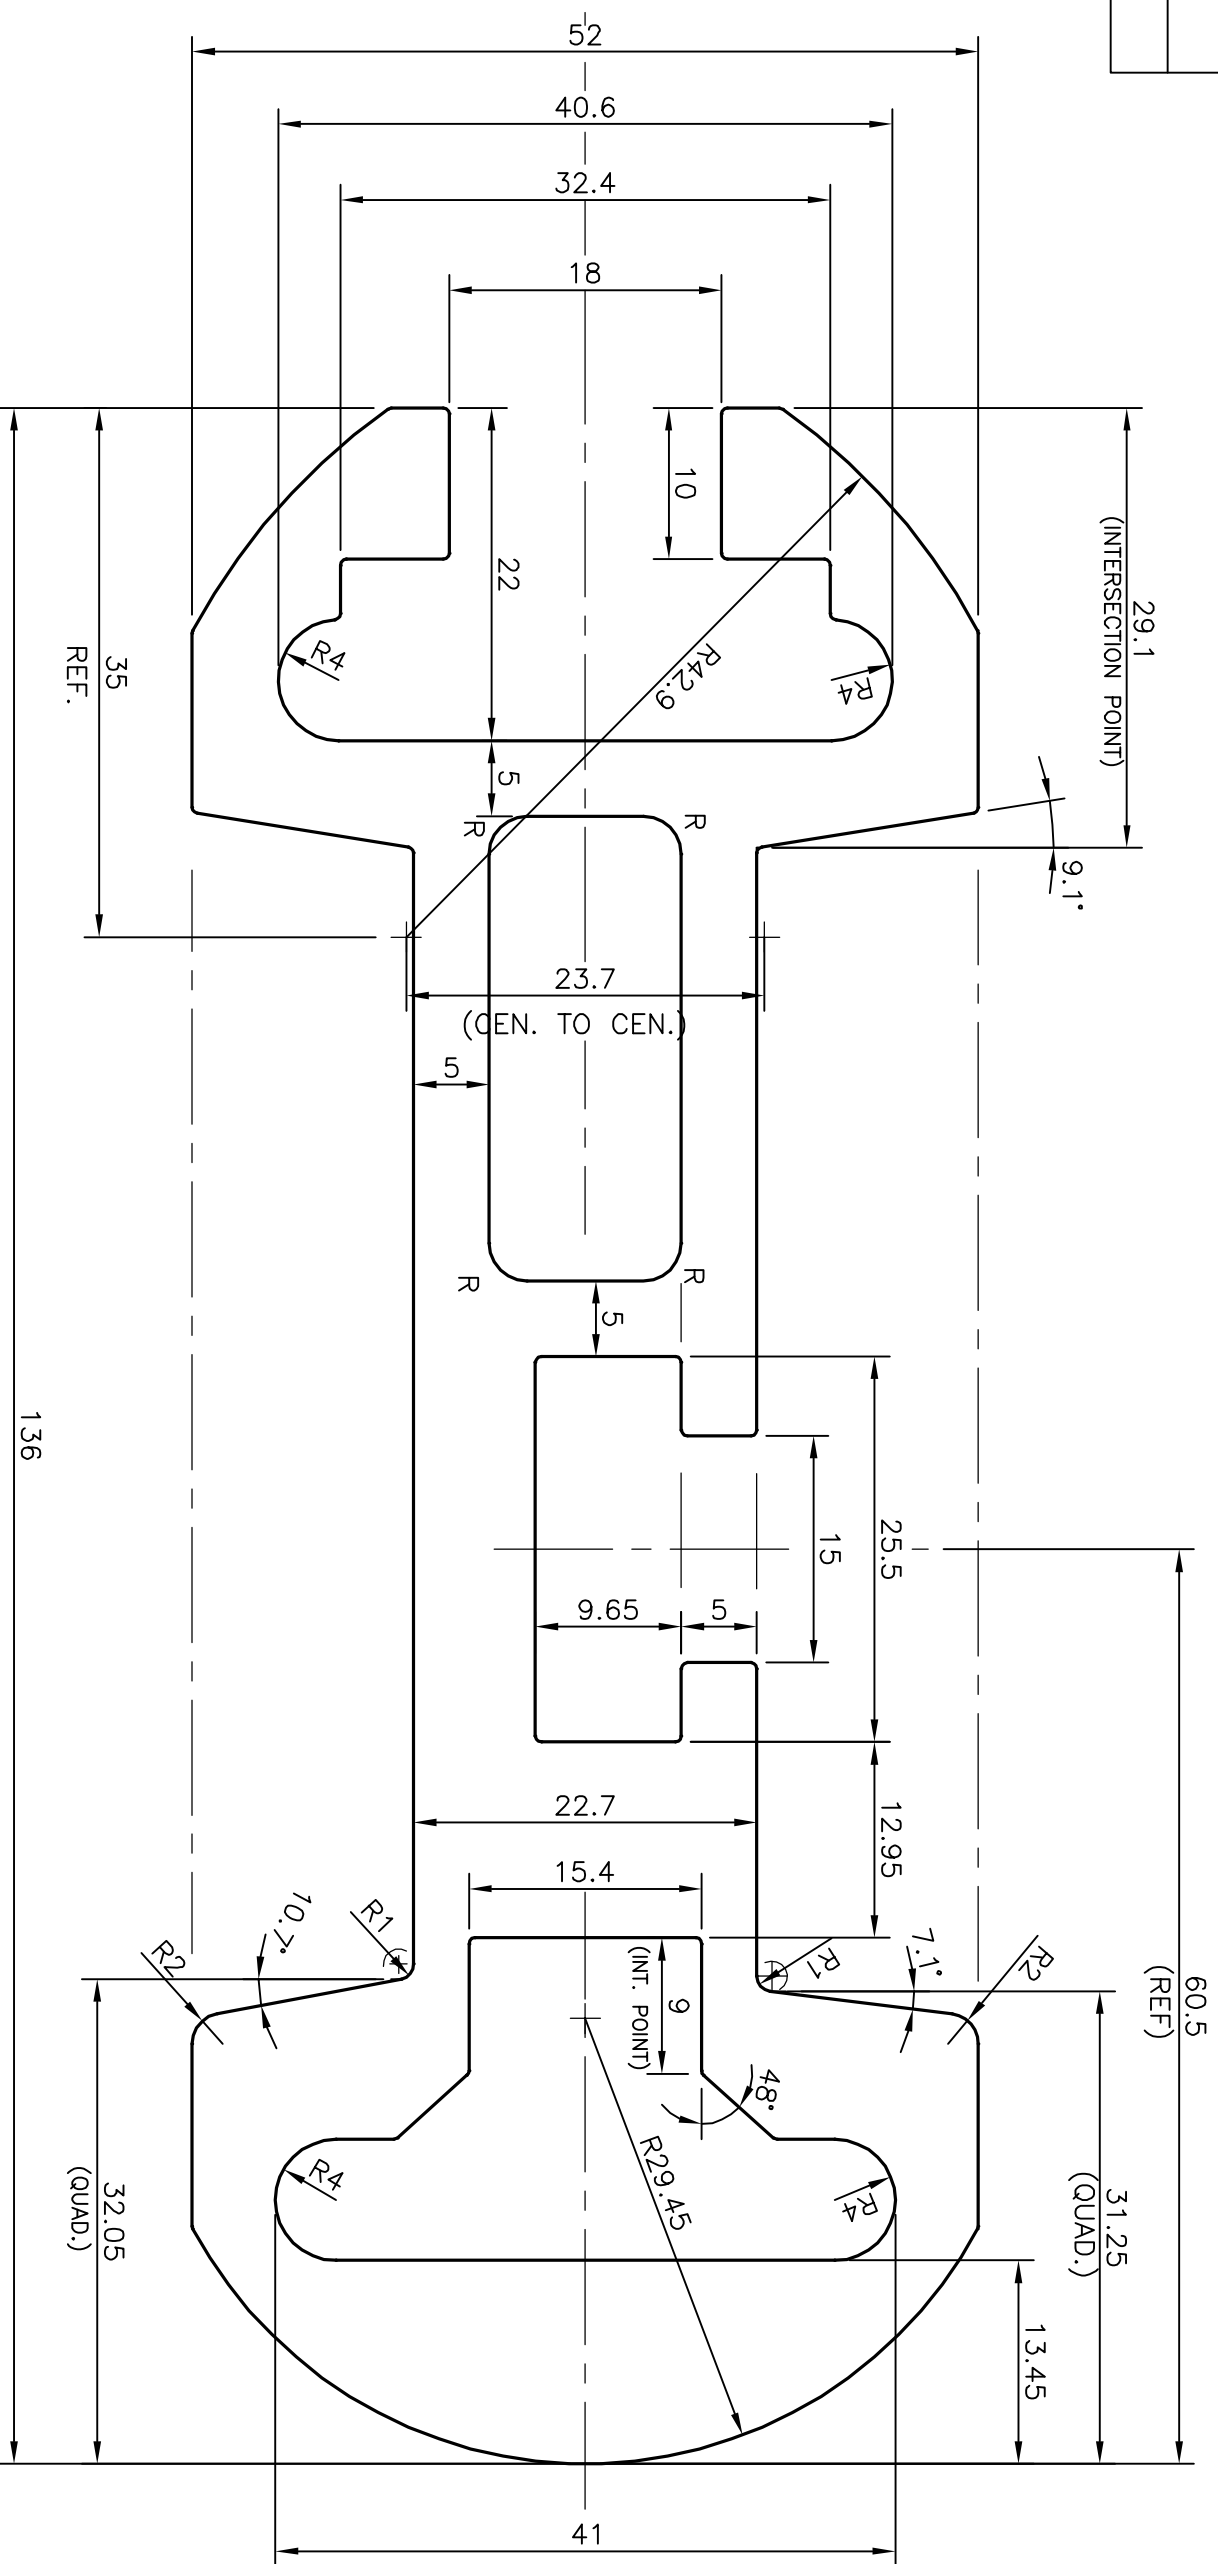


R = 2.5 mm RADIUS (4 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>		<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>	
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED</p>		<p>SCALE 2:1 AREA mm² 2538.400 PERIMETER mm. 518.294 WEIGHT kg/m 6.854</p>	

PARTY'S NAME	AAKRITI ENGINEERS, LUCKNOW	DRAWN	NAME	DATE
PARTY'S DRAWING No.	AS PER AUTOCAD DRAWING	CHECKED	SRIYATHSA	23-04-2013
ALLOY & TEMPER	6063 T6	APPROVED	S.S.GARG	04-05-2013
DESCRIPTION	MISC. SECTION			

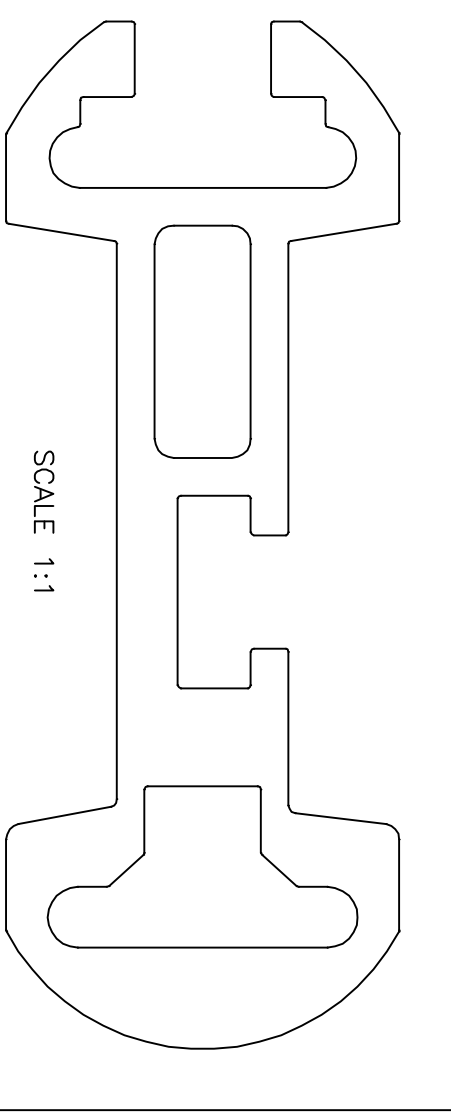

SCALE 1:1