



P-12907
S3815
28197

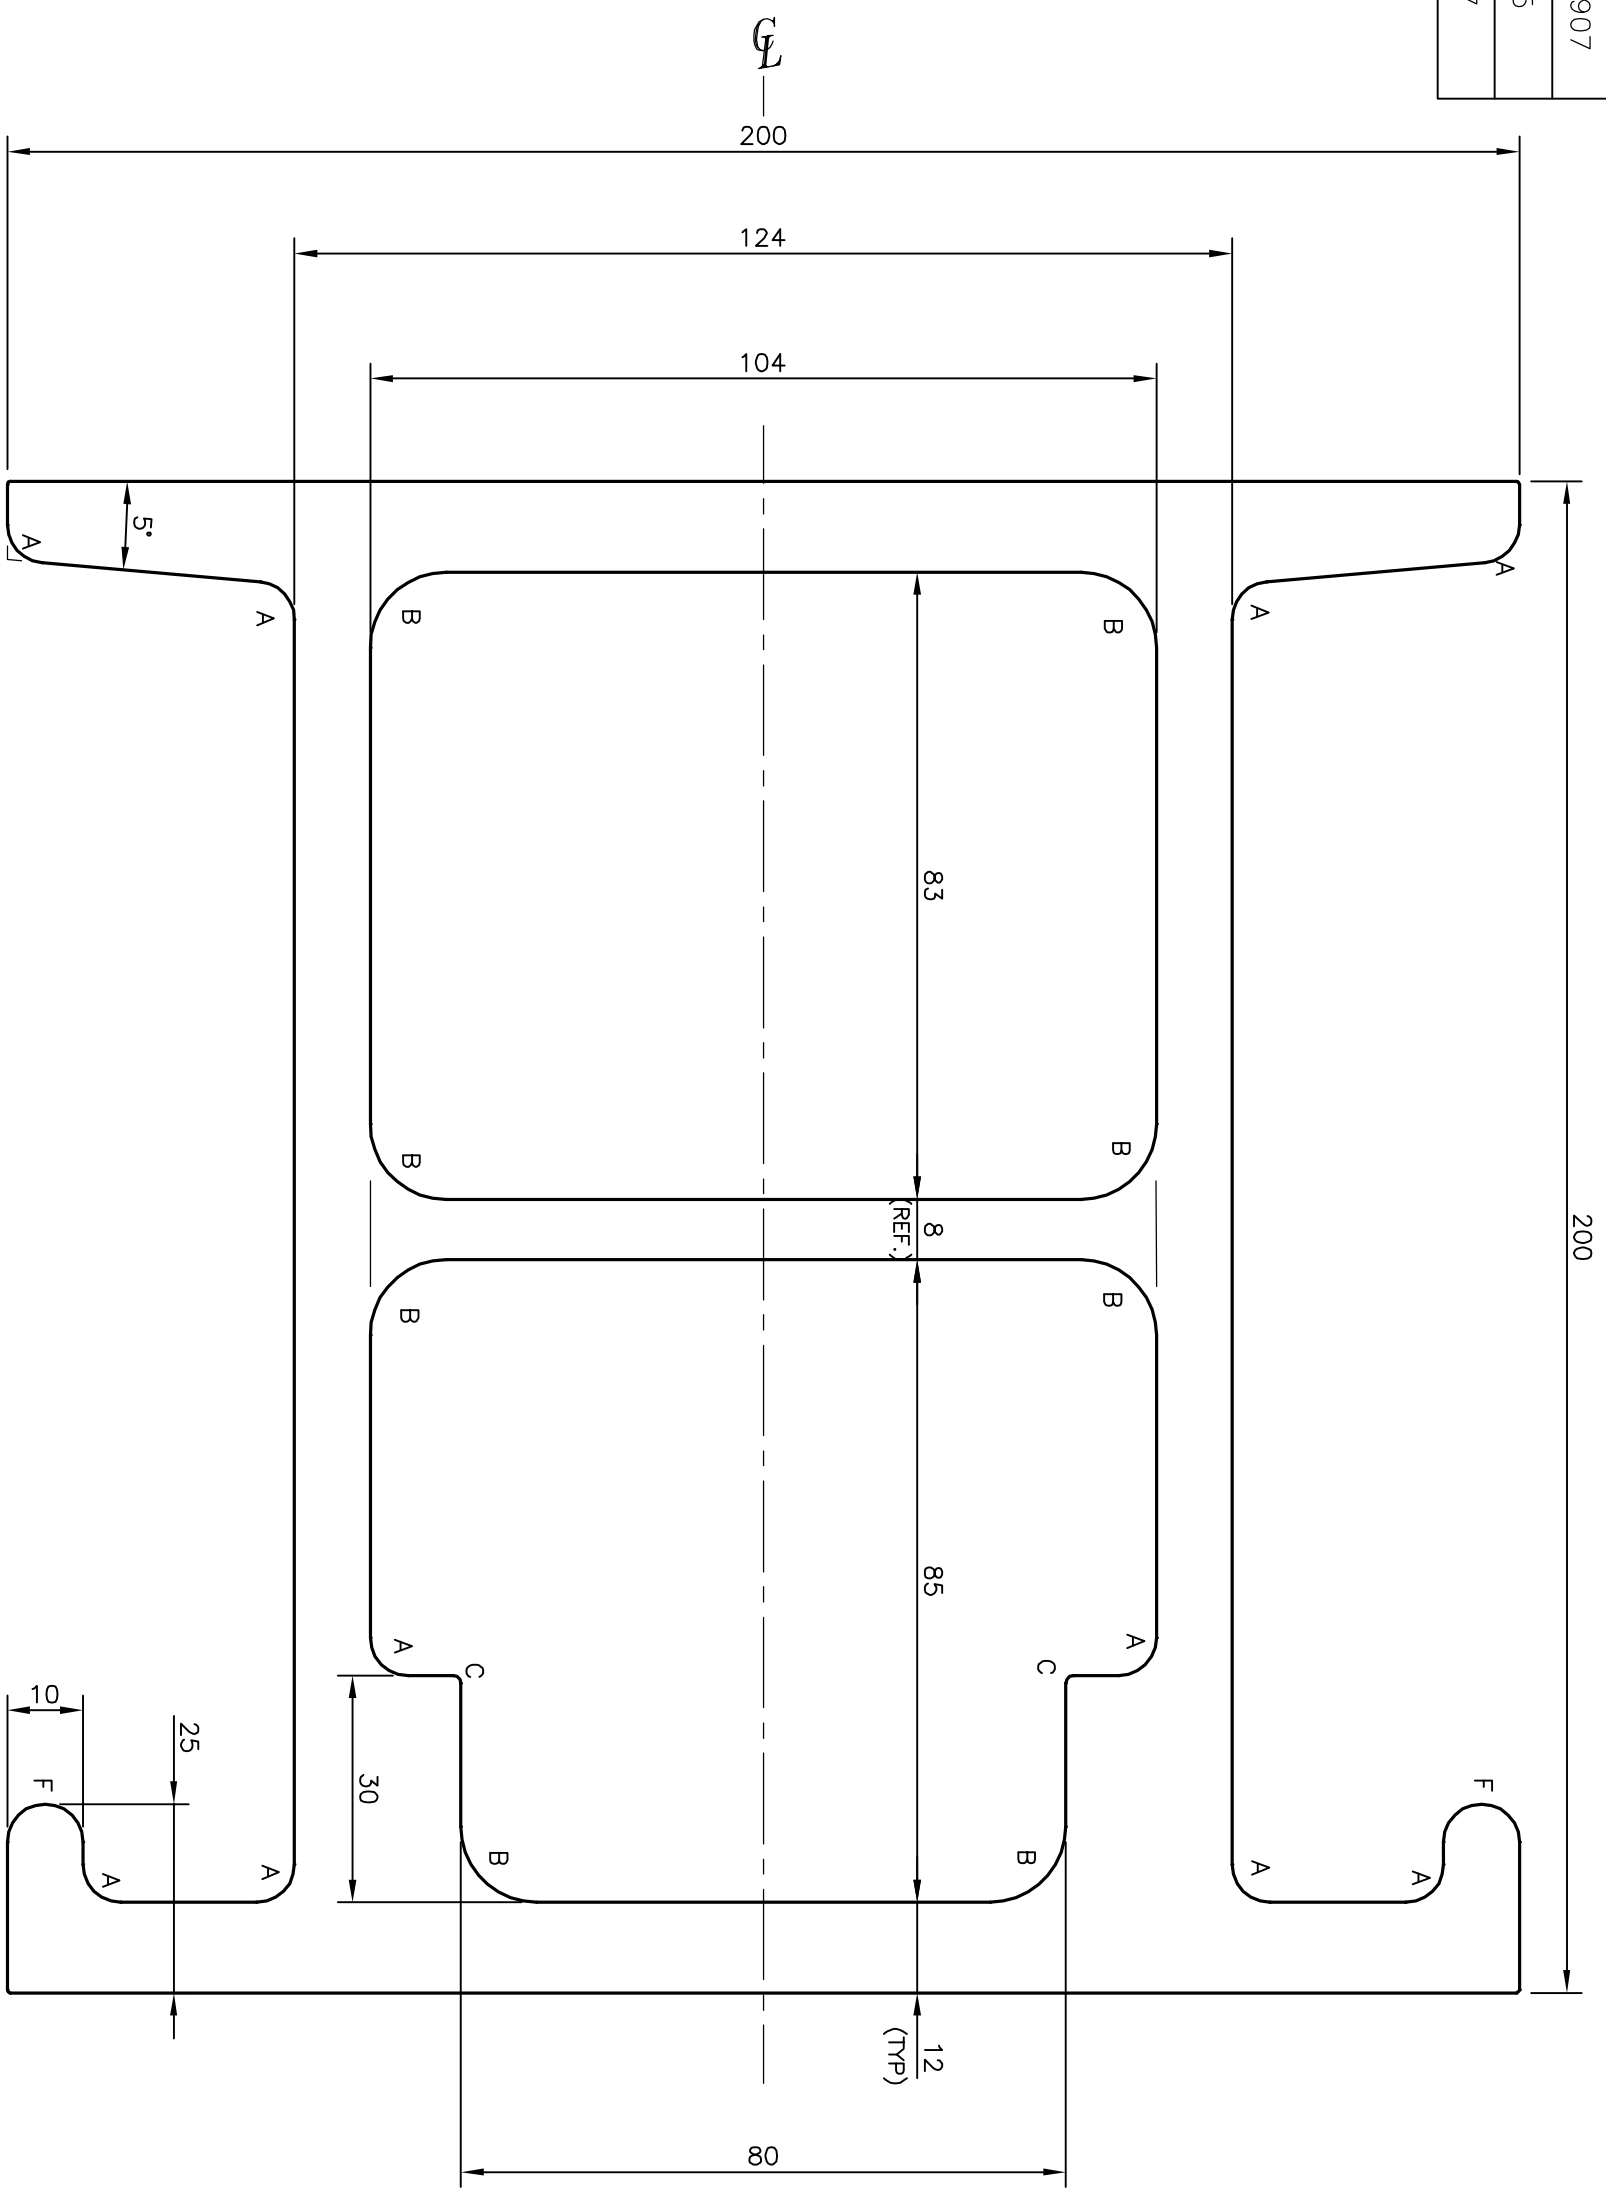

A = 5 mm RADIUS (10 PLACES)
 B = 10 mm RADIUS (8 PLACES)
 C = 1 mm RADIUS (2 PLACES)
 F = FULL RADIUS (2 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS					
UPTO 6.40mm	-	±0.20	UPTO 32.0mm	-	±0.38
UPTO 10.0mm	-	±0.23	UPTO 50.0mm	-	±0.46
UPTO 12.0mm	-	±0.25	UPTO 60.0mm	-	±0.53
UPTO 16.0mm	-	±0.28	UPTO 80.0mm	-	±0.69
UPTO 25.0mm	-	±0.30	UPTO 100.0mm	-	±0.75

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED			
PARTY'S NAME		INTERNATIONAL RUBBER TECH PVT. LTD., CHENNAI	
PARTY'S DRAWING No.		AS PER AUTOCAD DRAWING	
ALLOY & TEMPER		6061 T6	
DESCRIPTION		INDUSTRIAL SECTION	
DRAWN	NAME	DATE	
CHECKED	SRIYATHSA	20-07-2013	
APPROVED	S.S.GARG	30-07-2013	
SCALE	1:1		
AREA	mm ²	10314.834	
PERIMETER	mm.	972.804	
WEIGHT	kg/m	27.850	
DRAWING No.	SECTION No.		
P-12907	-		
S3815	S3815		
28197	28197		