



P-16788
S5282
28421

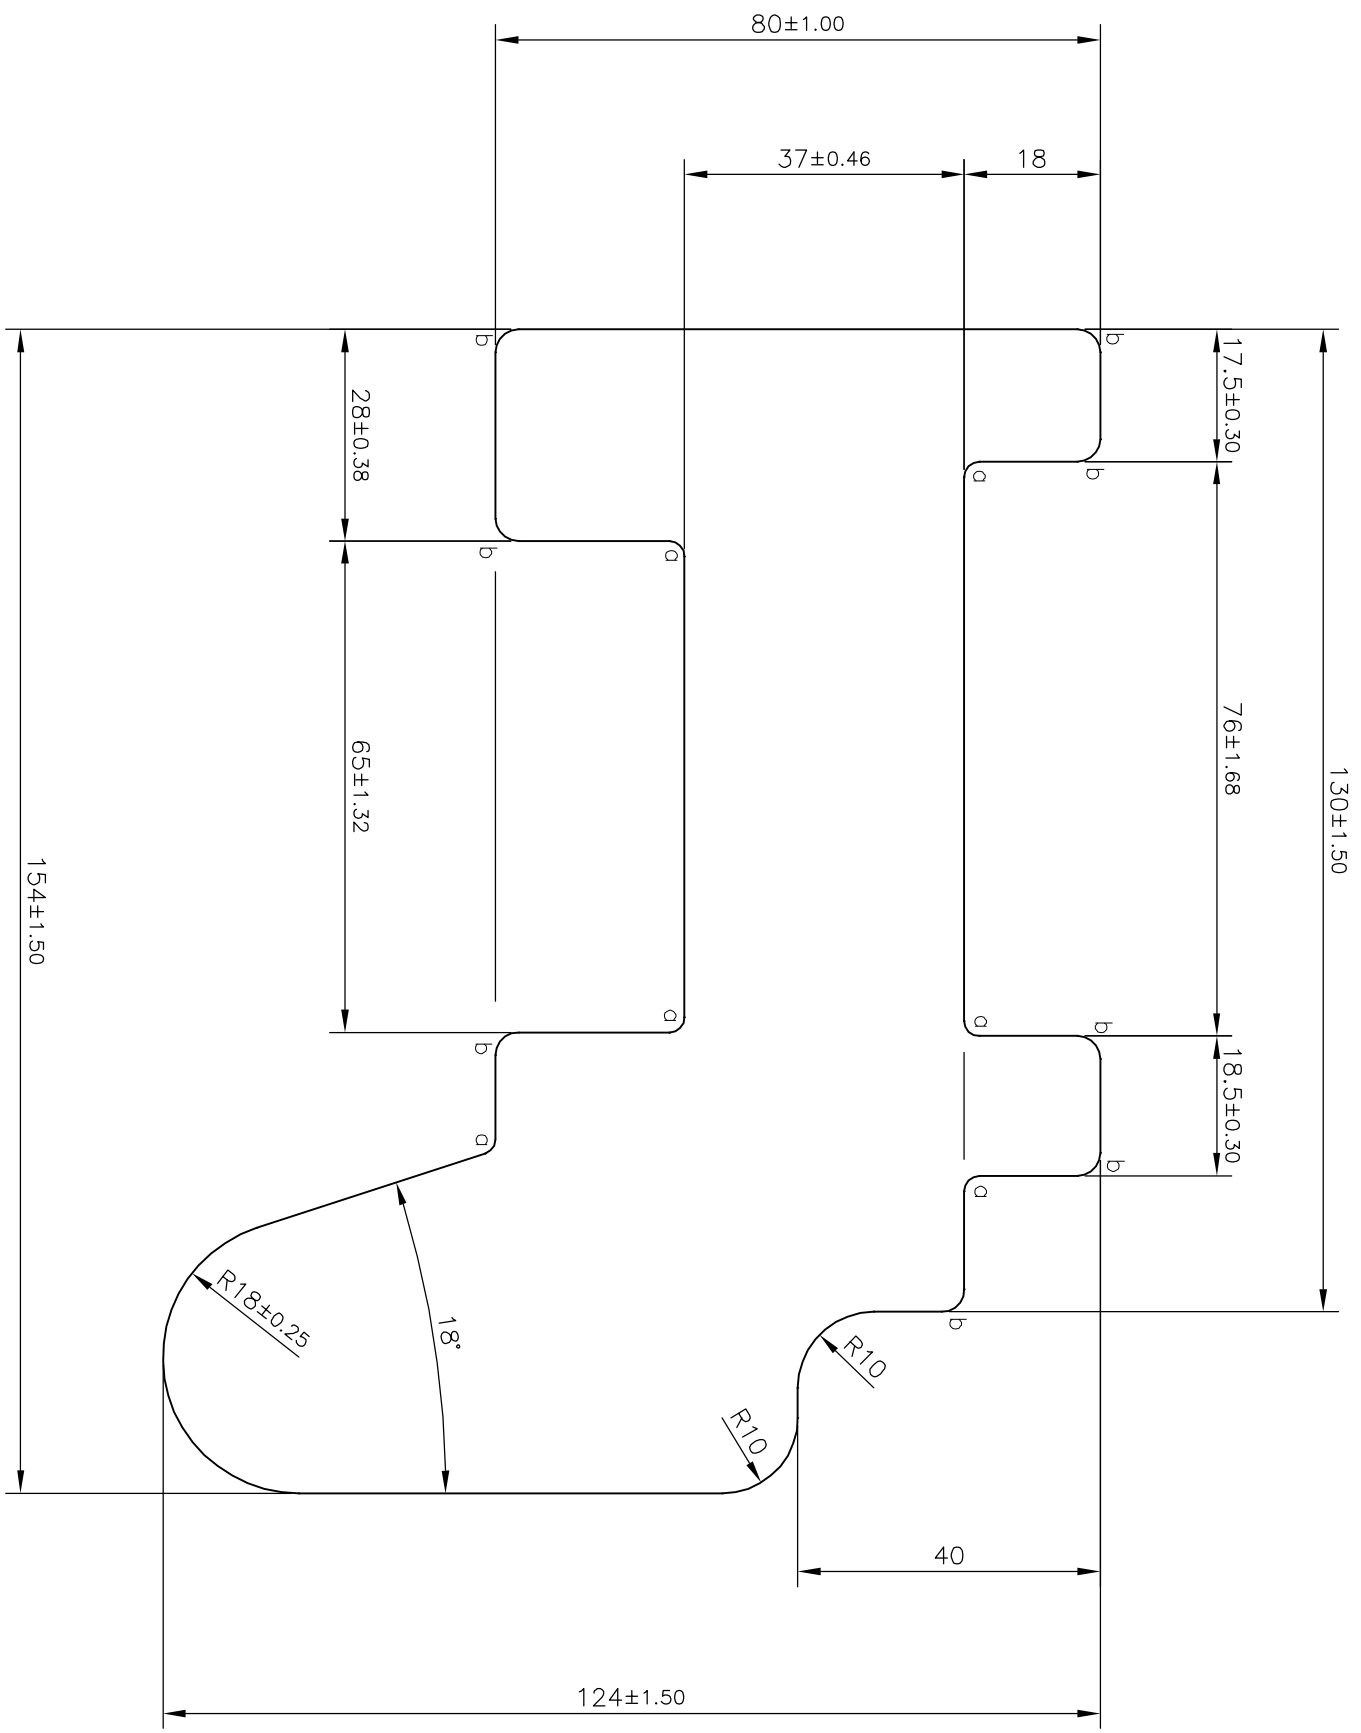

d : 2.00 mm RADIUS (6 PLACES)  
b : 3.00 mm RADIUS (8 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS								
UPTO 20.0mm	-	±0.30	UPTO 80.0mm	-	±0.70	UPTO 180.0mm	-	±1.27
UPTO 30.0mm	-	±0.38	UPTO 100.0mm	-	±0.80	UPTO 200.0mm	-	±1.40
UPTO 40.0mm	-	±0.45	UPTO 120.0mm	-	±0.90	UPTO 225.0mm	-	±1.52
UPTO 50.0mm	-	±0.52	UPTO 140.0mm	-	±1.00			
UPTO 60.0mm	-	±0.60	UPTO 160.0mm	-	±1.14			

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 UNLESS OTHERWISE SPECIFIED			
PARTY'S NAME		KRISHNA ENTERPRISES, KANPUR	
PARTY'S DRAWING No.		AS PER DRAWING	
ALLOY & TEMPER		6061 T6	
DESCRIPTION		MISC. SECTION	
DRAWN	KIRAN	NAME	DATE
CHECKED			28-01-2017
APPROVED	B.NATARAU		01-02-2017
SCALE		1:1	
AREA mm <sup>2</sup>		9612.822	
PERIMETER mm.		595.136	
WEIGHT kg/m		25.955	
DRAWING No.		SECTION No.	
P-16788		-	
S5282		S5282	
28421		28421	