


P-20996-1

28511



- | | |
|------------------------------------|---|
| 1 TENSILE STRENGTH:-215MPa Minimum | 7 ALL DETAIL AS PER DELIVERY SPECIFICATION No:-415001-eng |
| 2 YIELD POINT:-160MPa Minimum | 8 SURFACE ROUGHNESS VALUE AS Rz 25 um |
| 3 FRACTURE ELONGATION:-12% Minimum | 9 ORDER LENGTH 5 Mtr± 5mm |
| 4 STRAIGHTNESS=0.5mm/M | |
| 5. FLATNESS =1.0mm/M | |
| 6 TWIST=0.5mm/M | |

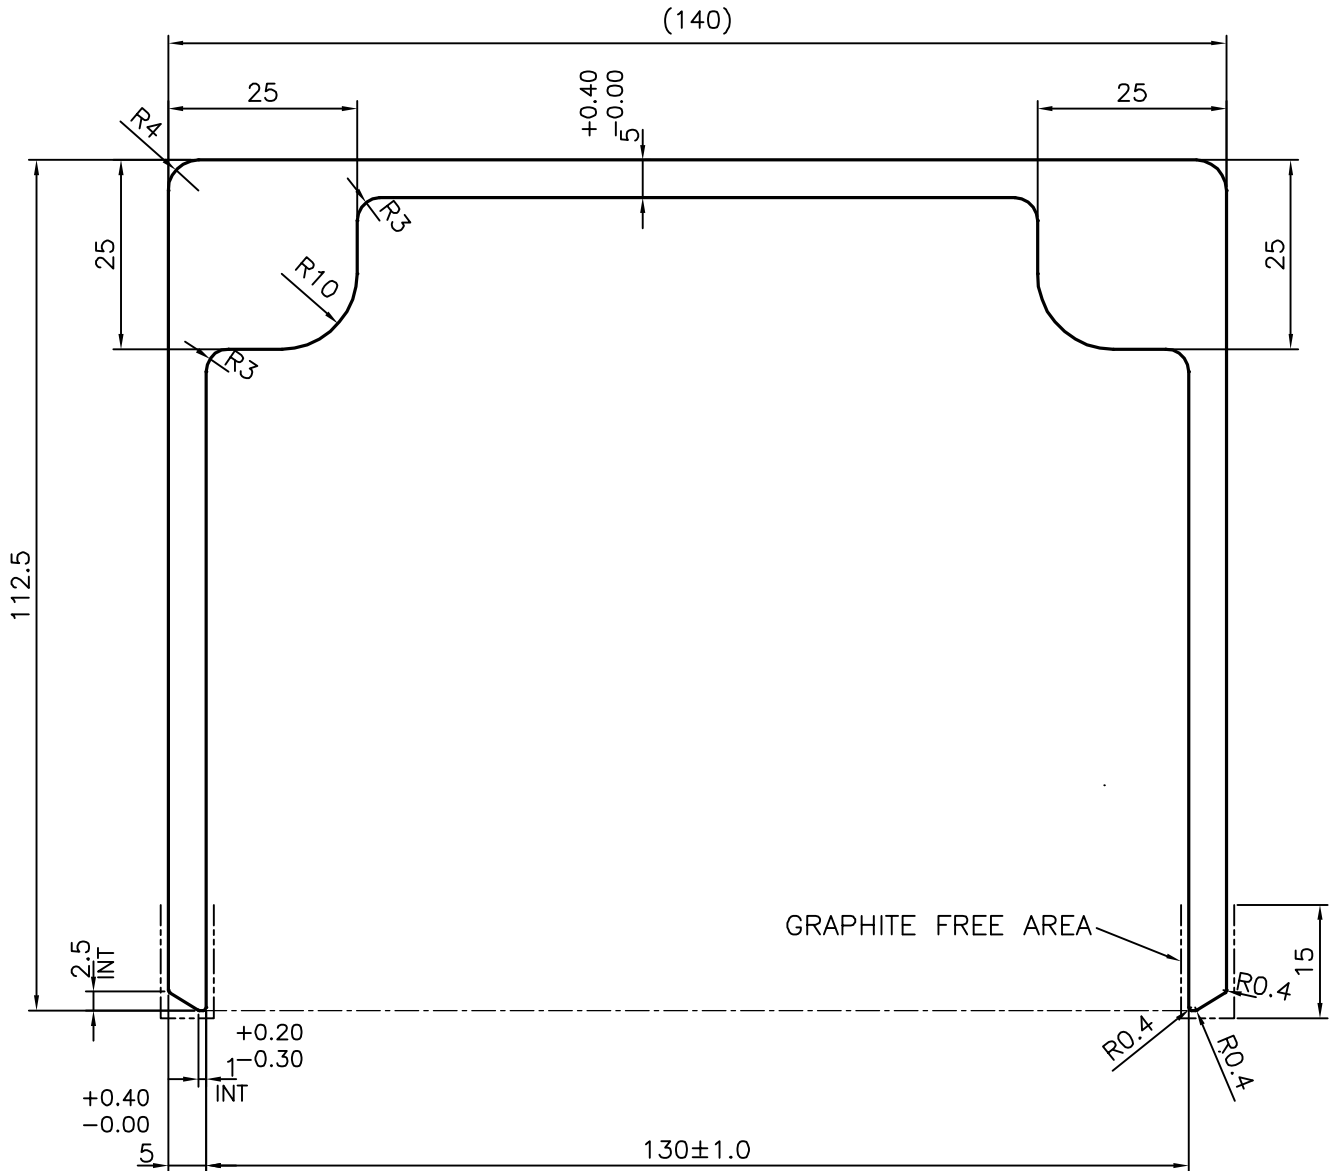

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	29-05-2020
CHECKED		
APPROVED	B.NATARAJA	28-07-2020
SCALE		1:1
AREA mm ²		2522.852
PERIMETER mm.		698.833
WEIGHT kg/m		6.812
DRAWING No.	SECTION No.	
P-20996-1	-	
28511	28511	

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	AKG INDIA PVT. LTD., COIMBATORE
PARTY'S DRAWING No.	84206690000
ALLOY & TEMPER	6060 T66
DESCRIPTION	CHANNEL-MISC.