



P-20920

28520

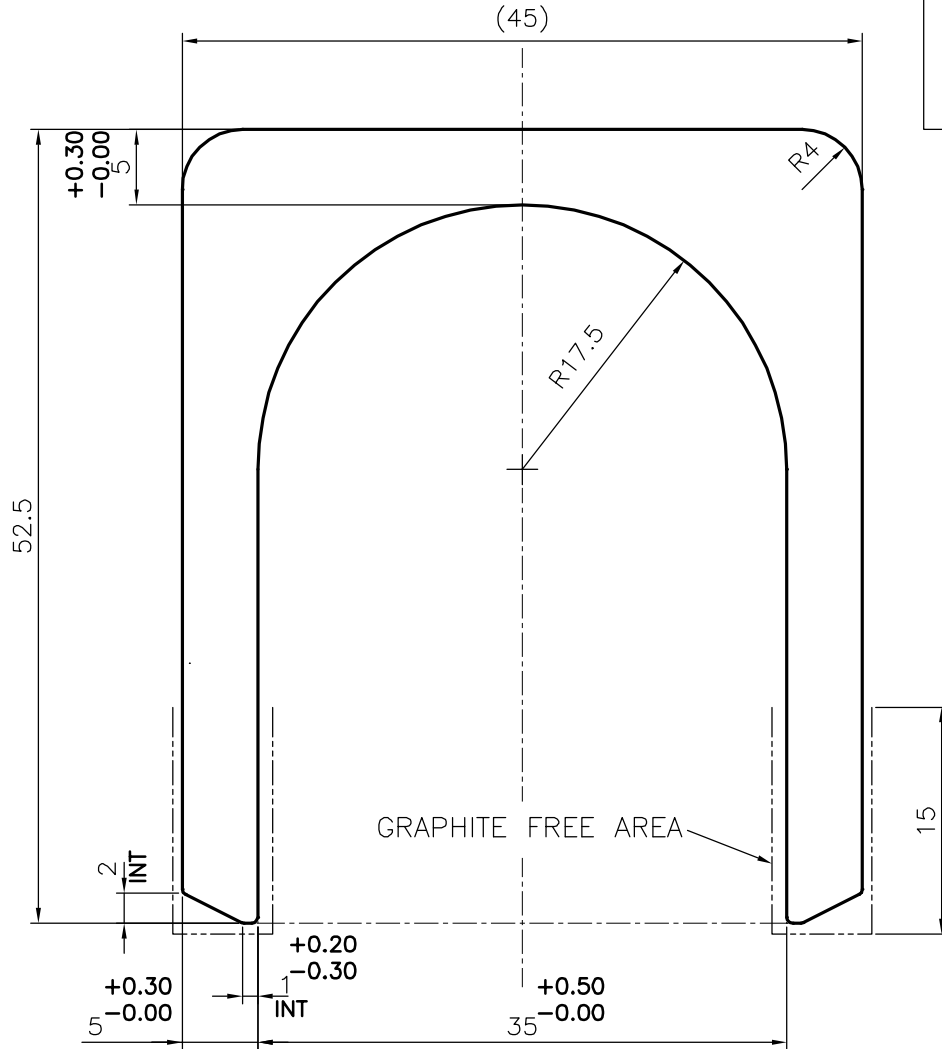

- 1 TENSILE STRENGTH:-215MPa Minimum
- 2 YIELD POINT:-160MPa Minimum
- 3 FRACTURE ELONGATION:-12% Minimum
- 4 STRAIGHTNESS=0.5mm/M
- 5. FLATNESS =1.0mm/M
- 6 TWIST=0.5mm/M
- 7 ALL DETAIL AS PER DELIVERY SPECIFICATION No:-415001-eng
- 8 SURFACE ROUGHNESS VALUE AS Rz 25 um
- 9 ORDER LENGTH 5 Mtr± 5mm

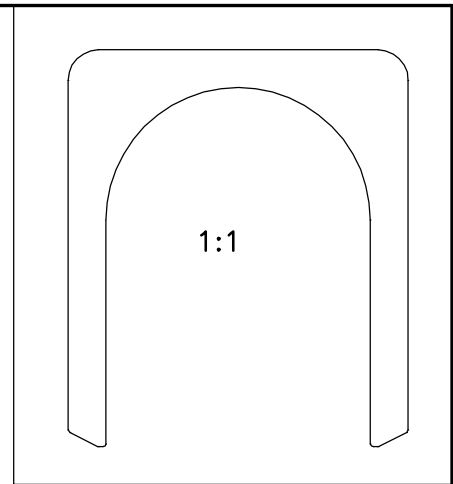

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	11-04-2020
CHECKED		
APPROVED	J.N.RAI	05-09-2020
SCALE		2:1
AREA mm ²		816.486
PERIMETER mm.		268.035
WEIGHT kg/m		2.205
DRAWING No.	SECTION No.	
P-20920	-	
28520	28520	

- 1. ALL DIMENSIONS ARE IN mm.
- 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	AKG INDIA PVT. LTD., COIMBATORE
PARTY'S DRAWING No.	8420.001.0000
ALLOY & TEMPER	6060 T66
DESCRIPTION	CHANNEL-MISC.