



P-18458-2

S6237

28583

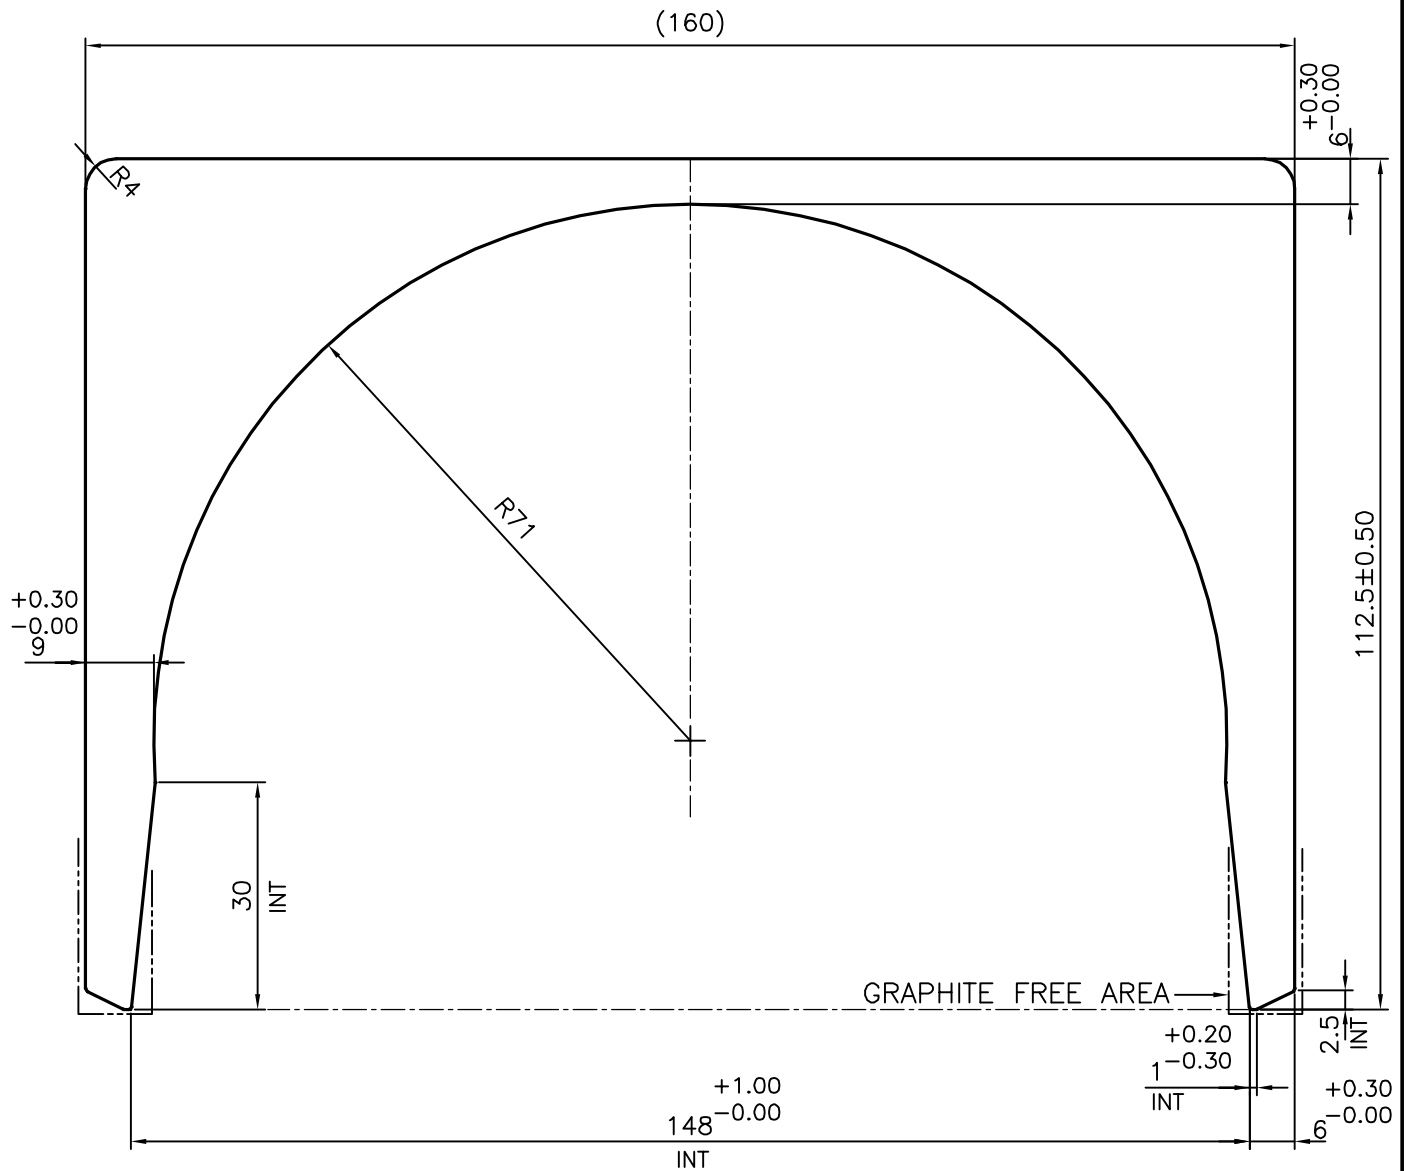

- 1 TENSILE STRENGTH:-215MPa Minimum
- 2 YIELD POINT:-160MPa Minimum
- 3 FRACTURE ELONGATION:-12% Minimum
- 4 STRAIGHTNESS=0.5mm/M
- 5. FLATNESS =1.0mm/M
- 6 TWIST=0.5mm/M
- 7 ALL DETAIL AS PER DELIVERY SPECIFICATION No:-415001-eng
- 8 SURFACE ROUGHNESS VALUE AS Rz 25 um
- 9 ORDER LENGTH 5 Mtr± 5mm

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)		NAME	DATE
		DRAWN	J.P.KAUSHIK	15-04-2019
		CHECKED		
		APPROVED	B.NATARAJA	02-05-2019
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED		SCALE	1:1	
		AREA mm <sup>2</sup>	4938.355	
		PERIMETER mm.	683.777	
		WEIGHT kg/m	13.334	
PARTY'S NAME	AKG INDIA PVT. LTD., COIMBATORE	DRAWING No.	SECTION No.	
PARTY'S DRAWING No.	8420.708.0000	P-18458-2	-	
ALLOY & TEMPER	6060 T66	S6237	S6237	
DESCRIPTION	CHANNEL-MISC.	28583	28583	