




S351
7957
28612

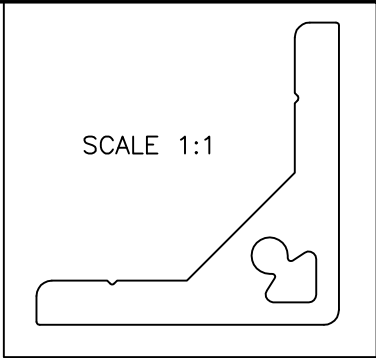

V = VEE GROOVE (2 PLACES)
R = REDII 2.00 (3 PLACES)
G = REDII 1.00 (3 PLACES)

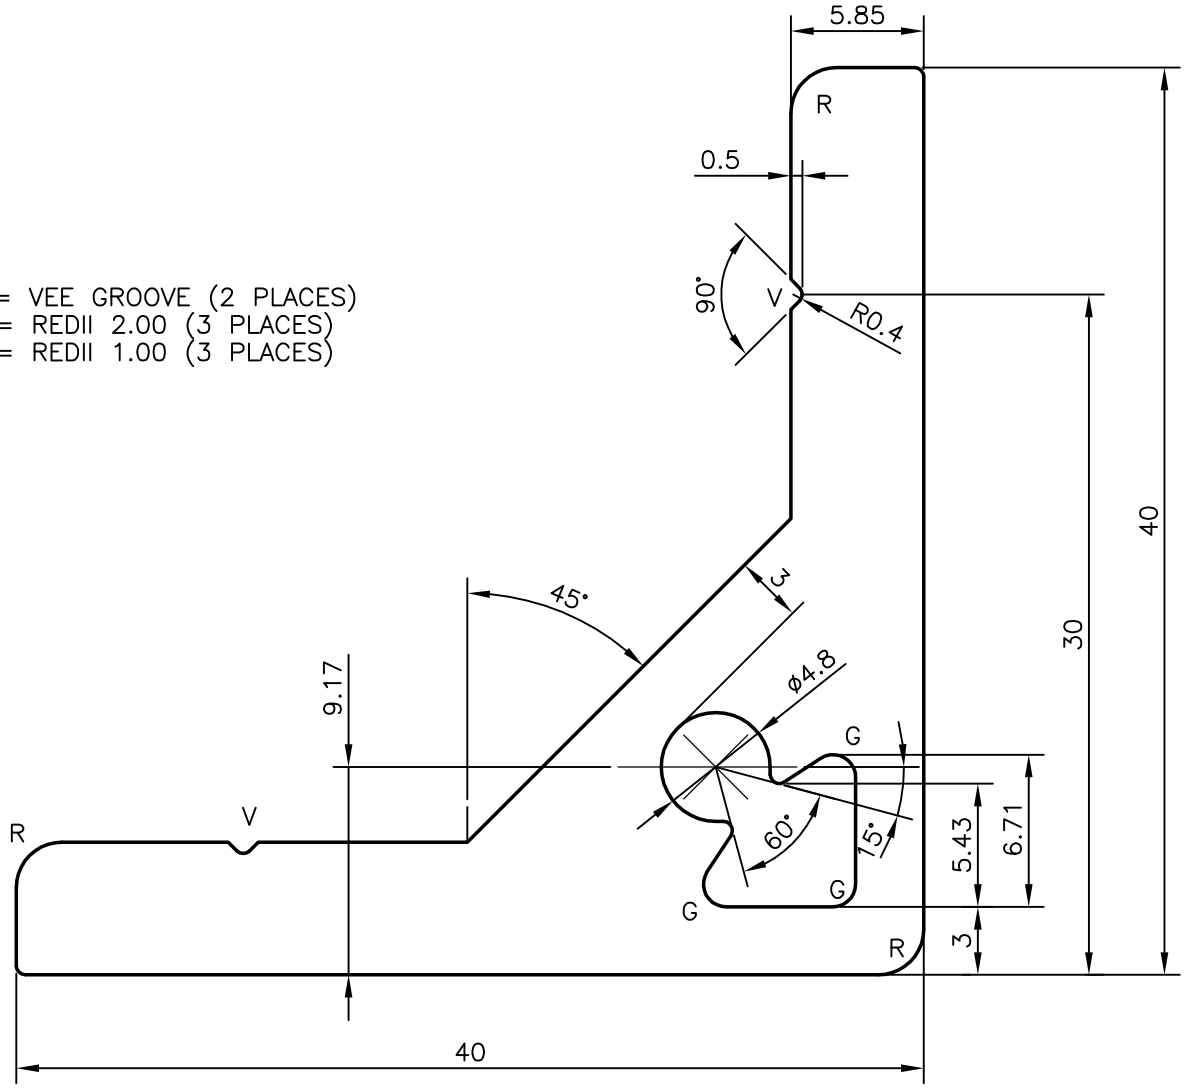

EXTRUSION SHOULD BE FREE FROM SCRATCHES & BURRS
OUT SIDE SURFACE TO BE SMOOTH & FREE FROM DIE LINES

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	NAME	DATE
		DRAWN	RAGHAVENDRA 16-12-2006
		CHECKED	
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED		APPROVED	
PARTY'S NAME		SCALE	
		3:1	
PARTY'S DRAWING No.		AREA mm ²	
		480.894	
ALLOY & TEMPER		PERIMETER mm.	
		149.48	
DESCRIPTION		WEIGHT kg/m	
		1.298	
INDUSTRIAL MISC. SECTION		DRAWING No.	SECTION No.
		S351	S351
		7957	7957
		28612	28612