



P-12914
S3814
29607

EXPOSED SURFACE




SCALE: - 1:1

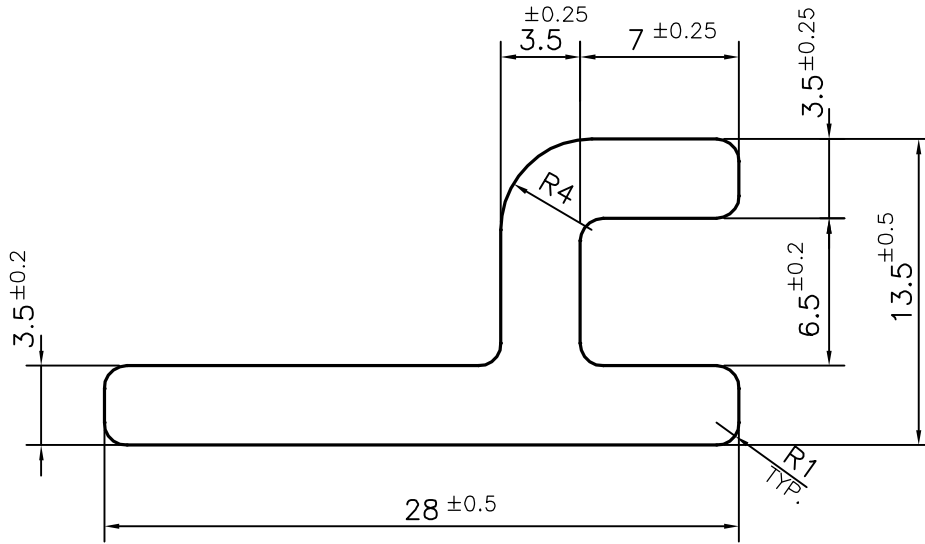

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.5mm/M

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	DRAWN	NAME	DATE
		CHECKED	PARVESH	23-07-2013
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 1.00 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED		APPROVED	S.S.GARG	30-07-2013
		SCALE		3:1
PARTY'S NAME ADVANCED PRECISION, BANGALORE		AREA mm ²		153.423
		PERIMETER mm.		91.42
PARTY'S DRAWING No. 1097660		WEIGHT kg/m		0.414
		DRAWING No.	SECTION No.	
ALLOY & TEMPER 6063 T6		P-12914	-	
		S3814	S3814	
DESCRIPTION GUIDE RAIL SECTION		29607	29607	