


P-16478

S5166


29683

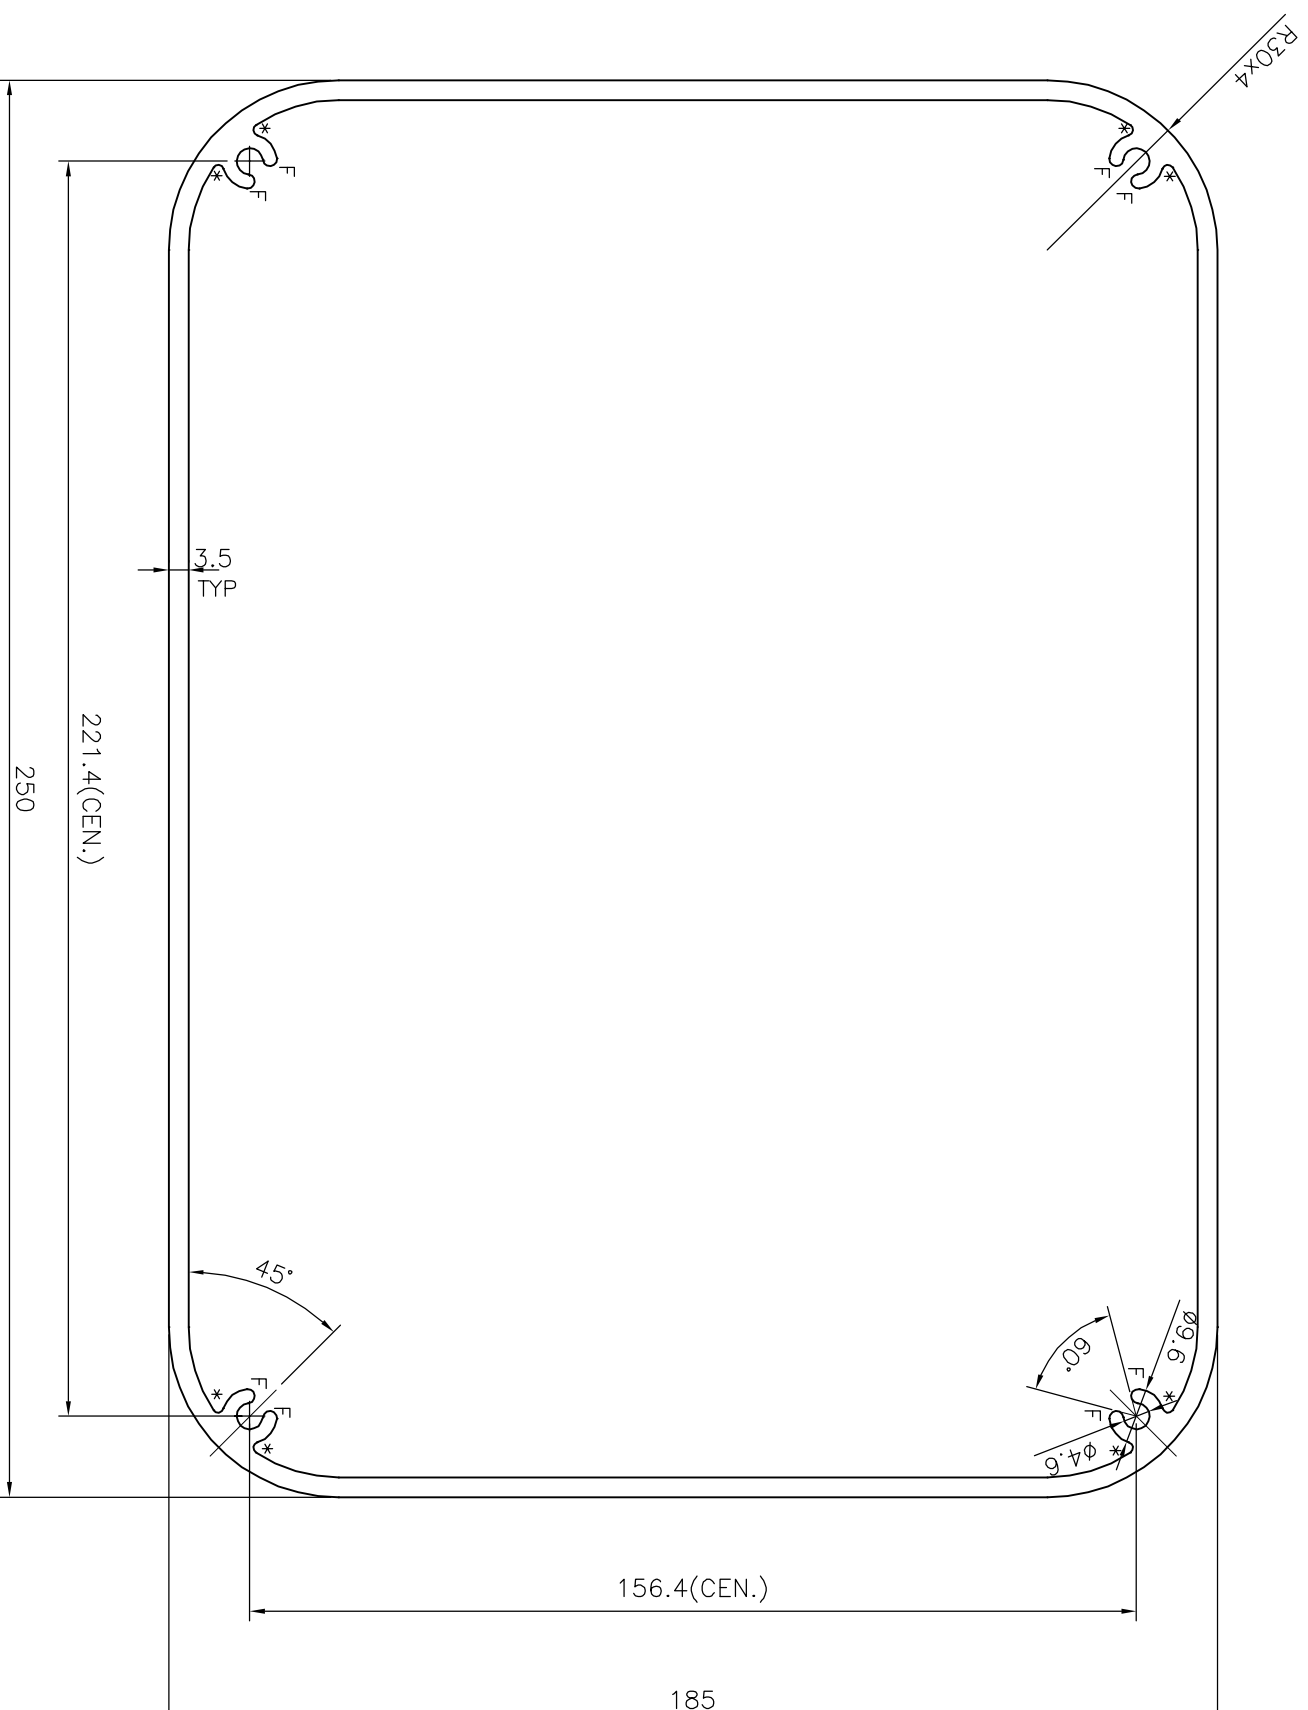

* = 1.0 RADIUS (8 PLACES)
F = FULL RADIUS (8 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY		JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		DRAWN	J.P.KAUSHIK	DATE	24-10-2016
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.50 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED				CHECKED			
PARTY'S NAME		ALUFIT (INDIA) PRIVATE LIMITED, BANGALORE		APPROVED	B.NATARAU		07-11-2016
PARTY'S DRAWING No.		AS PER DRAWING		SCALE			0.75:1
ALLOY & TEMPER		6063 T6		AREA mm ²			3010.972
DESCRIPTION		MISC. SECTION		PERIMETER mm.			818.496
				WEIGHT kg/m			8.130
				DRAWING No.			SECTION No.
				P-16478			-
				S5166			S5166
				29683			29683