


P-21169-1


29710

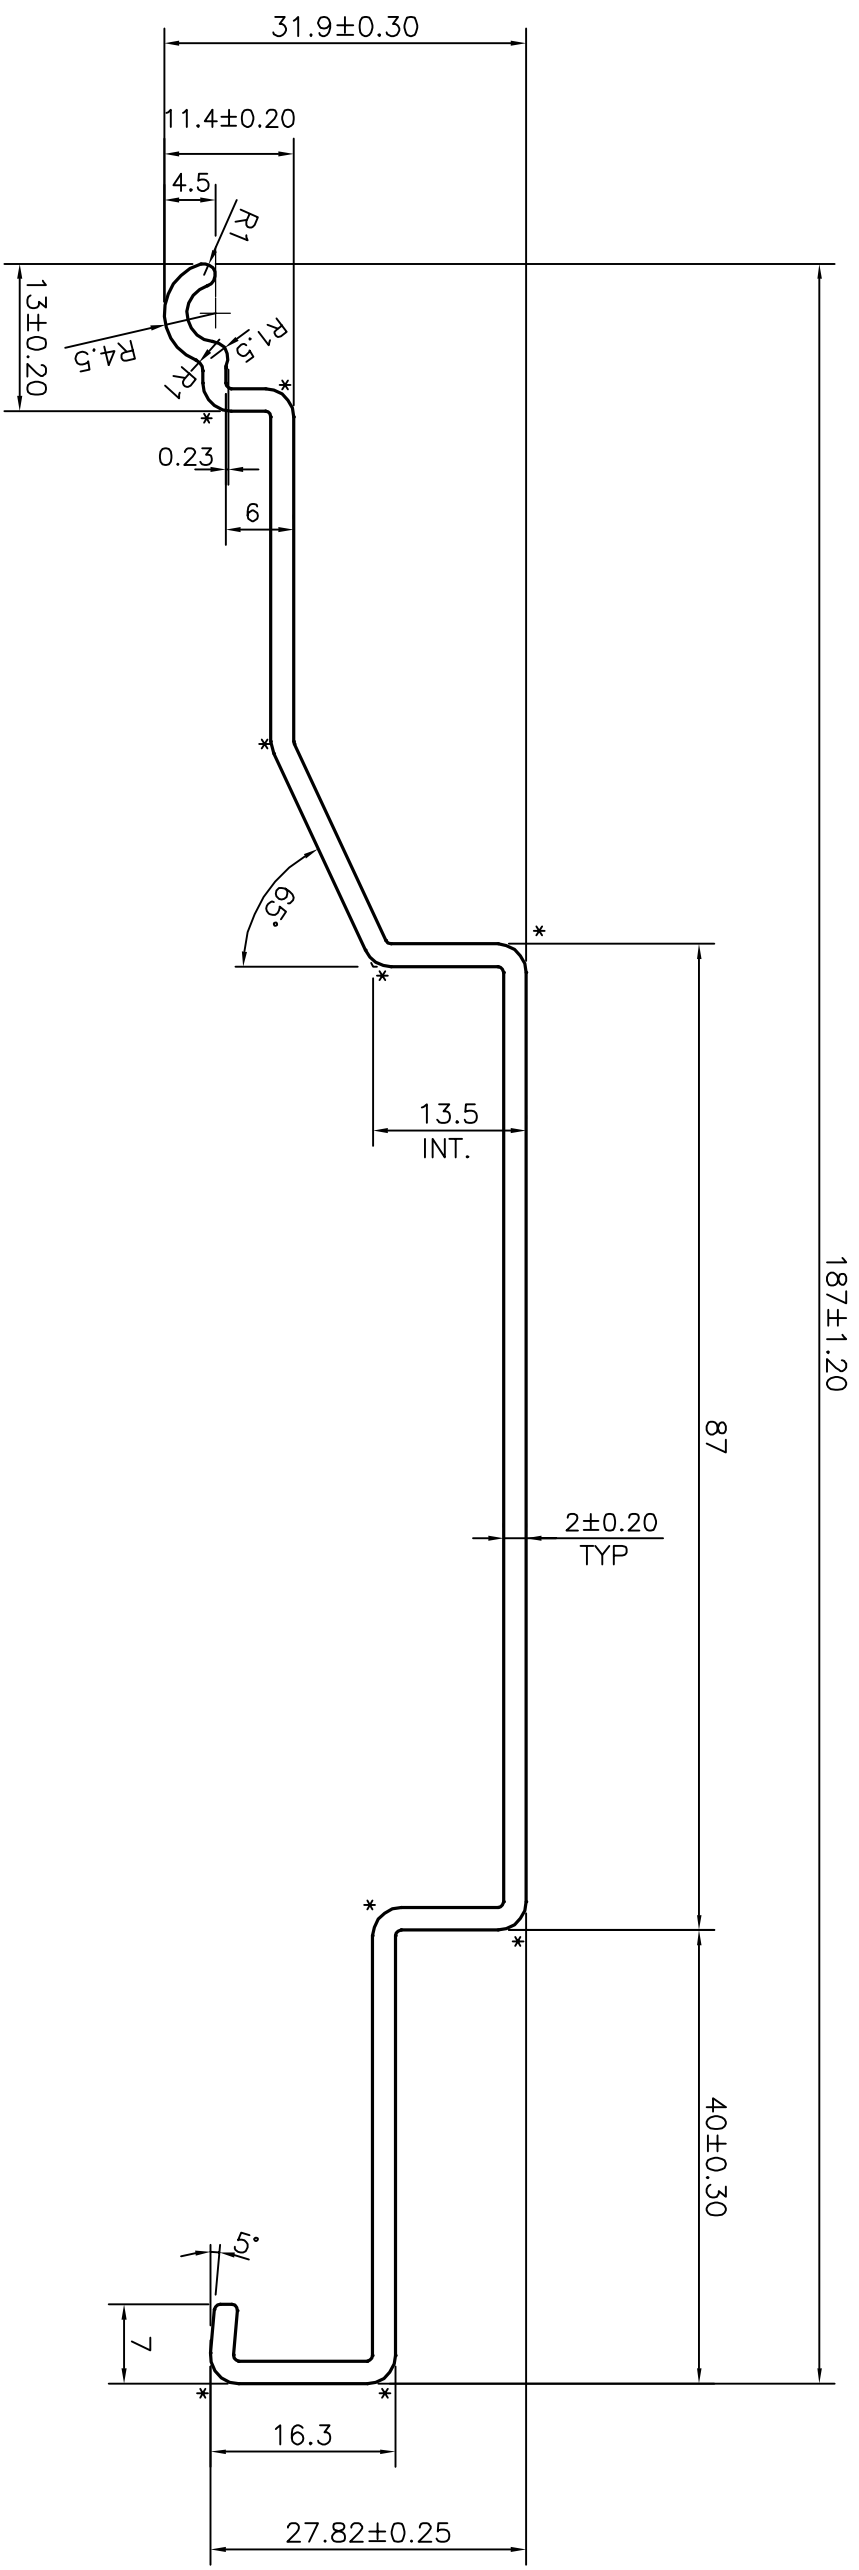

1. STRAIGHTNESS=0.5mm/173.5 mm
  2. STRAIGHTNESS=0.3mm/69 mm
  3. TWIST / BEND=1.7mm/M
  4. ANGULARITY= ±1°
  5. FLATNESS =0.7 mm
- UNSPECIFIED RADIUS 0.5 mm  
 \* = 2.5 RADIUS (9 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b>	
	<i>BANGALORE-560073 (INDIA)</i>	

1. ALL DIMENSIONS ARE IN mm.	SCALE	1.5:1
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.	AREA mm <sup>2</sup>	471.438
3. TOLERANCES WILL BE AS PER BS:EN-12020-2 UNLESS OTHERWISE SPECIFIED	PERIMETER mm.	474.117
	WEIGHT kg/m	1.273

PARTY'S NAME	RELIANCE INDUSTRIES LTD., MUMBAI	DRAWING No.	P-21169-1	SECTION No.	
PARTY'S DRAWING No.	525-39050-01		29710		
ALLOY & TEMPER	6063 T5				
DESCRIPTION	DUMMING ASSEMBLY BODY SECTION				

