
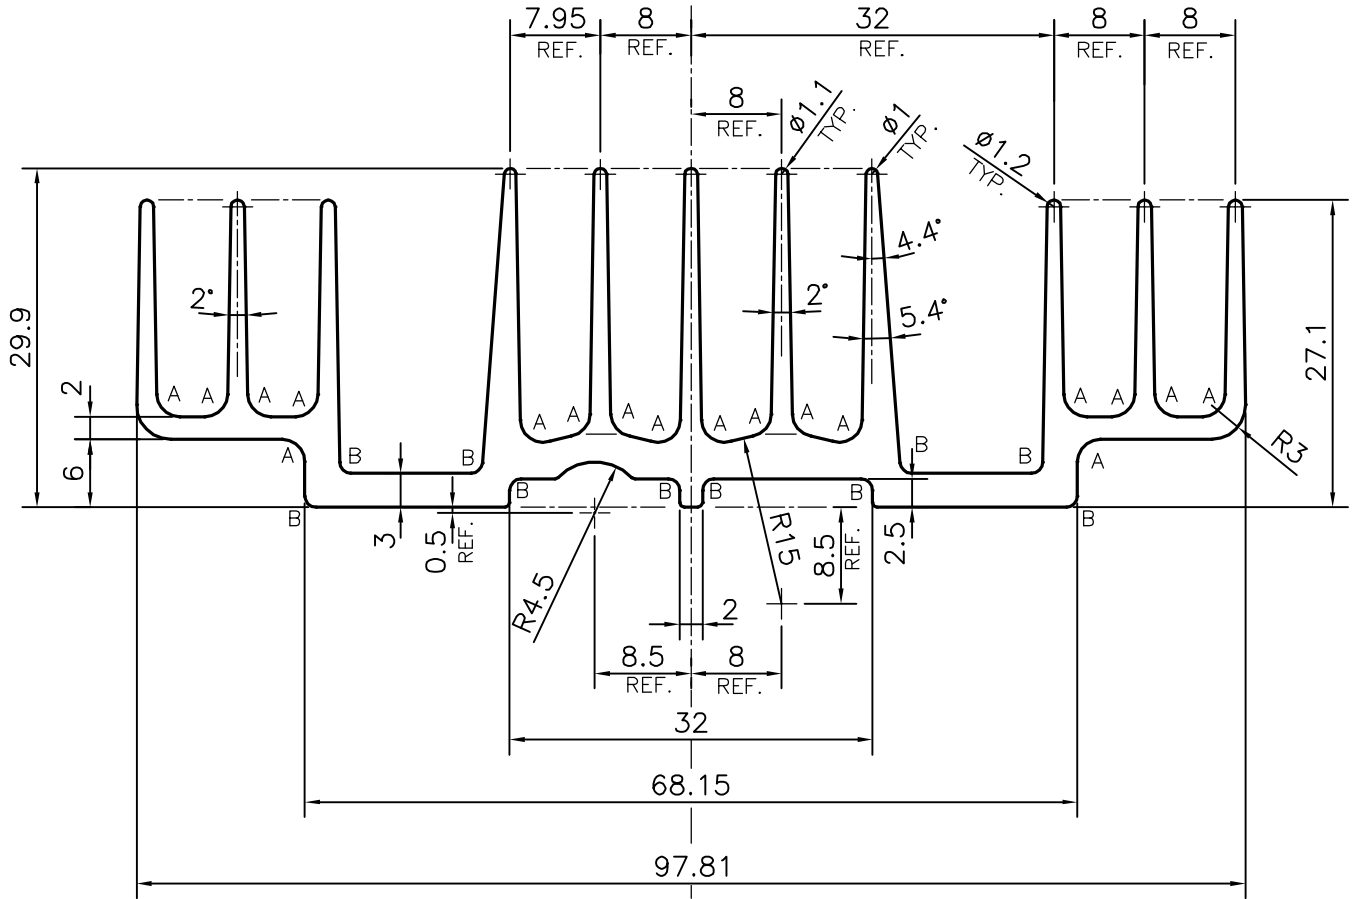


P-12963

S3830


33548

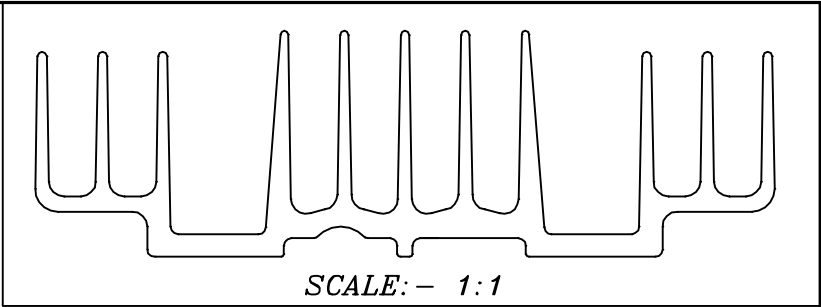

A = RADIUS 2 mm. (18 PLACES)  
 B = RADIUS 1 mm. (10 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)	DRAWN	NAME	DATE
		CHECKED	PARVESH	16-08-2013
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED		APPROVED	S.S.GARG	21-08-2013
		SCALE		1.5:1
PARTY'S NAME		AREA mm <sup>2</sup>		712.72
		PERIMETER mm.		668.234
PARTY'S DRAWING No.		WEIGHT kg/m		1.924
		DRAWING No.	SECTION No.	
ALLOY & TEMPER		P-12963		-
		S3830		S3830
DESCRIPTION		33548		33548
BILVA TECHNOLOGIES PVT. LTD., BANGALORE				
Y-2605				
6060 T6				
HEAT SINK SECTION				