


P-17589  
S5563  
33645

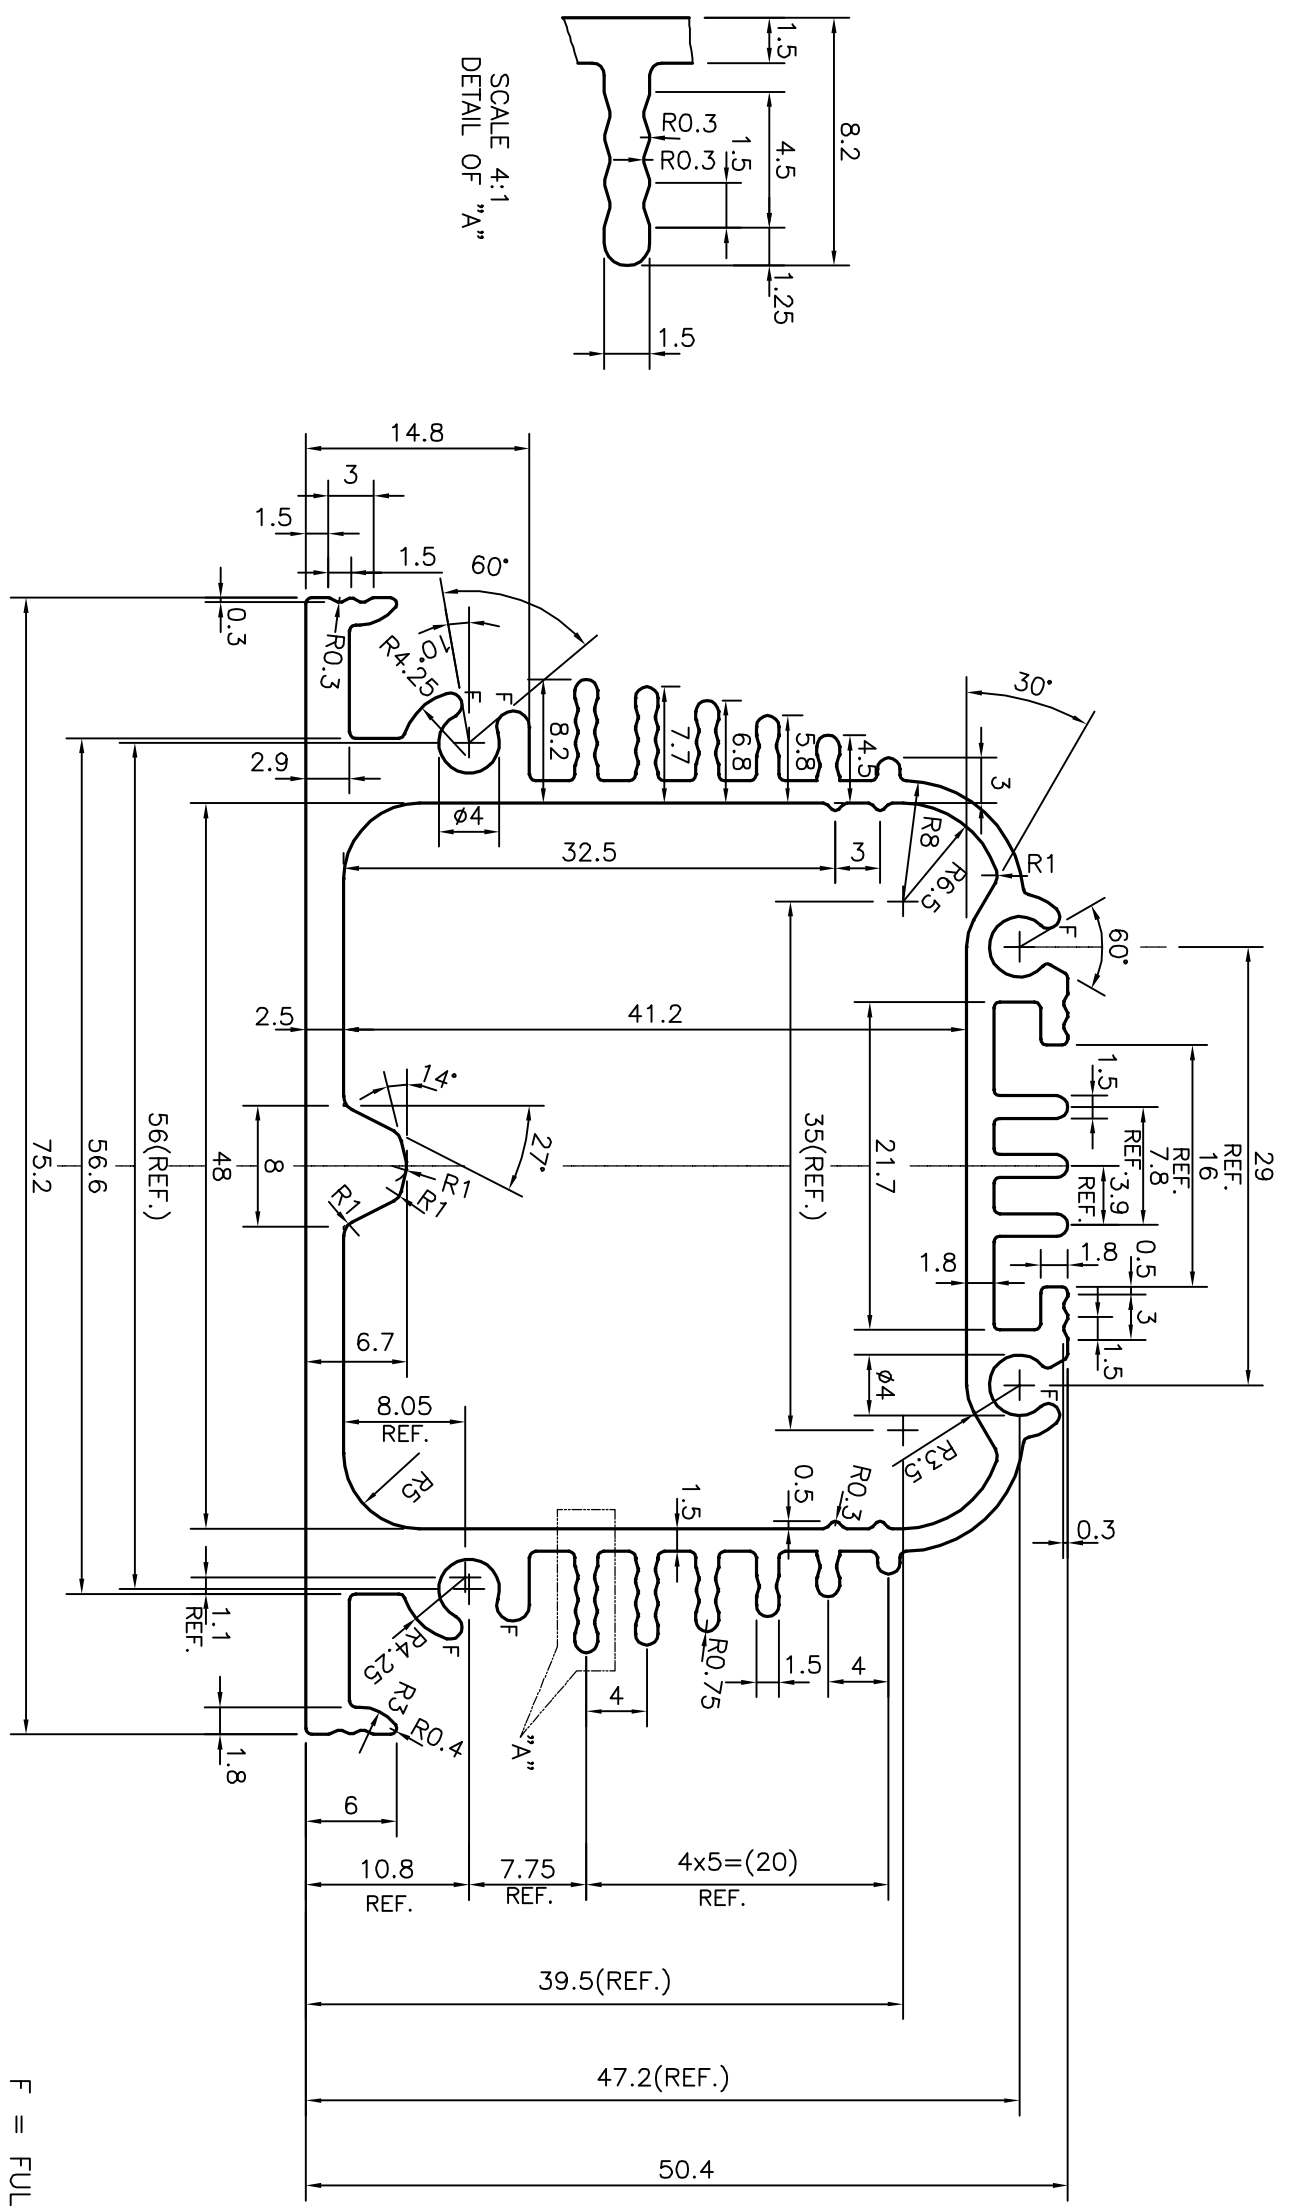

F = FULL RADIUS ( 6 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH

**JINDAL**  
SYMBOL OF QUALITY  
AN ISO 9001 COMPANY  
**JINDAL ALUMINIUM LTD.**  
BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.  
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.  
3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	MULTI LIGHTING CONTROLS PVT. LTD., NANI DAMAN	SCALE	2:1
PARTY'S DRAWING No.	AS PER SAMPLE	AREA mm <sup>2</sup>	656.693
ALLOY & TEMPER	6063 T6	PERIMETER mm.	439.287
DESCRIPTION	HEATSINK SECTION	WEIGHT kg/m	1.773
		DRAWING No.	P-17589
		SECTION No.	-
		DRAWING No.	S5563
		SECTION No.	33645

