


P-16928-1
S5393
35164

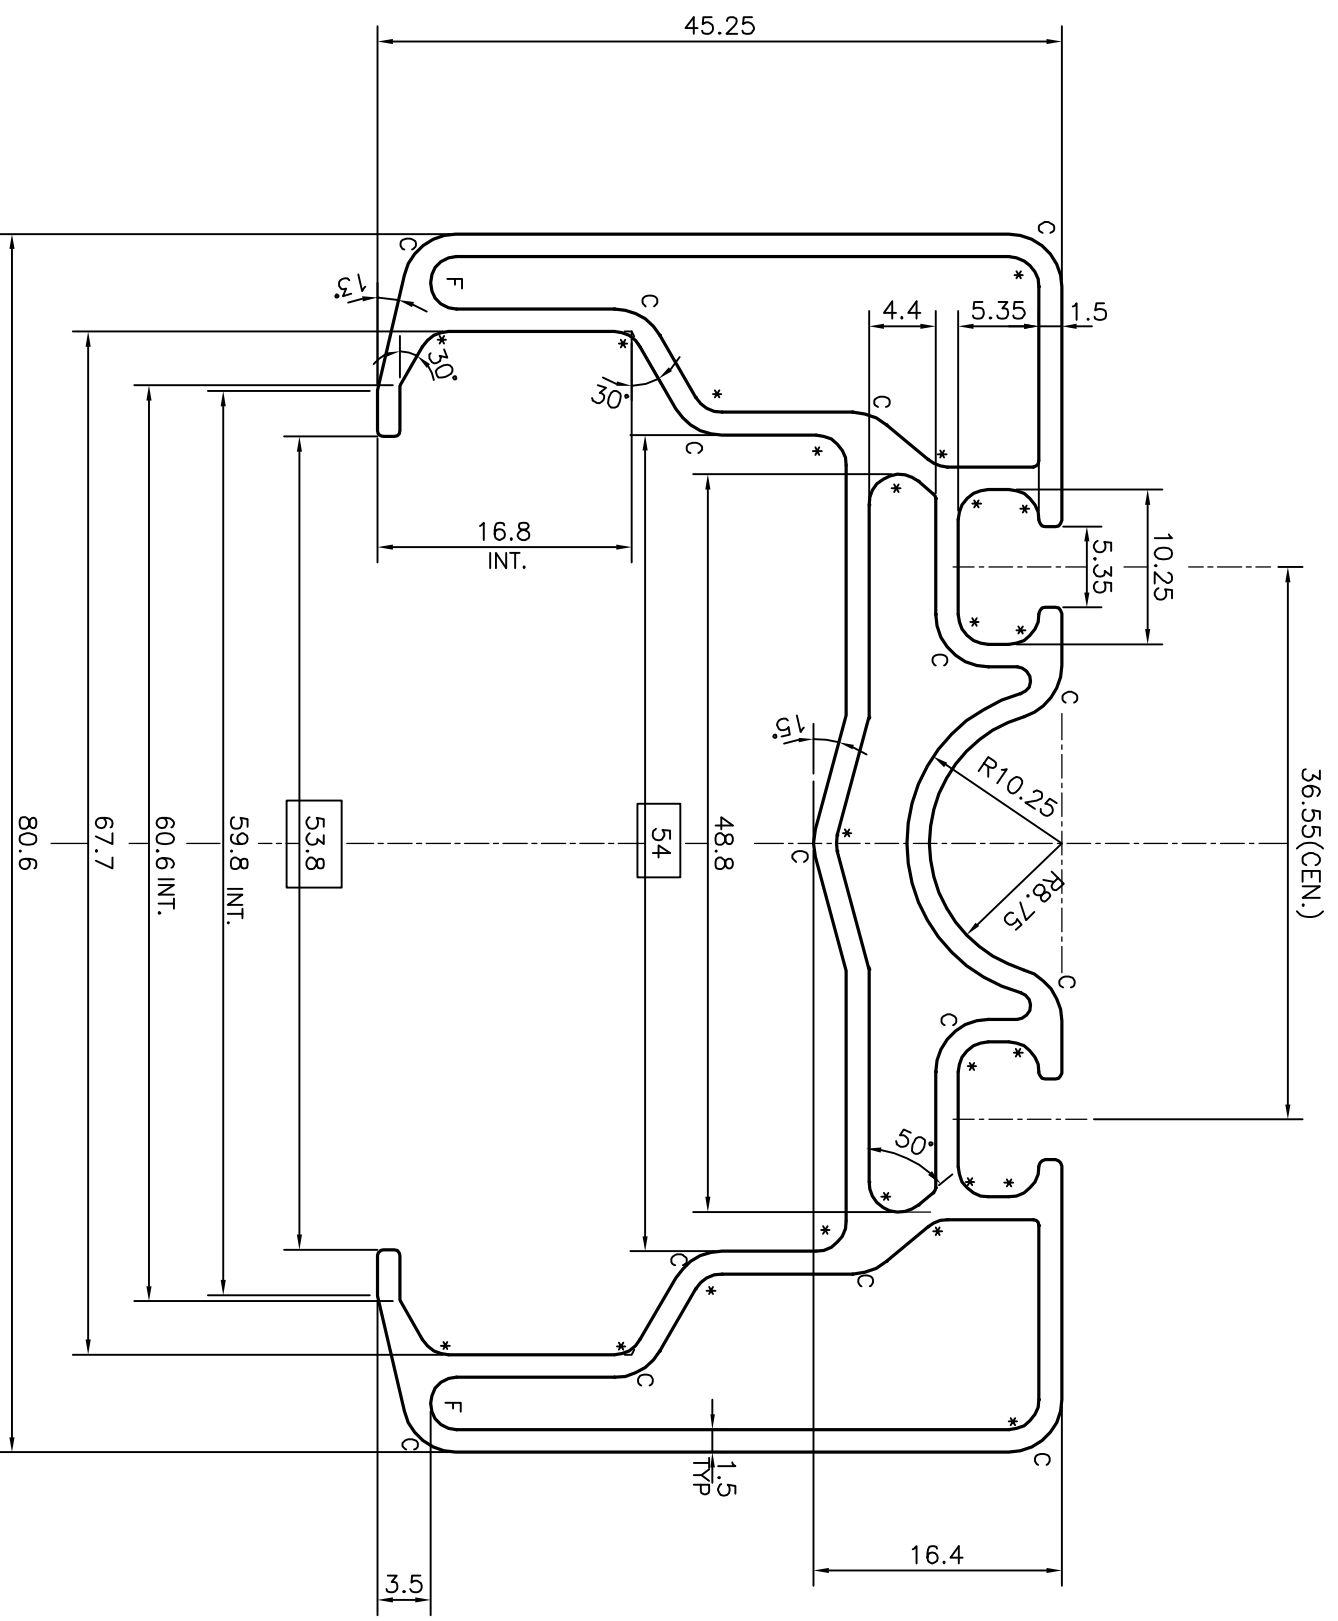

= CRITICAL DIMENSIONS
 C = RADIUS 3.5 mm. (15 PLACES)
 * = RADIUS 2 mm. (23 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH

<p>JINDAL SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>		<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>	
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED</p>			
PARTY'S NAME	TIRTH AGRO TECHNOLOGY PVT. LTD., RAJKOT	SCALE	2:1
PARTY'S DRAWING No.	AS PER AutocAD DRAWING	AREA mm ²	562.336
ALLOY & TEMPER	HE9 WP	PERIMETER mm.	366.833
DESCRIPTION	BOOM SPRAYER HOLDER SECTION	WEIGHT kg/m	1.518
		DRAWING No.	SECTION No.
		P-16928-1	-
		S5393	S5393
		35164	35164

