



P-17400
X2244
35166

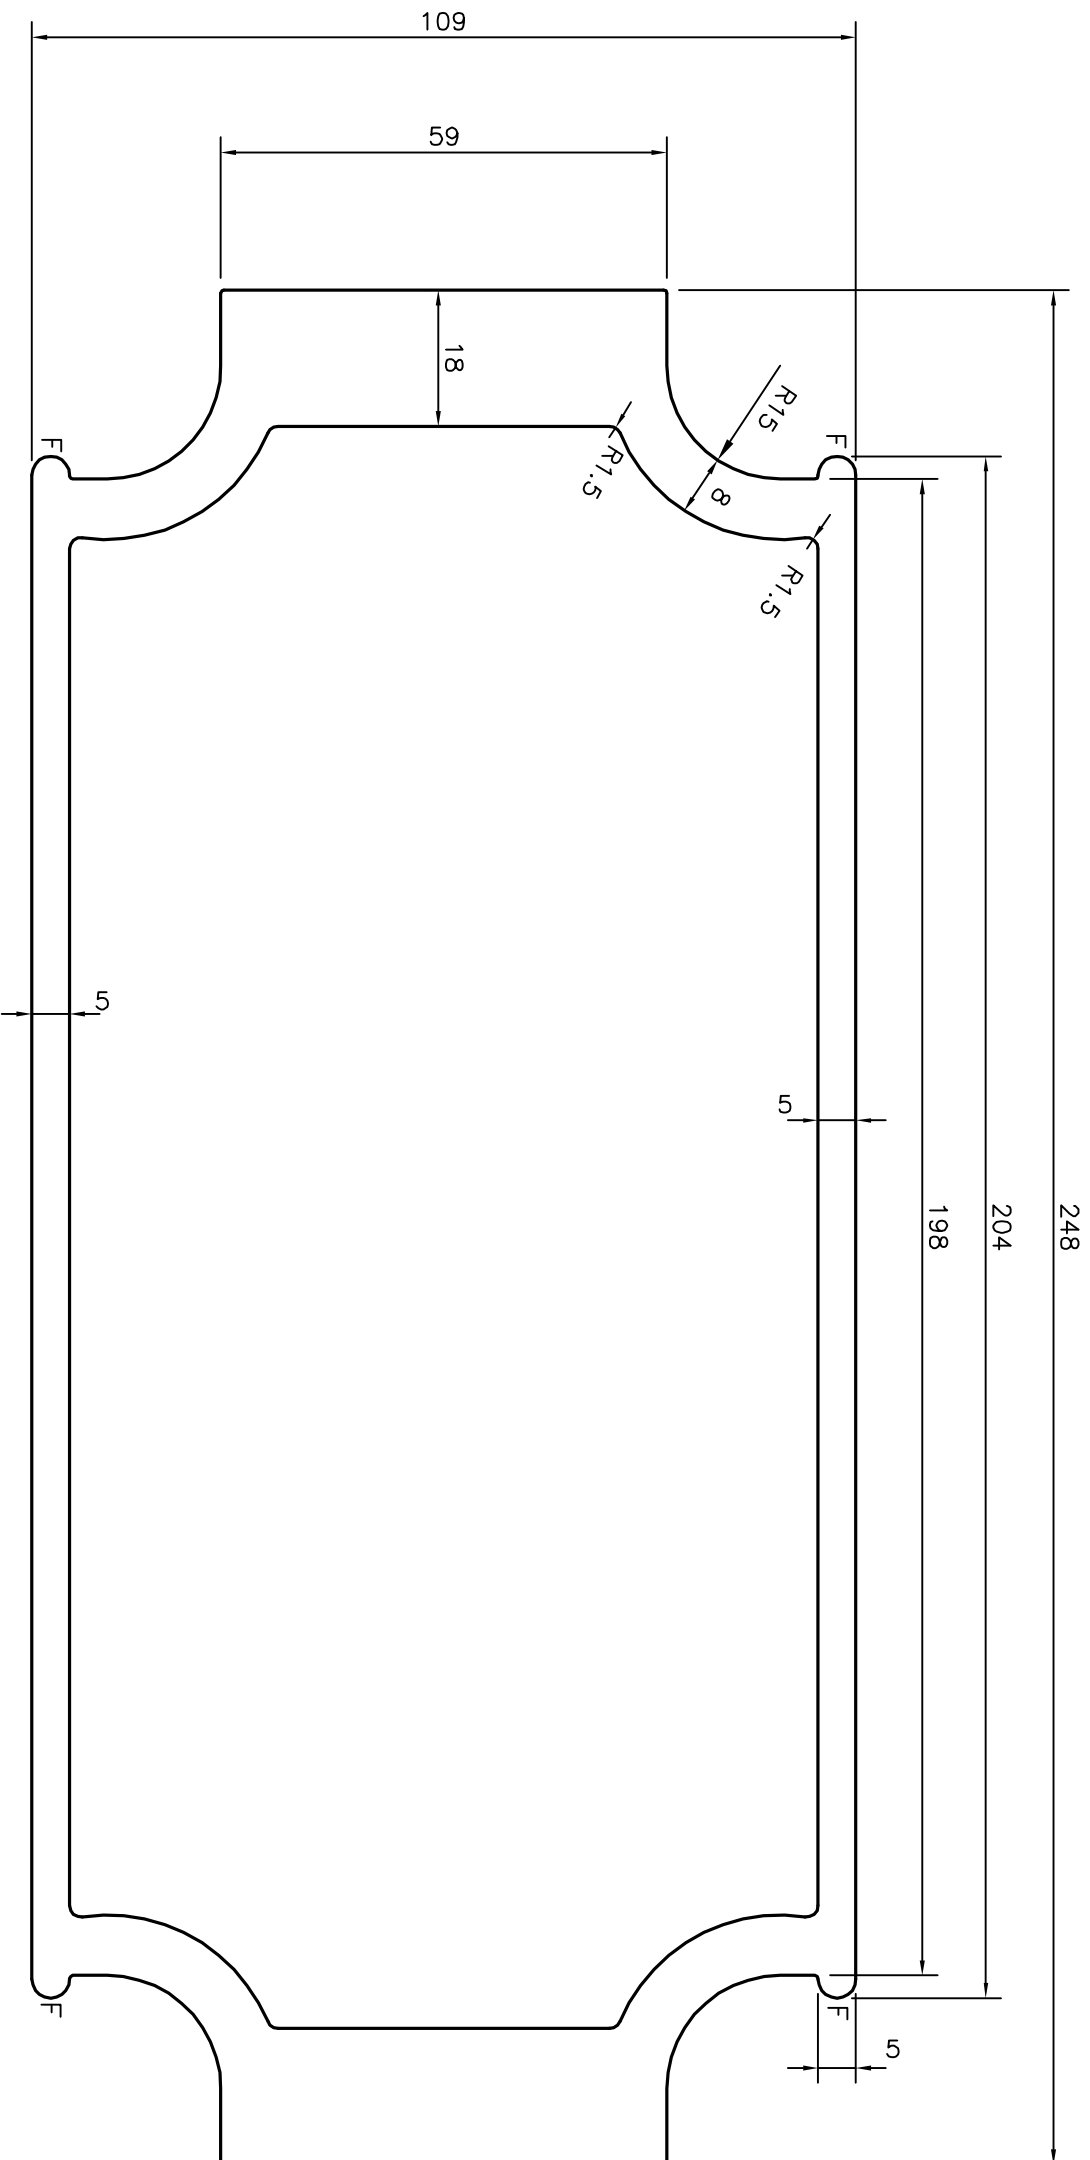


F =FULL RADIUS(8 PLACES)

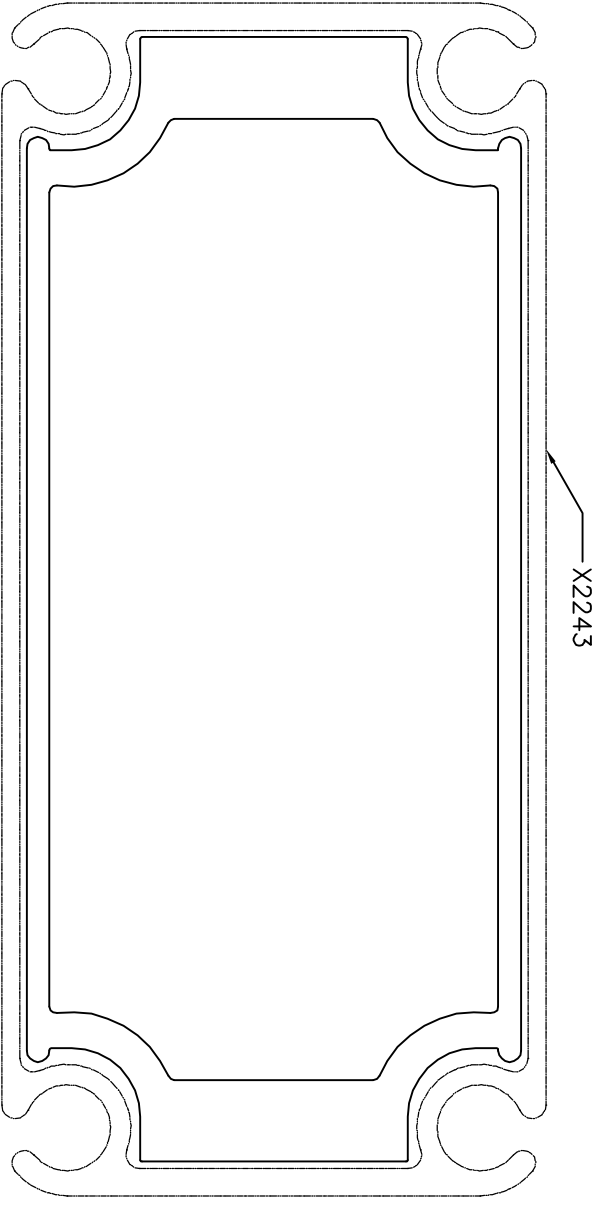

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH



JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED

PARTY'S NAME		FAB INDIA, NEW DELHI	
PARTY'S DRAWING No.		AS PER DRAWING	
ALLOY & TEMPER		6005 T6	
DESCRIPTION		DISPLAY SECTION	
DRAWN		J.P.KAUSHIK	18-08-2017
CHECKED			
APPROVED		B.NATARAJA	26-08-2017
SCALE		1:1	
AREA mm ²		5027.347	
PERIMETER mm.		702.29	
WEIGHT kg/m		13.574	
DRAWING No.		SECTION No.	
P-17400		-	
X2244		X2244	
35166		35166	