


P-12747-2

S3757


35864

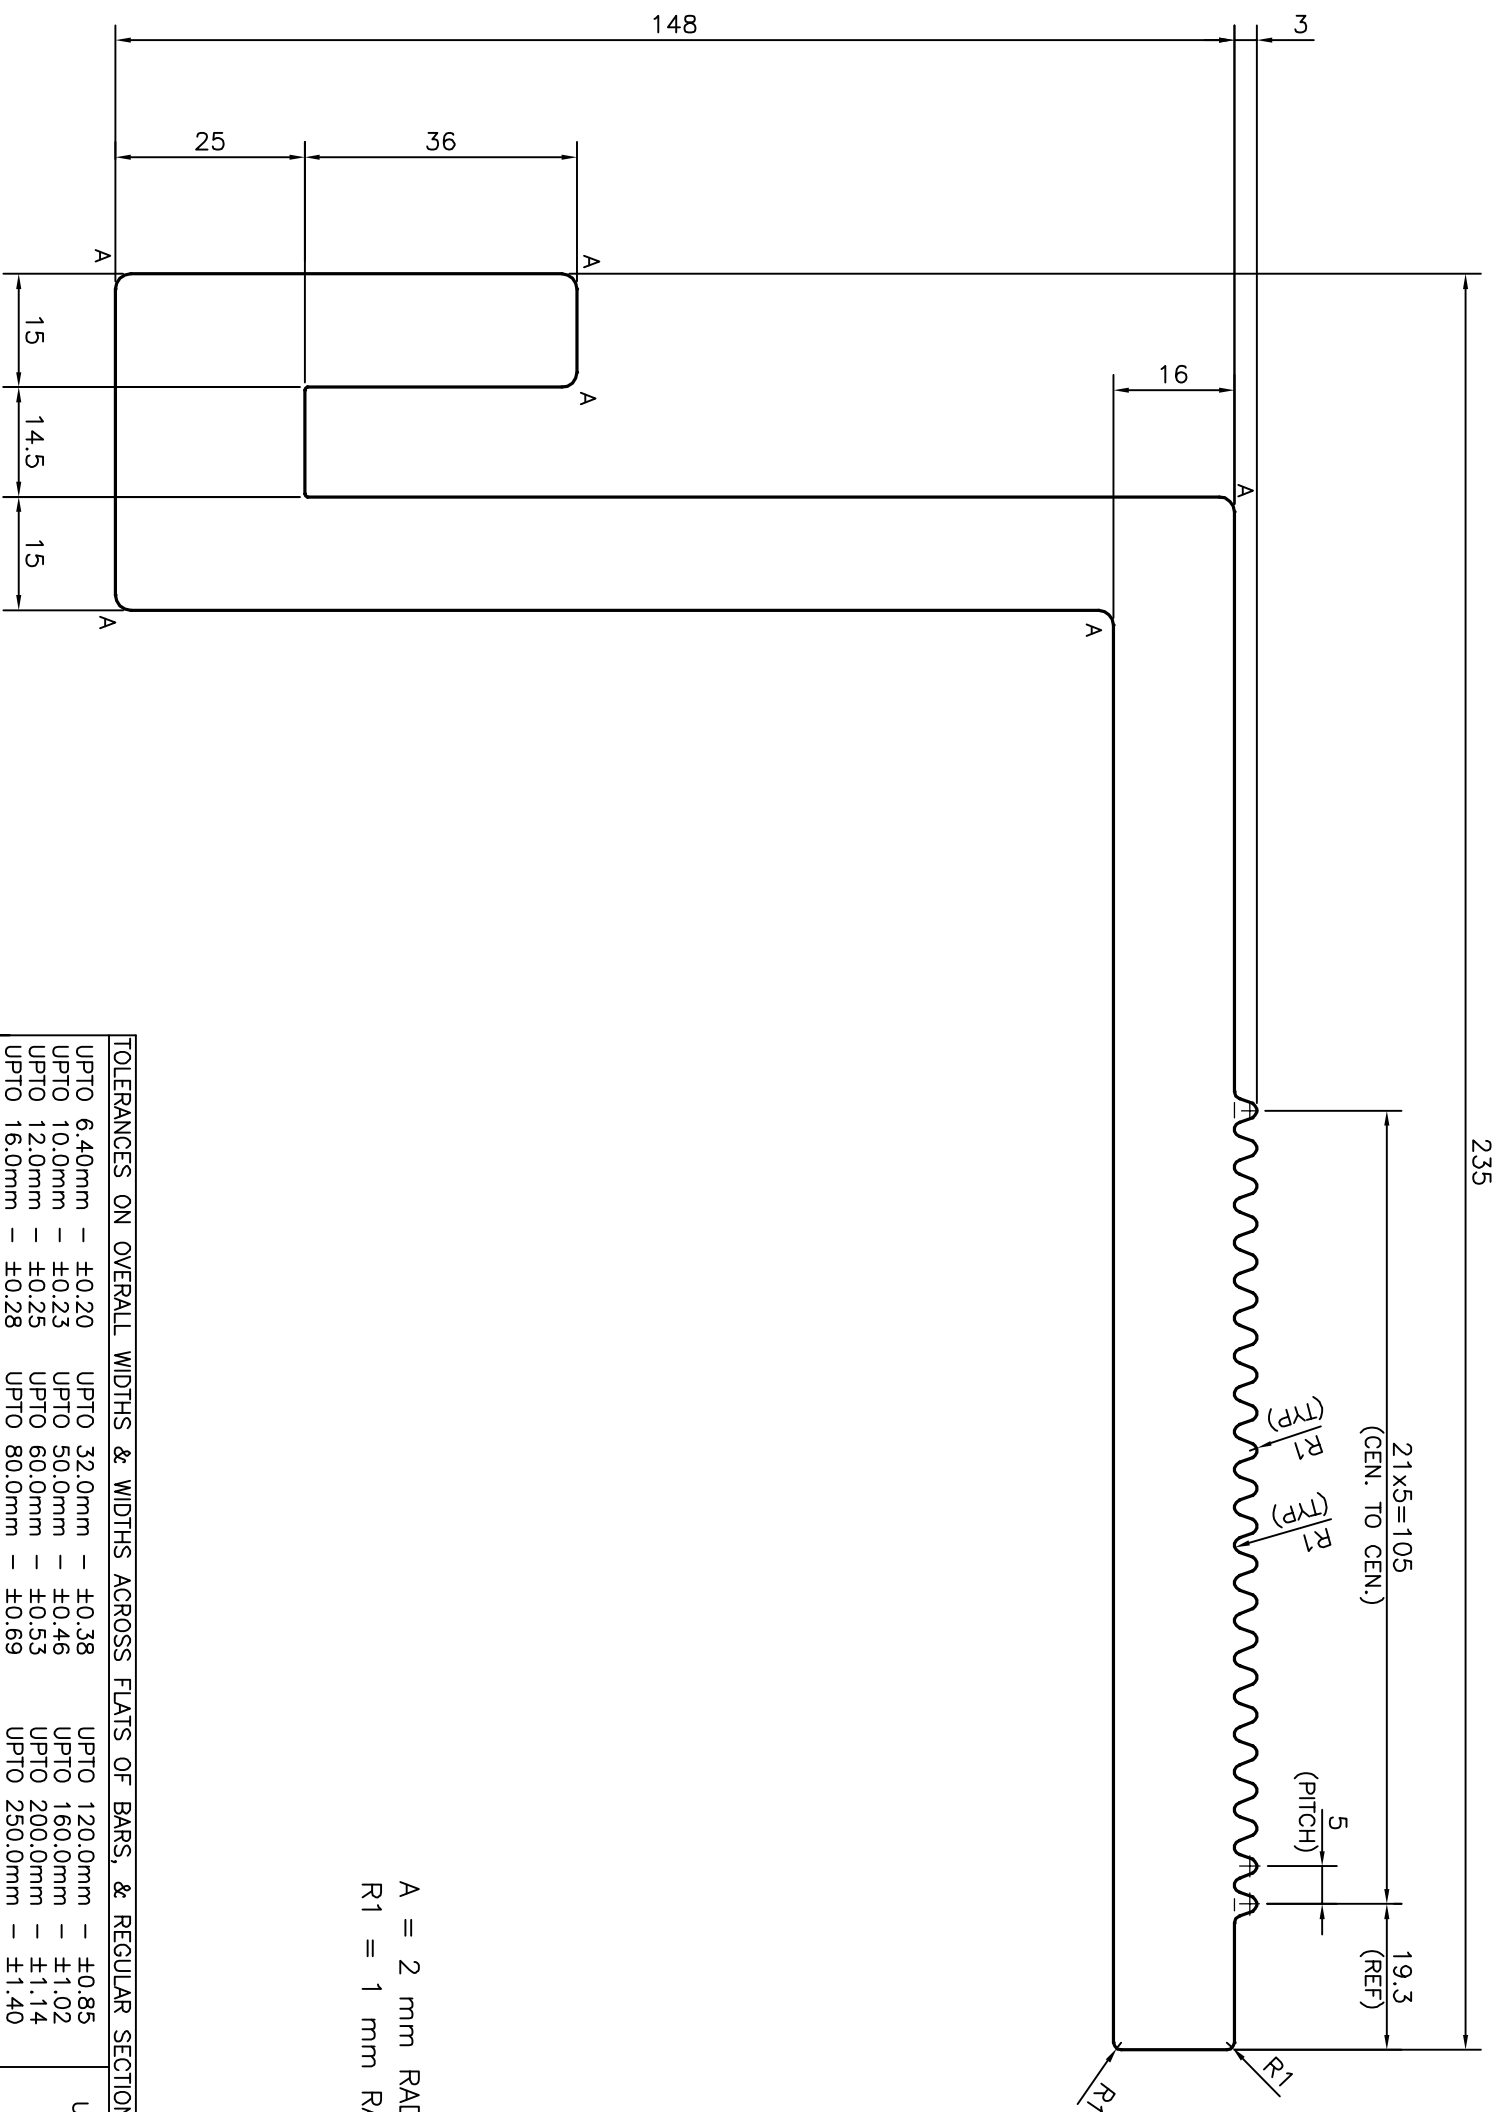

A = 2 mm RADIUS (6 PLACES)  
R1 = 1 mm RADIUS

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 <p><b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)</p>		<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED</p>		
PARTY'S NAME	STAR ALUBUILD PVT. LTD., GURGAON	
PARTY'S DRAWING No.	UCW-BRK1-235 148 & AS PER REQUIREMENT	
ALLOY & TEMPER	6061 T6	
DESCRIPTION	CURTAIN WALL SECTION	

SCALE	1:1
AREA mm <sup>2</sup>	6706.706
PERIMETER mm.	908.129
WEIGHT kg/m	18.108
DRAWING No.	SECTION No.
P-12747-2	-
S3757	S3757
35864	35864