


P-20725-1

36189

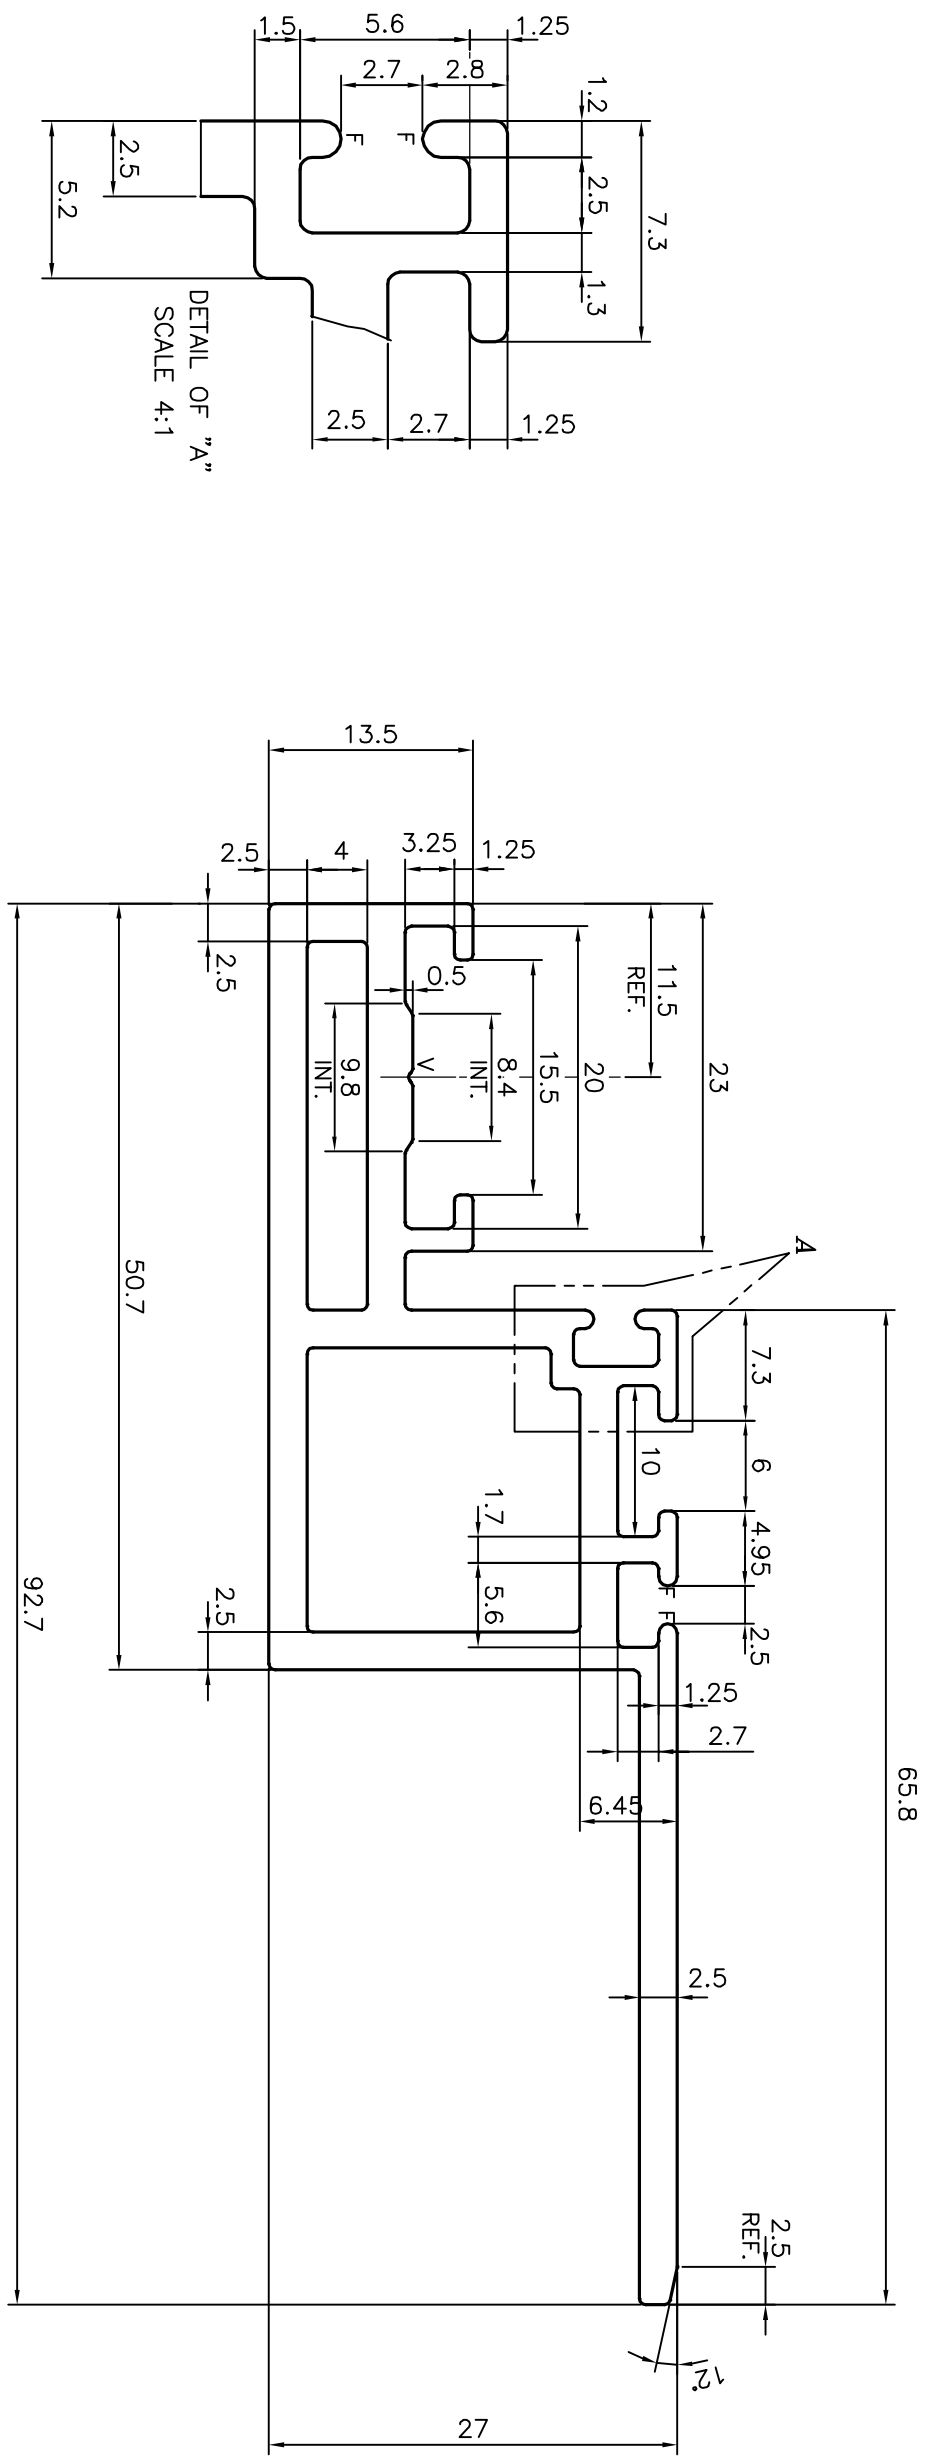

F = FULL RADIUS (4 PLACES)
V = V GROOVE 0.3x90° (1 PLACE)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH

<p>JINDAL SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>		<p>JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)</p>		<p>NAME J.P. KAUSHIK</p>	<p>DATE 20-02-2020</p>
<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED</p>		<p>SCALE 2:1</p>		<p>APPROVED B.NATARAJA 01-08-2020</p>	
<p>PARTY'S NAME MUMBAI</p>	<p>GLAZE TECHNOD FACADE SYSTEM PVT. LTD., MUMBAI</p>	<p>AREA mm² 510.53</p>	<p>PERIMETER mm. 301.728</p>	<p>WEIGHT kg/m 1.378</p>	<p>SECTION No.</p>
<p>PARTY'S DRAWING No. AS PER DRAWING</p>	<p>6063 T6</p>	<p>DRAWING No. P-20725-1</p>	<p>36189</p>	<p>SECTION No. -</p>	<p>36189</p>
<p>ALLOY & TEMPER</p>	<p>6063 T6</p>	<p>DESCRIPTION CURTAIN WALL SECTION-SASH PROFILE</p>			

