P−21903

38778



SCALE:- 1:1

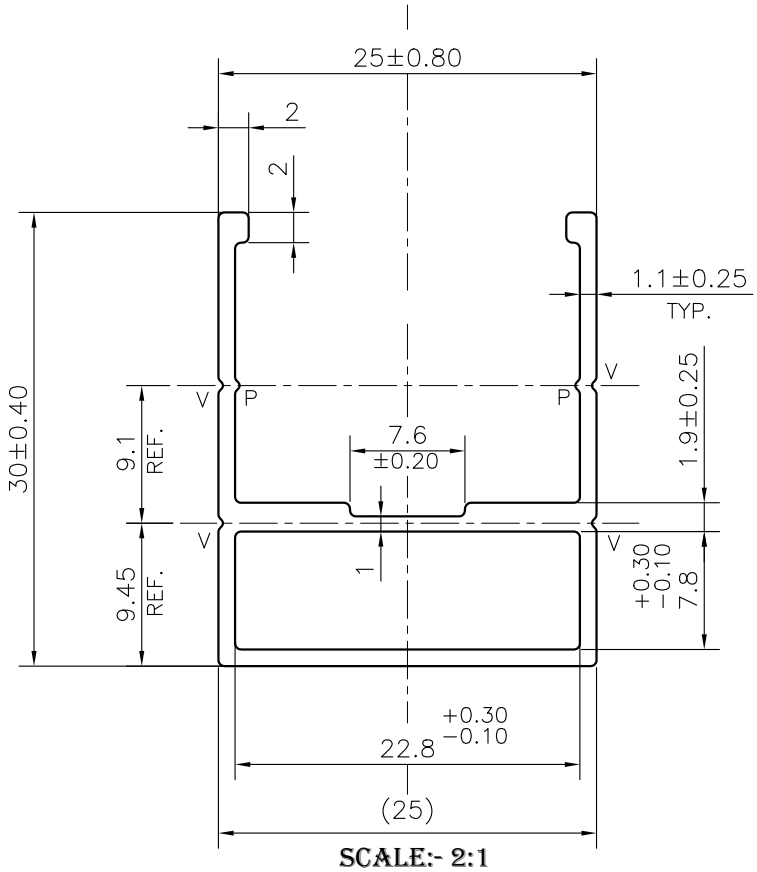

SCALE:- 2:1

APPROXIMATE WEIGHT RANGE −0.272 − 0.432 kg/m

P="PIP" 0.3x90° (2 PLACES)
V="V" GROOVE 0.3x90° (4 PLACES)

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE			
CD≤100	100<CD≤200	200<CD<300	300<CD<500
UPTO 10mm − ±0.25	±0.30	±0.35	±0.40
10.0 − 25 − ±0.30	±0.40	±0.50	±0.60
25.0 − 50 − ±0.50	±0.60	±0.80	±0.90
50.0 −100 − ±0.70	±0.90	±1.10	±1.30
100 − 150 − −	±1.10	±1.30	±1.50
150 − 200 − −	±1.3	±1.50	±1.80
200 − 300 − −	−	±1.70	±2.10
300 − 450 − −	−	−	±2.80

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.007xWIDTH

JINDAL

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BANGALORE−560073 (INDIA)

	NAME	DATE
DRAWN	DARPAN	25−12−2020
CHECKED		
APPROVED	B.NATARAJA	31−12−2020

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN−755−9 , UNLESS OTHERWISE SPECIFIED

SCALE	2:1
AREA mm^2	130.825
PERIMETER mm.	152.183
WEIGHT kg/m	0.353

PARTY'S NAME	SUNRISE BUILDING SYSTEMS, NEW DELHI
PARTY'S DRAWING No.	AS PER DRAWING
ALLOY & TEMPER	6063 T6
DESCRIPTION	ARCHITECTURAL SECTION

DRAWING No.	SECTION No.
P−21903	−
38778	38778