


P-23569-1

43676

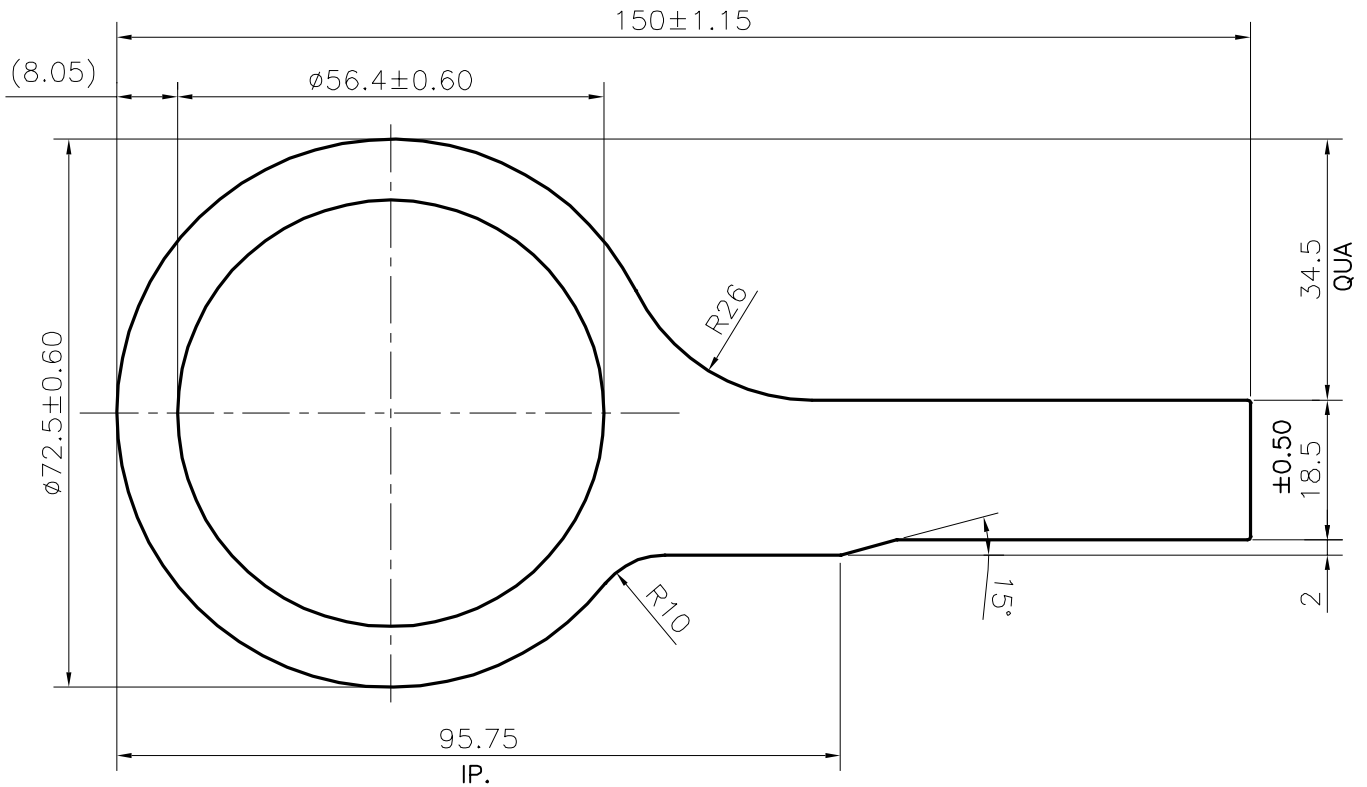

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm – ±0.30
 UPTO 30.0mm – ±0.38
 UPTO 40.0mm – ±0.45
 UPTO 50.0mm – ±0.52
 UPTO 60.0mm – ±0.60

UPTO 80.0mm – ±0.70
 UPTO 100.0mm – ±0.80
 UPTO 120.0mm – ±0.90
 UPTO 140.0mm – ±1.00
 UPTO 160.0mm – ±1.14

UPTO 180.0mm – ±1.27
 UPTO 200.0mm – ±1.40
 UPTO 225.0mm – ±1.52

1. STRAIGHTNESS= 1.7mm/M
 2. TWIST= 1.7mm/M
 3. ANGULARITY= ±2°
 4. FLATNESS= 0.007xWIDTH



SYMBOL OF QUALITY
 AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
 BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	SONU	21-02-2022
CHECKED		
APPROVED	B.NATARAJA	24-03-2022

1. ALL DIMENSIONS ARE IN mm.
 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
 3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm ²	3213.755
PERIMETER mm.	378.494
WEIGHT kg/m	8.677

PARTY'S NAME	STORK RUBBER PRODUCTS (P) LTD., GURGAON
PARTY'S DRAWING No.	AS PER DRAWING & REQUIREMENT
ALLOY & TEMPER	6063 T6
DESCRIPTION	INDUSTRIAL SECTION

DRAWING No.	SECTION No.
P-23569-1	-
43676	43676